


STANDARD SERIES FLASHLIGHTS

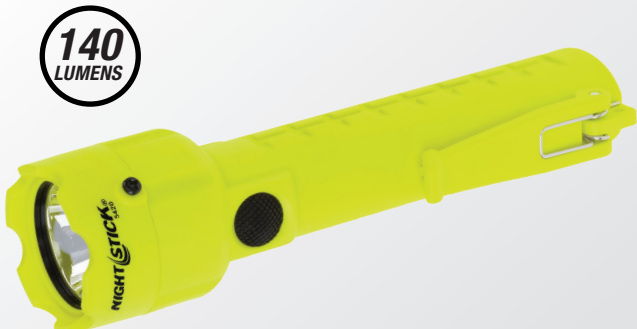

140
LUMENS

XPP-5420G


Safety Rating	Class I Div 1 Groups A-D T3
Runtime	14 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof



120
LUMENS

XPP-5422G


Safety Rating	Class I Div 1 Groups A-D T3
Runtime	17.5 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof

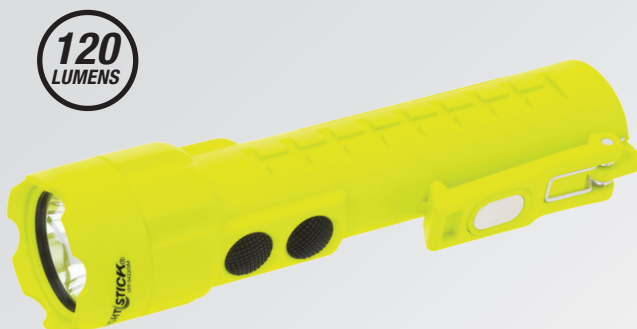

120
LUMENS

XPP-5422GM

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	17.5 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof

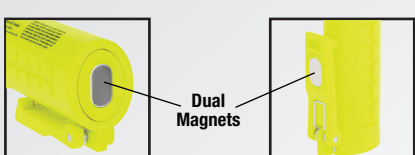

X-SERIES FLASHLIGHTS



210
LUMENS

XPP-5420GX

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	14 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof



285
DUAL-LIGHT
LUMENS

XPP-5422GX


Safety Rating	Class I Div 1 Groups A-D T3
Runtime	14 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof



285
DUAL-LIGHT
LUMENS

XPP-5422GMX

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	14 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof

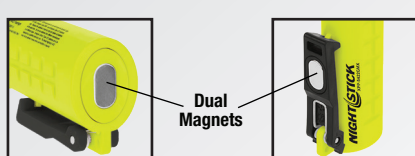

PENLIGHTS



30
LUMENS

XPP-5410G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	18 hrs
Batteries	2 AAA
Water Rating	IP-X7 Rated Waterproof



50
LUMENS

XPP-5412G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	13.75 hrs
Batteries	3 AAAA
Water Rating	IP-X7 Rated Waterproof

THE NIGHTSTICK DIFFERENCE

Nightstick, designed and manufactured by Bayco Products, Inc., is a global brand of professional lighting products including flashlights, headlamps and Intrinsically Safe lighting solutions that exceed the industry standards in performance, quality, user-safety and value. For over 30 years, Bayco Products, Inc. has been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized world-wide as high-performance, high-quality, high-value lighting solutions across virtually every industry. Headquartered in North Texas, Bayco Products' 110,000 square foot facility is the international headquarters for R&D, engineering, marketing, sales and distribution. Bayco Products has dedicated ISO 9001 Certified factories both in the US and abroad. www.mynightstick.com

HEADLAMPS



60
LUMENS

XPP-5450G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	13.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



115
LUMENS

XPP-5452G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	4.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



160
DUAL-LIGHT
LUMENS

XPP-5454G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



175
DUAL-LIGHT
LUMENS

XPP-5456G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	18 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof



190
DUAL-LIGHT
LUMENS

XPP-5458G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	14 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof



200
DUAL-LIGHT
LUMENS

XPP-5460GX

Safety Rating	Class I Div 1 Groups A-D T4
Runtime	3.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



310
DUAL-LIGHT
LUMENS

XPP-5462GX

Safety Rating	Class I Div 1 Groups A-D T4
Runtime	6.75 hrs
Batteries	3 AA
Water Rating	IP-X7 Rated Waterproof

RECHARGEABLE FLASHLIGHTS



240
LUMENS

XPR-5522GMX

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	8 hrs
Batteries	Rechargeable Li-ion
Water Rating	IP-X7 Rated Waterproof



260
LUMENS

XPR-5542GMX

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	9.5 hrs
Batteries	Rechargeable Li-ion
Water Rating	IP-X7 Rated Waterproof

ZERO BAND HEADLAMPS



60
LUMENS

XPP-5450GC

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	13.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



115
LUMENS

XPP-5452GC

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	4.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



160
DUAL-LIGHT
LUMENS

XPP-5454GC

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof



200
DUAL-LIGHT
LUMENS

XPP-5460GCX

Safety Rating	Class I Div 1 Groups A-D T4
Runtime	3.5 hrs
Batteries	3 AAA
Water Rating	IP-X7 Rated Waterproof

HELMET-MOUNTED FLASHLIGHT



250
LUMENS

XPP-5466G

Safety Rating	Class I Div 1 Groups A-D T4
Runtime	2.5 hrs
Batteries	2 CR-123
Water Rating	IP-X7 Rated Waterproof

ANGLE LIGHTS



200
LUMENS

XPP-5570G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	21 hrs
Batteries	6 AA
Water Rating	IP-X7 Rated Waterproof



200
LUMENS

XPR-5572G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	6 hrs
Batteries	Rechargeable Li-ion
Water Rating	IP-X7 Rated Waterproof

RECHARGEABLE LANTERN



300
DUAL-LIGHT
LUMENS

XPR-5580G

Safety Rating	Class I Div 1 Groups A-D T3
Runtime	12 hrs
Batteries	Rechargeable Li-ion
Water Rating	IP-X7 Rated Waterproof




CAP LAMP





90
LUMENS





XPR-5560G


Safety Rating	Class I Div 1 Groups A-D T4
Runtime	15 hrs
Batteries	Rechargeable Li-ion
Water Rating	IP-67 Rated Waterproof





STANDARD SERIES FLASHLIGHTS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5420G			140	14	180 m	7,500	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5422G	Yes	Yes	120 / 120 / 240	17.5 / 17.5 / 4.5	170 m	7,250	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5422GM	Yes	Yes	120 / 120 / 240	17.5 / 17.5 / 4.5	170 m	7,250	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)


X-SERIES FLASHLIGHTS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5420GX			210	14	187 m	7970	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5422GX	Yes	Yes	210 / 130 / 285	14 / 20 / 10	187 m	7970	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5422GMX	Yes	Yes	210 / 130 / 285	14 / 20 / 10	187 m	7970	Waterproof	Polymer	3 AA (not included)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)




PENLIGHTS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5410G			30	18	40 m	107	Waterproof	Polymer	2 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5412G			50	13.75	50 m	161	Waterproof	Polymer	3 AAAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T3, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)


HEADLAMPS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5450G		Yes	60 / 40	13.5 / 22.75	80 / 65 m	1,615 / 1,076	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga
	XPP-5452G		Yes	115 / 65	4.5 / 13	92 / 67 m	2,152 / 1,141	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga
	XPP-5454G	Yes	Yes	115 / 60 / 120 / 60 / 160	5 / 16.25 / 5.25 / 16.75 / 3.5	82 / 60 m	1,668 / 882	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5456G	Yes	Yes	100 / 90 / 20 / 18 / 175	18 / 13.5 / 7.5 / 37 / 6.5	140 m	4,820	Waterproof	Polymer	3 AA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1
	XPP-5458G	Yes	Yes	130 / 100 / 25 / 21 / 190	14 / 12.5 / 70 / 37 / 6	120 m	3,500	Waterproof	Polymer	3 AA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, I M1 Ex ia I Ma, II 1 G Ex ia IIC T3 Ga, Ex ia I Ma, Ex ia IIC T3 Ga, MSHA: CRF 30 Part 20 Class 1
	XPP-5460GX	Yes	Yes	180 / 100 / 180 / 100 / 200	3.5 / 9.75 / 2.75 / 10.5 / 2.75	106 m	2,799	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T4, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T4 Ga, Class I Zone 0 Ex ia IIC T4 Ga, II 1 G Ex ia IIC T4 Ga, Ex ia IIC T4 Ga
	XPP-5462GX	Yes	Yes	275 / 100 / 250 / 100 / 310	6.75 / 27.75 / 6.25 / 20.25 / 6	120 m	3,660	Waterproof	Polymer	3 AA	Limited Lifetime	Class I Div 1 Grps A-D T4, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T4 Ga, Class I Zone 0 Ex ia IIC T4 Ga, II 1 G Ex ia IIC T4 Ga, Ex ia IIC T4 Ga



RECHARGEABLE FLASHLIGHTS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPR-5522GMX	Yes		240 / 175 / 400	8	150 m	5,381	Waterproof	Polymer	Rechargeable Lithium-ion	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II Div 1 Grps E-G T3, Class III Div 1 T165°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPR-5542GMX	Yes	Yes	260 / 200 / 150	9.5 / 8 / 4	147 m	5,430	Waterproof	Polymer	Rechargeable Lithium-ion	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga

ZERO BAND SERIES	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5450GC		Yes	60 / 40	13.5 / 22.75	80 / 65 m	1,615 / 1,076	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga
	XPP-5452GC		Yes	115 / 65	4.5 / 13	92 / 67 m	2,152 / 1,141	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga
	XPP-5454GC	Yes	Yes	115 / 60 / 120 / 60 / 160	5 / 16.25 / 5.25 / 16.75 / 3.5	82 / 60 m	1,668 / 882	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga, InMetro: Ex ia I Ma, Ex ia IIC T3 Ga (-20°C ≤ Tamb ≤ +40°C)
	XPP-5460GCX	Yes	Yes	180 / 100 / 180 / 100 / 200	3.5 / 9.75 / 2.75 / 10.5 / 2.75	106 m	2,799	Waterproof	Polymer	3 AAA	Limited Lifetime	Class I Div 1 Grps A-D T4, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T4 Ga, Class I Zone 0 Ex ia IIC T4 Ga, II 1 G Ex ia IIC T4 Ga, Ex ia IIC T4 Ga

HELMET-MOUNTED FLASHLIGHT	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5466G	Yes	Yes	250 / 100 / 20 135 / 60 / 15 / 125	2.5 / 10 / 30 2.5 / 21 / 60 / 3.25	208 m	10,800	Waterproof	ADC12 Aluminum Alloy	2 CR-123	Limited Lifetime	Class I Div 1 Grps A-D T4, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T4 Ga, Class I Zone 0 Ex ia IIC T4

ANGLE LIGHTS	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPP-5570G	Yes	Yes	200 / 100 / 60 200 / 100 / 20 / 200	21 / 42 / 84 21 / 42 / 84 21	267 m 199 m 145 m	22,249 14,828 7,790	Waterproof	Polymer	6 AA	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G, Class I Zone 0 IIC T3, Class II Zone 20 IIIC T3, MSHA: CRF 30 Part 20 Class 1
	XPR-5572G	Yes	Yes	200 / 100 / 60 200 / 100 / 20 / 200	6 / 11.5 / 22.5 6 / 11.5 / 30 6	267 m 199 m 145 m	22,249 14,828 7,790	Waterproof	Polymer	Rechargeable Lithium-ion (or 6 AA)	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G, Class I Zone 0 IIC T3, Class II Zone 20 IIIC T3, MSHA: CRF 30 Part 20 Class 1
	5572-BASE								Polymer		2 Year Limited	

RECHARGEABLE LANTERN	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPR-5580G	Yes	Yes	200 / 100 / 30 200 / 100 / 30 / 300	12.5 / 24.75 / 64 14 / 24.75 / 64 / 9.25	384 m	37,125	Waterproof	Polymer	Rechargeable Lithium-ion	Limited Lifetime	Class I Div 1 Grps A-D T3, Class II & III Div 1 Grps E-G T135°C, Class I Zone 0 AEx ia IIC T3 Ga, Class I Zone 0 Ex ia IIC T3 Ga, II 1 G Ex ia IIC T3 Ga, Ex ia IIC T3 Ga

RECHARGEABLE CAP LAMP	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Warranty	Certification
	XPR-5560G	Yes	Yes	90 / 45 / 90 / 5 / 180	15 / 22 / 15 / 170 / 6	47 m	553	Waterproof	Polymer	Rechargeable Lithium-ion	Limited Lifetime	MSHA: CRF 30 Part 20 Class 1
	5560-CHGR10									AC	2 Year Limited	UL Listed, CE

TESTING LABORATORIES



ETL
The ETL Listed Mark is proof of product compliance (electrical, gas and other safety standards) to North American safety standards, including UL, ANSI, CSA, ASTM and NFPA standards.



cULus
The cULus Listed Mark indicates products have been evaluated and are in compliance with both Canadian and U.S. safety requirements.



ATEX Directive
The European based ATEX directive defines the equipment and work environment that is allowed to function in an explosive atmosphere. The regulations apply to all equipment intended for use in explosive atmospheres, either electrical or mechanical, including protective systems.



CE
CE mark is the official marking required by the European Community for products that will be sold, or put into service in the European community. The product fulfills all essential safety and environmental requirements for the product's intended use, as they are defined in the European Directives, primarily ISO Standards.



IECEx
The IECEx is the International Electrotechnical Commission system for the certification to standards for electrical equipment for explosive atmospheres.



MSHA
Mine Safety and Health Administration requires that portable battery operated lighting be designed and tested to not pose an explosion hazard in mining operations.



INMETRO
National Institute of Metrology, Quality and Technology (Inmetro) supports Brazilian enterprises, to increase their productivity and the quality of goods and services.

CERTIFICATION CHART

XPP-5420G	✓		✓	✓	✓	✓	✓
XPP-5422G	✓		✓	✓	✓	✓	✓
XPP-5422GM	✓		✓	✓	✓	✓	✓
XPP-5420GX	✓		✓	✓	✓		
XPP-5422GX	✓		✓	✓	✓		
XPP-5422GMX	✓		✓	✓	✓		
XPP-5410G	✓		✓	✓		✓	✓
XPP-5412G	✓		✓	✓			
XPP-5450G	✓		✓	✓	✓		✓
XPP-5452G	✓		✓	✓	✓		
XPP-5454G	✓		✓	✓	✓		✓
XPP-5456G	✓		✓	✓	✓		
XPP-5458G	✓		✓	✓	✓	✓	
XPP-5460GX		✓	✓	✓	✓		
XPP-5462GX		✓	✓	✓	✓		
XPR-5522GMX	✓		✓	✓	✓	✓	
XPR-5542GMX		✓	✓	✓	✓		
XPP-5450GC	✓		✓	✓	✓		
XPP-5452GC	✓		✓	✓	✓		
XPP-5454GC	✓		✓	✓	✓		✓
XPP-5460GCX		✓	✓	✓	✓		
XPP-5466G		✓		✓	✓		
XPP-5570G		✓		✓		✓	
XPR-5572G		✓		✓		✓	
XPR-5580G		✓		✓	✓		
XPR-5560G				✓		✓	



BAYCO PRODUCTS INC.
640 S. Sanden Blvd.
Wylie, TX 75098
(800) 233-2155
(469) 326-9400

www.mynightstick.com

Nightstick products are designed in Texas, US and manufactured abroad with components from domestic and international sources.

The distinctive shapes, styles, packaging, configurations and overall appearances of these products are trademarks of Bayco Products, Inc.

The unique LED configuration, body and case shapes inherently identify them as members of the Bayco Products, Inc. portfolio.










FLY-ISMAT-17B



INTRINSICALLY SAFE LIGHTING FOR HAZARDOUS ENVIRONMENTS




WWW.MYNIGHTSTICK.COM

UNDERSTANDING DUAL-LIGHT™ TECHNOLOGY



Flashlight

Has a focused long throw beam that is designed for distance illumination. The center spot is too bright for objects that are close-up.



Floodlight

Has a wide, even flood of light that is designed for close-up illumination. The absence of the center spot allows the user to light up areas that are close-up without the blinding bounce back of light.



Dual-Light™

Combines both a long throw beam of light and a wide, even flood of light. Turning on both the flashlight and the floodlight at the same time allows the user maximum lighting versatility on the job.

Life Depends on Light™