

# NIGHTSTICK®

Tough, Durable, Affordable™

## Professional Lighting Products

*Military*

*Law Enforcement*

*Fire/EMS*

*Automotive*

*Aviation*

*Industrial*

*Marine*



**BAYCO**  
PRODUCTS INC.  
**30+**  
**YEARS**  
SINCE 1984

# 2016

## Mini-TAC Pgs 8-9



## Mini-TAC Pro Pgs 10-11



## Mini-TAC UV Pgs 12-13





# Tactical Pgs 14-43

TAC 300 Series Waterproof

TAC 400 Series Rechargeable / Waterproof

TAC 500 Series Rechargeable / Waterproof / Multi-Function



Also available in:



Also available in:



Also available in:



## Tactical Dual-Light™ Flashlights Pgs 44-47

Metal / Waterproof / Multi-Function



## Area Lights Pgs 48-51

Rechargeable / Metal / Waterproof



## Long Gun Light Kits

Pgs 52-57



## Helmet Light Kits and Mounts

Pgs 58-65



## Duty/Personal-Size

Pgs 66-79

NSR 9000 Series Rechargeable / Waterproof / Multi-Function



## Full-Size

Pgs 80-83





# Multi-Purpose Pgs 84-103


Multi-Function Polymer / Flashlight / Floodlight / Dual-Light

|   |  |  |   |   |   |  |
|---|--|--|---|---|---|--|
| <p><b>130 L</b></p>  <p>NSP-2422B</p>  | <p><b>230 L</b></p>  <p>SLR-2166</p> | <p><b>230 L</b></p>  <p>NSR-2166B</p> | <p><b>230 L</b></p>  <p>NSR-2166R</p> | <p><b>600 L</b></p>  <p>NSR-2168B</p> | <p><b>600 L</b></p>  <p>NSR-2168R</p> |  |
| <p><b>130 L</b></p>  <p>NSP-2422R</p>  |  |  |   |   |   |  |
| <p><b>250 L</b></p>  <p>NSR-2522RM</p> |  |  |   |   |   |  |
| <p><b>200 L</b></p>  <p>NSR-2492</p>  |  |  |   |   |   |  |
| <p>NSP-1206B</p>  |  |  |   |   |   |  |
| <p><b>9 L</b></p>  <p>NSP-1206R</p>  |  |  |   |   |   |  |
| <p>NSP-1206R</p>  |  |  |   |   |   |  |
| <p><b>65 L</b></p>  <p>NSP-1224R</p> |  |  |   |   |   |  |
| <p><b>65 L</b></p>  |  |  |   |   |   |  |
|  <p>NSP-1224B</p>                    |  |  |   |   |   |  |
| <p><b>150 L</b></p>   |  |  |   |   |   |  |
|  <p>NSP-1260</p>                     | <p><b>60 L</b></p>   |  <p>NSP-1400B</p>                    |  <p>NSP-1400R</p>                    |  <p>NSP-1400T</p>                    |  <p>NSP-1402B</p>                    |  <p>NSP-1404B</p> |
| <p><b>1200 L</b></p>  |  |  |   |   |   |  |
|  <p>SLR-2120</p>                    |  |  |   |   |   |  |
| <p><b>650 L</b></p>   |  |  |   |   |   |  |
|  <p>NSR-2124</p>                    |  |  |   |   |   |  |

## Headlamps Pgs 104-117



## Safety Lights Pgs 148-151

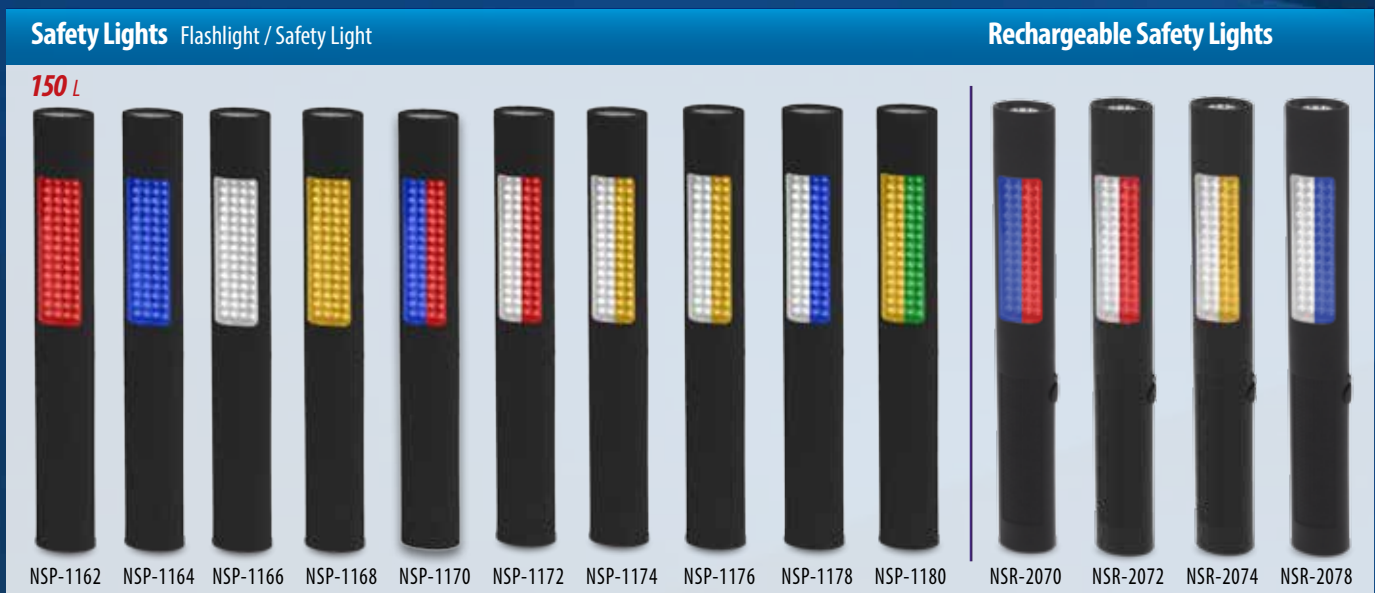

## Traffic Wands Pgs 152-153






# Intrinsically Safe Pgs 118-147

**Penlights / Flashlights / Headlamps / Angle Lights** Non-Rechargeable / Polymer

Nightstick Intrinsically Safe flashlights and headlamps are cETLus, ATEX and IECEx listed Intrinsically Safe

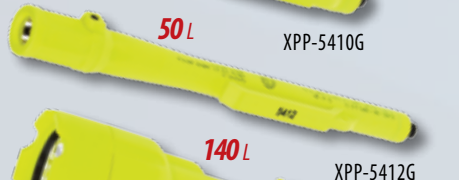

Nightstick Intrinsically Safe Dual-Light Angle Lights are cULus and MSHA listed Intrinsically Safe



# Mini-TAC - Metal

## Mini-TAC



These Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MT-100, 100BL, 100R, 110 and 120 each come with a removable pocket clip, while the MT-130 and MT-140's gooseneck design, comes with a removable clip-on magnet for hands-free use. The MT-110, 120, 130 and 140 also include a removable wrist lanyard. The MT-100s are powered by two AAA batteries. The MT-110 uses a single AA. And both the MT-120, 130 and 140 use two AA batteries. In all cases, the batteries are included.

MT-120



Flashlight



**140 Lumens**

- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



MT-100 MT-100BL MT-100R MT-110



MT-130 MT-140B





# Mini-TAC - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MT-100s), 1 AA (MT-110), 2 AA (MT-120/130/140)
- Limited Lifetime Warranty



Magnetic base (MT-130 & MT-140B)



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## INCLUDED


- Flashlight
- Removable pocket clip (MT-100, 100BL, 100R, 110 & 120)
- Removable wrist lanyard (MT-110, 120, 130, & 140)
- Hands-free magnet (MT-130 & MT-140B)
- Battery(ies)



| Model    | Description   | UPC 0 17398 |
|----------|---|-------------|
| MT-100   | Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip                                   | 80369 4     |
| MT-100BL | Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip                                   | 80425 7     |
| MT-100R  | Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip                                   | 80426 4     |
| MT-110   | Non-rechargeable mini tactical flashlight with 1 AA battery, removable pocket clip and removable wrist lanyard              | 80370 0     |
| MT-120   | Non-rechargeable mini tactical flashlight with 2 AA batteries, removable pocket clip and removable wrist lanyard            | 80371 7     |
| MT-130   | Non-rechargeable mini tactical gooseneck flashlight with 2 AA batteries, removable magnetic base and wrist lanyard          | 80372 4     |
| MT-140B  | Non-rechargeable mini tactical extended gooseneck flashlight with 2 AA batteries, removable magnetic base and wrist lanyard | 80509 4     |


## MT-100 SPECIFICATIONS

- Lumens: 100
- Run-time: 1.5 hours
- Beam distance: 44 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, dia: 0.6in, weight: .8oz




## MT-110 SPECIFICATIONS

- Lumens: 90
- Run-time: 1 hours
- Beam distance: 48 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 3.9in, dia: 0.9in, weight: 1.5oz




## MT-120 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.6in, dia: 0.9in, weight: 2.3oz




## MT-130 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)



## MT-140B SPECIFICATIONS

- Lumens: 180
- Run-time: 2.5 hours
- Beam distance: 99 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 22.5in, diameter: 0.9in, weight: 7.7oz (without magnetic base)



# Mini-TAC Pro - Metal

## Mini-TAC Pro



These Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a waterproof design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type III hard anodized finish. The tail switch on the MT-200, 210 and 220 provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The MT-230, specifically design for EMS, has momentary or constant-on functionality and 3 user-selectable brightness modes as well, but starts off in low and cycles up through the medium and high settings. All 4 lights come with a removable pocket clip. The MT-200 is powered by a two AAA batteries. The MT-210 and 230 each use a single AA. And the MT-220 uses two AA batteries. In all cases, the batteries are included.



MT-220

**200 Lumens**

- Momentary or constant-on, plus 3 user-selectable brightness settings plus strobe (no strobe on MT-230)
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



MT-200

MT-210

MT-230



# Mini-TAC Pro - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight plus 3 brightness levels & strobe (no strobe on MT-230)
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type III hard anodized finish
- Non-slip grip
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by: 2 AAA (MT-200), 1 AA (MT-210/230), 2 AA (MT-220)
- Limited Lifetime Warranty\*



Handheld




High-efficiency deep parabolic reflector







Large textured tail-switch

## INCLUDED

- Flashlight
- Removable pocket clip 
- Battery(ies)

| Model  | Description   | UPC 0 17398 |
|--------|---|-------------|
| MT-200 | Non-rechargeable Mini-TAC Pro flashlight with 2 AAA batteries and pocket clip         | 80405 9     |
| MT-210 | Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip | 80373 1     |
| MT-220 | Non-rechargeable Mini-TAC Pro flashlight with 2 AA battery, and removable pocket clip | 80374 8     |
| MT-230 | Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip | 80375 5     |





## MT-200 SPECIFICATIONS

| FL1 STANDARD  | HIGH       | MEDIUM    | LOW       |
|---|------------|-----------|-----------|
|  | 100 LUMENS | 60 LUMENS | 30 LUMENS |
|  | 1h 30min   | 3h        | 4h 30min  |
|  | 51m        | 36m       | 29m       |
|  | 667cd      | 334cd     | 204cd     |



- Length: 5.5in, head diameter: 0.7in, handle diameter: 0.6in, weight: 1.9oz





## MT-210 SPECIFICATIONS

| FL1 STANDARD  | HIGH       | MEDIUM    | LOW       |
|---|------------|-----------|-----------|
|    | 120 LUMENS | 55 LUMENS | 30 LUMENS |
|   | 1h 30min   | 4h        | 6h        |
|  | 70m        | 51m       | 40m       |
|  | 1227cd     | 656cd     | 398cd     |



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz





## MT-220 SPECIFICATIONS

| FL1 STANDARD  | HIGH       | MEDIUM    | LOW       |
|---|------------|-----------|-----------|
|  | 200 LUMENS | 90 LUMENS | 45 LUMENS |
|  | 1h 30min   | 4h        | 6h        |
|  | 100m       | 73m       | 56m       |
|  | 2486cd     | 1335cd    | 797cd     |



- Length: 6in, head diameter: 0.9in, handle diameter: 0.6in, weight: 3.2oz

## MT-230 SPECIFICATIONS

| FL1 STANDARD  | LOW        | MEDIUM    | HIGH      |
|---|------------|-----------|-----------|
|  | 3.6 LUMENS | 10 LUMENS | 60 LUMENS |
|  | 36h        | 14h       | 2h        |
|  | 4m         | 46m       | 65m       |
|  | 1076cd     | 538cd     | 4cd       |



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz

# Mini-TAC UV - Metal

## Mini-TAC UV



These Mini-TAC UV lights each use an Ultraviolet LED rated at 365 Nanometers for the purpose of detecting hidden security markings in documents, spotting leak detection fluids and as an aid in visually locating proteins in forensics work. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MTU-106 comes with a removable pocket clip, while the MTU-136, with its gooseneck design, comes with a removable wrist lanyard and a removable clip-on magnet for hands-free use. The MTU-106 is powered by two AAA batteries. And the MTU-136 use two AA batteries. In both cases, the batteries are included.



**MTU-106**



**365** Nanometers

- 1.25 Hours run-time
- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- MT-136 Includes a magnetic base for hands-free use



**MTU-136**

MTU-106



MTU-136



# Mini-TAC UV - Metal

## FEATURES: BOTH MODELS


- Ultraviolet LED technology – 50,000+ hours LED
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MTU-106), 2 AA (MTU-136)
- Limited Lifetime Warranty\*

## MTU-106 SPECIFICATIONS

- Nanometers: 365
- Run-time: 0.75 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, diameter: 0.6in, weight: .8oz

## MTU-136 SPECIFICATIONS

- Nanometers: 365
- Run-time: 1.25 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)

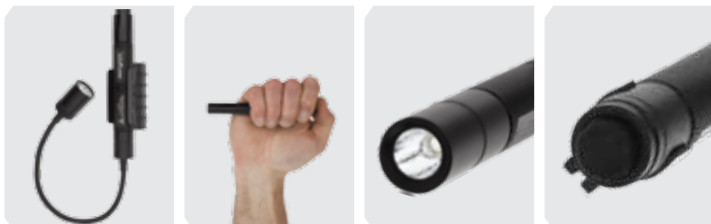

Magnetic base (MTU-136)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

| Model   | Description  | UPC 0 17398 |
|---------|--|-------------|
| MTU-106 | Non-rechargeable mini tactical UV flashlight with 2 AAA batteries and removable pocket clip                            | 80436 3     |
| MTU-136 | Non-rechargeable mini tactical gooseneck UV flashlight with 2 AA batteries, clip-on magnet and removable wrist lanyard | 80437 0     |

## INCLUDED

- Flashlight
- Removable pocket clip (MTU-106)
- Removable wrist lanyard (MTU-136)
- Hands-free magnet (MTU-136)
- Batteries



# Tactical Fire Light - Polymer

## Tactical Fire Light



*This compact polymer tactical fire light uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. The 1" handle diameter allows it to be paired with most 3rd party helmet mounts for use by Fire and Emergency personnel. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 180 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 190 meters**
- **Fits most 3rd party 1" helmet mounts**
- **Powered by 2 – CR-123 Lithium batteries (included)**

**FDL-300R**


FDL-300R




# Tactical Fire Light - Polymer

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Resistant to high temperatures
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most 3rd party helmet mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description                           | UPC 0 17398 |
|-------------|---------------------------------------|-------------|
| FDL-300R    | Red Tactical Fire Light               | 80361 8     |
| 200-RCONE   | Red safety cone                       | 80131 7     |
| 200-YCONE   | Yellow safety cone                    | 80132 4     |
| 400B-RPS    | Remote pressure switch                | 80130 0     |
| 400B-SS     | Side switch                           | 80141 6     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)     | 80112 6     |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights | 80233 8     |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount              | 80451 6     |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap      | 80441 7     |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue | 80498 1     |
| 9810-LH     | Holster - Basket Weave Leather        | 98101 9     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure switch



Side-switch



CR-123 batteries



Holster

# Tactical - Polymer

## Tactical Flashlights



These compact polymer tactical flashlights use a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.



Flashlight



**180 Lumens**

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 190 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)



**TAC-300B**



**TAC-300T**

**TAC-300Y**

TAC-300B

TAC-300T

TAC-300Y






# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Available in black, tan & yellow
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description                           | UPC 0 17398 |
|-------------|---------------------------------------|-------------|
| TAC-300B    | Polymer Tactical Flashlight - Black   | 80219 2     |
| TAC-300T    | Polymer Tactical Flashlight - Tan     | 80220 8     |
| TAC-300Y    | Polymer Tactical Flashlight - Yellow  | 80221 5     |
| 200-RCONE   | Red safety cone                       | 80131 7     |
| 200-YCONE   | Yellow safety cone                    | 80132 4     |
| 400B-RPS    | Remote pressure switch                | 80130 0     |
| 400B-SS     | Side switch                           | 80141 6     |
| CR-123-10   | CR-123 Lithium batteries (10 pack)    | 80112 6     |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights | 80233 8     |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount              | 80451 6     |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap      | 80441 7     |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue | 80498 1     |
| 9810-LH     | Holster - Basket Weave Leather        | 98101 9     |



## Tactical - Polymer

# Tactical Flashlight – Green LED



*This compact polymer tactical flashlight uses a Green CREE® LED rated at 150 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 180 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 150 Lumens

- 3.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 180 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)


**TAC-302B**

TAC-302B




# Tactical - Polymer

## FEATURES: ALL MODELS

- Cree® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description                             | UPC 0   |
|-------------|---|---------|
| TAC-302B    | Polymer Tactical Flashlight - Green LED | 80428 8 |
| 200-RCONE   | Red safety cone                         | 80131 7 |
| 200-YCONE   | Yellow safety cone                      | 80132 4 |
| 400B-RPS    | Remote pressure switch                  | 80130 0 |
| 400B-SS     | Side switch                             | 80141 6 |
| CR-123-10   | CR-123 Lithium batteries (10 pack)      | 80112 6 |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights   | 80233 8 |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights   | 80454 7 |
| NS-HMC1     | Multi-Angle Helmet Mount                | 80451 6 |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap        | 80441 7 |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue   | 80498 1 |
| 9810-LH     | Holster - Basket Weave Leather          | 98101 9 |





## Tactical - Xtreme Lumens™ - Polymer

# Xtreme Lumens™ Tactical Flashlight



*This compact polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 500 Lumens

- 1.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Glass-filled nylon polymer housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-310XL**


TAC-310XL



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 1.5 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip




Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

| Model       | Description                                | UPC 0 17398 |
|-------------|--|-------------|
| TAC-310XL   | Xtreme Lumens™ Polymer Tactical Flashlight | 80417 2     |
| 200-RCONE   | Red safety cone                            | 80131 7     |
| 200-YCONE   | Yellow safety cone                         | 80132 4     |
| 400B-RPS    | Remote pressure switch                     | 80130 0     |
| 400B-SS     | Side switch                                | 80141 6     |
| CR-123-10   | CR-123 Lithium batteries (10 pack)         | 80112 6     |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights      | 80233 8     |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights      | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount                   | 80451 6     |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap           | 80441 7     |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue      | 80498 1     |
| 9810-LH     | Holster - Basket Weave Leather             | 98101 9     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones




Remote pressure  
switch



Side-switch



CR-123 batteries



Holster

## Tactical - Metal

# Tactical Flashlight



*This compact metal tactical flashlight uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 180 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 190 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by 2 – CR-123 Lithium batteries (included)**

**TAC-350B**


TAC-350B



# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 5.7oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



## MODELS/ACCESSORIES

| Model       | Description                           | UPC 0 17398 |
|-------------|---------------------------------------|-------------|
| TAC-350B    | Metal Tactical Flashlight             | 80242 0     |
| 200-RCONE   | Red safety cone                       | 80131 7     |
| 200-YCONE   | Yellow safety cone                    | 80132 4     |
| 400B-RPS    | Remote pressure switch                | 80130 0     |
| 400B-SS     | Side switch                           | 80141 6     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)     | 80112 6     |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights | 80233 8     |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount              | 80451 6     |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap      | 80441 7     |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue | 80498 1     |
| 9810-LH     | Holster - Basket Weave Leather        | 98101 9     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure  
switch



Side-switch



CR-123 batteries



Holster



## Tactical - Xtreme Lumens™ - Metal

# Xtreme Lumens™ Tactical Flashlight



This compact metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a pair of included CR-123 Lithium batteries.



Flashlight



# 500 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-360XL**


TAC-360XL





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 1.5 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle diameter: 1.035in,  
weight: 5.7oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

| Model       | Description                              | UPC 0 17398 |
|-------------|--|-------------|
| TAC-360XL   | Xtreme Lumens™ Metal Tactical Flashlight | 80364 9     |
| 200-RCONE   | Red safety cone                          | 80131 7     |
| 200-YCONE   | Yellow safety cone                       | 80132 4     |
| 400B-RPS    | Remote pressure switch                   | 80130 0     |
| 400B-SS     | Side switch                              | 80141 6     |
| CR-123-10   | CR-123 Lithium batteries (10 pack)       | 80112 6     |
| 200-HOLSTER | Holster - Cordura - TAC Series Lights    | 80233 8     |
| 300-HOLSTER | Holster - Cordura - TAC Series Lights    | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount                 | 80451 6     |
| NS-HSR1     | Heavy-Duty Dual Flashlight Strap         | 80441 7     |
| 200-FILTER  | TAC Light Filter Set - Red Green Blue    | 80498 1     |
| 9810-LH     | Holster - Basket Weave Leather           | 98101 9     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure  
switch



Side-switch



CR-123 batteries



Holster

# Tactical - Polymer

## Tactical Flashlights Rechargeable



*These compact rechargeable polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



Flashlight



# 200 Lumens

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



**TAC-400B**



**TAC-400T**

**TAC-400Y**

TAC-400B

TAC-400T

TAC-400Y



# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Weapon mountable (400B-RPS required)



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

| Model       | Description                  | UPC 0 17398 |
|-------------|------------------------------|-------------|
| TAC-400B    | Polymer Tactical Flashlight  | 80126 3     |
| TAC-400T    | Polymer Tactical Flashlight  | 80127 0     |
| TAC-400Y    | Polymer Tactical Flashlight  | 80128 7     |
| TAC-400BDC  | No AC power supply           | 80250 5     |
| TAC-400BLB  | Light & battery only         | 80183 6     |
| TAC-400TDC  | No AC power supply           | 80251 2     |
| TAC-400TLB  | Light & battery only         | 80184 3     |
| TAC-400YDC  | No AC power supply           | 80252 9     |
| TAC-400YLB  | Light & battery only         | 80185 0     |
| 200-RCONE   | Red safety cone              | 80131 7     |
| 200-YCONE   | Yellow safety cone           | 80132 4     |
| 400B-RPS    | Remote pressure switch       | 80130 0     |
| 400B-SS     | Side switch                  | 80141 6     |
| 400-BATT    | Rechargeable Li-ion battery  | 80144 7     |
| 9914-DW     | Direct wire kit              | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries      | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount     | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set         | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip          | 80461 5     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure switch




Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster



## Tactical - Xtreme Lumens™ - Polymer

# Xtreme Lumens™ Tactical Flashlight Rechargeable



*This compact rechargeable polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



Flashlight



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-410XL**


TAC-410XL



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000+ hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Weapon mountable (400B-RPS required)



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| TAC-410XL   | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black | 80418 9     |
| TAC-410XLCD | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black          | 80430 1     |
| TAC-410XLLB | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black   | 80431 8     |
| 200-RCONE   | Red safety cone  | 80131 7     |
| 200-YCONE   | Yellow safety cone   | 80132 4     |
| 400B-RPS    | Remote pressure switch   | 80130 0     |
| 400B-SS     | Side switch  | 80141 6     |
| 560-BATT    | Rechargeable Li-ion battery  | 80518 6     |
| 9914-DW     | Direct wire kit  | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)  | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount   | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set   | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather   | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip  | 80461 5     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure switch



Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

## Tactical - Metal

# Tactical Flashlight Rechargeable



*This compact rechargeable metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



Flashlight



# 200 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-450B**


TAC-450B



# Tactical - Metal

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

| Model       | Description                  | UPC 0 17398 |
|-------------|------------------------------|-------------|
| TAC-450B    | Metal Tactical Flashlight    | 80243 7     |
| TAC-450BDC  | No AC power supply           | 80254 3     |
| TAC-450BLB  | Light & battery only         | 80253 6     |
| 200-RCONE   | Red safety cone              | 80131 7     |
| 200-YCONE   | Yellow safety cone           | 80132 4     |
| 400B-RPS    | Remote pressure switch       | 80130 0     |
| 400B-SS     | Side switch                  | 80141 6     |
| 400-BATT    | Rechargeable Li-ion battery  | 80144 7     |
| 9914-DW     | Direct wire kit              | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries      | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount     | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set         | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip          | 80461 5     |



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure  
switch



Side-switch



Spare Lithium-ion  
rechargeable battery



Direct wire kit



Holster



## Tactical - Xtreme Lumens™ - Metal

# Xtreme Lumens™ Tactical Flashlight Rechargeable



*This compact rechargeable metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 230 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



Flashlight



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 230 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**TAC-460XL**


TAC-460XL





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier

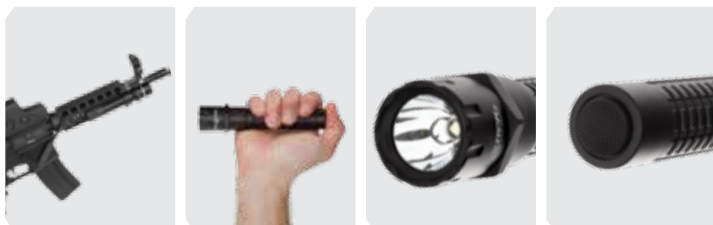

Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| TAC-460XL   | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black | 80418 9     |
| TAC-460XLDL | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black          | 80430 1     |
| TAC-460XLLB | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black   | 80431 8     |
| 200-RNONE   | Red safety cone  | 80131 7     |
| 200-YNONE   | Yellow safety cone   | 80132 4     |
| 400B-RPS    | Remote pressure switch   | 80130 0     |
| 400B-SS     | Side switch  | 80141 6     |
| 560-BATT    | Rechargeable Li-ion battery  | 80518 6     |
| 9914-DW     | Direct wire kit  | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)  | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount   | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set   | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather   | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip  | 80461 5     |



# Tactical - Polymer

## Tactical Flashlights Rechargeable - Multi-Function



These compact rechargeable multi-function polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).



**TAC-500B**

**200 Lumens**

- 3 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



**TAC-500T**

**TAC-500Y**

TAC-500B

TAC-500T

TAC-500Y



# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                 |
|---------------|----------------------|----------------------|---------------------|
|               | <b>200</b><br>LUMENS | <b>125</b><br>LUMENS | <b>65</b><br>LUMENS |
|               | <b>3h</b>            | <b>6h</b>            | <b>12h</b>          |
|               | <b>210m</b>          | <b>150m</b>          | <b>95m</b>          |
|               | <b>12000cd</b>       | <b>4951cd</b>        | <b>2250cd</b>       |
|               | <b>2m</b>            |                      |                     |
|               | <b>1m</b>            |                      |                     |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

| Model       | Description                  | UPC 0 17398 |
|-------------|------------------------------|-------------|
| TAC-500B    | Polymer Tactical Flashlight  | 80244 4     |
| TAC-500T    | Polymer Tactical Flashlight  | 80245 1     |
| TAC-500Y    | Polymer Tactical Flashlight  | 80246 8     |
| TAC-500BDC  | No AC power supply           | 80256 7     |
| TAC-500BLB  | Light & battery only         | 80255 0     |
| TAC-500TDC  | No AC power supply           | 80258 1     |
| TAC-500TLB  | Light & battery only         | 80257 4     |
| TAC-500YDC  | No AC power supply           | 80260 4     |
| TAC-500YLB  | Light & battery only         | 80259 8     |
| 200-RCONE   | Red safety cone              | 80131 7     |
| 200-YCONE   | Yellow safety cone           | 80132 4     |
| 400B-RPS    | Remote pressure switch       | 80130 0     |
| 400B-SS     | Side switch                  | 80141 6     |
| 400-BATT    | Rechargeable Li-ion battery  | 80144 7     |
| 9914-DW     | Direct wire kit              | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries      | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount     | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set         | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip          | 80461 5     |



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones




Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Polymer**

# Xtreme Lumens™ Tactical Flashlight

## Rechargeable - Multi-Function



This compact rechargeable multi-function polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-510XL**


TAC-510XL



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                  |
|---------------|----------------------|----------------------|----------------------|
|               | <b>800</b><br>LUMENS | <b>350</b><br>LUMENS | <b>140</b><br>LUMENS |
|               | <b>2h</b>            | <b>3h 45min</b>      | <b>8hr 45min</b>     |
|               | <b>205m</b>          | <b>157m</b>          | <b>99m</b>           |
|               | <b>10765cd</b>       | <b>6182cd</b>        | <b>2460cd</b>        |



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| TAC-510XL   | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black | 80419 6     |
| TAC-510XLDL | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black          | 80432 5     |
| TAC-510XLLB | Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black   | 80433 2     |
| 200-RCONE   | Red safety cone  | 80131 7     |
| 200-YCONE   | Yellow safety cone   | 80132 4     |
| 400B-RPS    | Remote pressure switch   | 80130 0     |
| 400B-SS     | Side switch  | 80141 6     |
| 560-BATT    | Rechargeable Li-ion battery  | 80518 6     |
| 9914-DW     | Direct wire kit  | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)  | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount   | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set   | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather   | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip  | 80461 5     |



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Metal**

# Xtreme Lumens™ Tactical Flashlight

## Multi-Function



This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a pair of CR-123 batteries (included) installed into the CR-123 Battery Carrier (included). The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. This light can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords.



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to be a rechargeable light


**TAC-540XL**

TAC-540XL



# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch


## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-1.5 hrs, medium-2 hrs, low-4.5 hrs, strobe-2.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

| FL1 STANDARD | HIGH                 | MEDIUM               | LOW                  |
|--------------|----------------------|----------------------|----------------------|
|              | <b>800</b><br>LUMENS | <b>350</b><br>LUMENS | <b>140</b><br>LUMENS |
|              | <b>1h 30min</b>      | <b>2h</b>            | <b>4h 30min</b>      |
|              | <b>205m</b>          | <b>157m</b>          | <b>99m</b>           |
|              | <b>10765cd</b>       | <b>6182cd</b>        | <b>2460cd</b>        |
|              | <b>2m</b>            |                      |                      |
|              | <b>1m</b>            |                      |                      |

## INCLUDED

- Flashlight
- CR-123 back-up battery carrier
- 2 - CR-123 Lithium batteries



## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| TAC-540XL   | Non-rechargeable battery included metal Xtreme Lumens tactical flashlight with CR-123 Battery Carrier and two CR-123 Lithium batteries - Black | 80366 3     |
| 560-BATT    | Rechargeable Li-ion battery  | 805186      |
| 400-CHGR1   | Charger for TAC-400 & TAC-500 series flashlights   | 80142 3     |
| 9914-ACCORD | AC power supply cord   | 81046 3     |
| 9914-DCCORD | DC power supply cord - temporary charging from a vehicle cigarette lighter/DC outlet   | 81047 0     |
| 200-RCONE   | Red safety cone  | 80131 7     |
| 200-YCONE   | Yellow safety cone   | 80132 4     |
| 9914-DW     | Vehicle direct wire kit - for use with optional 400-CHGR1  | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)  | 80112 6     |



DC power supply cord



AC power supply cord



Charger



Safety cones



Lithium-ion rechargeable battery



Direct wire kit

## Tactical - Metal

# Tactical Flashlight

## Rechargeable - Multi-Function



*This compact rechargeable multi-function metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



# 200 Lumens

- **3 Hours run-time**
- **Momentary or constant-on with 3 brightness levels & strobe**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-550B**


TAC-550B





# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                 |
|---------------|----------------------|----------------------|---------------------|
|               | <b>200</b><br>LUMENS | <b>125</b><br>LUMENS | <b>65</b><br>LUMENS |
|               | <b>3h</b>            | <b>6h</b>            | <b>12h</b>          |
|               | <b>210m</b>          | <b>150m</b>          | <b>95m</b>          |
|               | <b>12000cd</b>       | <b>4951cd</b>        | <b>2250cd</b>       |



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

| Model       | Description                  | UPC 0 17398 |
|-------------|------------------------------|-------------|
| TAC-550B    | Metal Tactical Flashlight    | 80247 5     |
| TAC-550BDC  | No AC power supply           | 80262 8     |
| TAC-550BLB  | Light & battery only         | 80261 1     |
| 200-RCONC   | Red safety cone              | 80131 7     |
| 200-YCONC   | Yellow safety cone           | 80132 4     |
| 400B-RPS    | Remote pressure switch       | 80130 0     |
| 400B-SS     | Side switch                  | 80141 6     |
| 400-BATT    | Rechargeable Li-ion battery  | 80144 7     |
| 9914-DW     | Direct wire kit              | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries      | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount     | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set         | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip          | 80461 5     |



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster



**Tactical - Xtreme Lumens™ - Metal**

**Xtreme Lumens™ Tactical Flashlight**  
**Rechargeable - Multi-Function**



*This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*

- High 
- Medium 
- Low 
- Strobe 



**800 Lumens**

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**TAC-560XL**



TAC-560XL



# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

| FL1 STANDARD | HIGH                 | MEDIUM               | LOW                  |
|--------------|----------------------|----------------------|----------------------|
|              | <b>800</b><br>LUMENS | <b>350</b><br>LUMENS | <b>140</b><br>LUMENS |
|              | <b>2h</b>            | <b>3h 45min</b>      | <b>8h 45min</b>      |
|              | <b>205m</b>          | <b>157m</b>          | <b>99m</b>           |
|              | <b>10765cd</b>       | <b>6182cd</b>        | <b>2460cd</b>        |




## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| TAC-560XL   | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black | 80367 0     |
| TAC-560XLDC | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black          | 80400 4     |
| TAC-560XLLB | Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black   | 80401 1     |
| 200-RCONE   | Red safety cone  | 80131 7     |
| 200-YCONE   | Yellow safety cone   | 80132 4     |
| 400B-RPS    | Remote pressure switch   | 80130 0     |
| 400B-SS     | Side switch  | 80141 6     |
| 560-BATT    | Rechargeable Li-ion battery  | 80518 6     |
| 9914-DW     | Direct wire kit  | 80044 0     |
| CR-123-10   | CR-123 Li-ion batteries (10 pack)  | 80112 6     |
| 200-HOLSTER | Holster-Cordura-TAC Lights   | 80233 8     |
| 300-HOLSTER | Holster-Cordura-TAC Lights   | 80454 7     |
| NS-HMC1     | Multi-Angle Helmet Mount   | 80451 6     |
| NS-HSR1     | Heavy-Duty Flashlight Strap  | 80441 7     |
| 200-FILTER  | TAC Light Filter Set   | 80498 1     |
| 9810-LH     | Holster-Basket Weave Leather   | 98101 9     |
| NS-PC1      | Snap-on Pocket Clip  | 80461 5     |



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster



## Tactical Dual-Light Flashlight

### Tactical Dual-Light™ Flashlight Multi-Function



The NSP-9842XL Xtreme Lumens™ Multi-Function Tactical Dual-Light Flashlight uses a CREE® LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 280 meters. A 200 lumen unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The NSP-9842XL has a unique tail-switch that operates both the flashlight and floodlight in one configuration. The upper portion of the switch operates the flashlight that provides both momentary or constant-on functionality with high, medium or low-brightness settings as well as a disorienting strobe and the lower portion of the switch operates a downward facing floodlight. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum with a Type III hard-anodized finish. Power comes from 2 CR-123 batteries.



**650** Flashlight Lumens  
**200** Floodlight Lumens  
**400** Dual-Light Lumens

- Xtreme Lumens™ design
- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on, 3 brightness levels & strobe
- Beam distance rated at 280 meters
- Powered by 2 CR-123 batteries

NSP-9842XL



# Tactical Dual-Light Flashlight



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Dual-function tail-switch
- 1" Handle diameter
- IP-X7 rated waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 CR-123 Lithium batteries
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*

## INCLUDED

- Flashlight
- CR-123 battery carrier
- 2 CR-123 batteries



## SPECIFICATIONS

- Flashlight lumens: high-650, medium-250, low-150
- Flashlight run-time: high-1.5hrs, medium-4hrs, low-6.5hrs
- Floodlight lumens: 200
- Floodlight run-time: 3hrs
- Dual-Light lumens: 400
- Dual-Light run-time: 2.5 hrs
- Candela: 19,112
- Recharge time: 4 hours (typical)
- Beam distance: 280 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in, head diameter: 1.5in, handle diameter: 1.1in, weight: 7.5oz

| FL1 STANDARD | HIGH       | MEDIUM     | LOW        |
|--------------|------------|------------|------------|
|              | 650 LUMENS | 250 LUMENS | 150 LUMENS |
|              | 1h 30min   | 4h         | 6h 30min   |
|              | 280m       | 217m       | 79m        |
|              | 19112cd    | 11733cd    | 1571cd     |
|              | 2m         |            |            |
|              | 1m         |            |            |

## MODELS/ACCESSORIES

| Model        | Description  | UPC 0 17398 |
|--------------|--|-------------|
| NSP-9842XL   | Tactical Dual-Light Flashlight with battery carrier and 2 CR-123 batteries | 80488 2     |
| 9844-BATT    | Replacement Lithium-ion battery  | 80          |
| 9600-USB     | USB cord - 27in  | 80227 7     |
| 9800-RCONE   | Red cone   | 80527 8     |
| 9800-YCONE   | Yellow cone  | 80528 5     |
| 9800-BCONE   | Blue cone  | 80526 1     |
| 9844-CHGR1   | Charger  | 80          |
| 9842-CARRIER | Back-up CR-123 battery carrier   | 80          |





## Tactical Dual-Light Flashlight

### Tactical Dual-Light™ Flashlight Rechargeable - Multi-Function



The NSR-9844XL Rechargeable Xtreme Lumens™ Multi-Function Tactical Dual-Light Flashlight uses a CREE® LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 280 meters. A 200 lumen unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The NSR-9844XL has a unique tail-switch that operates both the flashlight and floodlight in one configuration. The upper portion of the switch operates the flashlight that provides both momentary or constant-on functionality with high, medium or low-brightness settings as well as a disorienting strobe and the lower portion of the switch operates a downward facing floodlight. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum with a Type III hard-anodized finish. Power comes from a rechargeable Lithium-ion battery.



**650** Flashlight Lumens  
**200** Floodlight Lumens  
**400** Dual-Light Lumens

- Xtreme Lumens™ design
- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on, 3 brightness levels & strobe
- Beam distance rated at 280 meters
- Powered by rechargeable Lithium-ion battery

**NSR-9844XL**



# Tactical Dual-Light Flashlight



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Dual-function tail-switch
- 1" Handle diameter
- IP-X7 rated waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion Battery
- Back-up CR-123 battery carrier
- Wall/vehicle mountable charger
- AC Power Supply
- 12 V DC Power Supply



## SPECIFICATIONS

- Flashlight lumens: high-650, medium-250, low-150
- Flashlight run-time: high-1.5hrs, medium-4hrs, low-6.5hrs
- Floodlight lumens: 200
- Floodlight run-time: 3hrs
- Dual-Light lumens: 400
- Dual-Light run-time: 2.5 hrs
- Candela: 19,112
- Recharge time: 4 hours (typical)
- Beam distance: 280 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in, head diameter: 1.5in, handle diameter: 1.1in, weight: 8oz

| FL 1 STANDARD | HIGH       | MEDIUM     | LOW        |
|---------------|------------|------------|------------|
|               | 650 LUMENS | 250 LUMENS | 150 LUMENS |
|               | 1h 30min   | 4h         | 6h 30min   |
|               | 280m       | 217m       | 79m        |
|               | 19112cd    | 11733cd    | 1571cd     |
|               | 2m         |            | 1m         |

## MODELS/ACCESSORIES

| Model        | Description  | UPC 0 17398 |
|--------------|--|-------------|
| NSR-9844XL   | Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords | 80489 9     |
| NSR-9844XLDC | Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord         | 80529 2     |
| NSR-9844XLLB | Rechargeable Tactical Dual-Light Flashlight with battery   | 80530 8     |
| 9844-BATT    | Replacement Lithium-ion battery  | 80          |
| 9600-USB     | USB cord - 27in  | 80227 7     |
| 9800-RCONE   | Red cone   | 80527 8     |
| 9800-YCONE   | Yellow cone  | 80528 5     |
| 9800-BCONE   | Blue cone  | 80526 1     |
| 9844-CHGR1   | Charger  | 80          |



## Area Lights - Rechargeable

# LED Area Light with Magnetic Base Rechargeable

Flood High



Flood Low



The NSR-1514 Rechargeable LED Area Light with Magnetic Base is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light includes an adjustable handle, and AC and DC power supplies.

# 1000 Floodlight Lumens


**NSR-1514**


- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel design with magnetic base
- Rechargeable Li-ion
- Includes AC and DC power supplies



# Area Lights - Rechargeable

## FEATURES: ALL MODELS

- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel fixture design
- Powerful magnetic base for hands-free operation
- Multi-fin heat sink keeps light cool to the touch
- LED is rated at 50,000 hours of life
- Adjustable comfort-grip handle
- Single sealed push button switch
- Tempered glass lens
- Powder coated for long wear
- IP-X7 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC and DC power supplies
- 1 Year Limited warranty\*

## SPECIFICATIONS

- High Floodlight Lumens – 1000
- Low Floodlight Lumens – 500
- High Floodlight Run-time – 4hrs
- Low Floodlight Run-time – 8hrs
- Water Rating – IP-X7 waterproof
- Drop Rating – 2m
- Length: 6.1in (155mm), width: 3.5in (89mm), height: 12in (305mm) weight: 52.8oz (1496g)

## INCLUDED

- Area Light
- Adjustable handle
- AC/DC power supplies



Magnetic Base



Hanging Handle



Charging Port



Area Light, AC/DC Power Supplies

| Model    | UPC 0 17398 |
|----------|-------------|
| NSR-1514 | 80544 5     |



## Area Lights - Rechargeable

### LED Area Light Kit Rechargeable

Flood High



Flood Low



# 1000 Floodlight Lumens



- High/Low brightness modes
- Constructed from 6061-T6 aluminum
- Multi-angle tilt and swivel design w/ magnetic base
- Rechargeable Li-ion
- Includes 6' tripod, AC and DC power supplies and carrying case

The NSR-1514C Rechargeable LED Area Light Kit is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light kit includes an adjustable handle, a 6' tripod with camlock adjusters, and AC and DC power supplies all placed inside a durable carrying case.


**NSR-1514C**

# Area Lights - Rechargeable

## FEATURES: ALL MODELS

- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel fixture design
- Powerful magnetic base for hands-free operation
- 6' tripod with camlock adjusters
- Placed inside a durable carrying case
- Multi-fin heat sink keeps light cool to the touch
- LED is rated at 50,000 hours of life
- Adjustable comfort-grip handle
- Single sealed push button switch
- Tempered glass lens
- Powder coated for long wear
- IP-X7 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC and DC power supplies
- 1 Year Limited warranty\*

## SPECIFICATIONS

- High Floodlight Lumens – 1000
- Low Floodlight Lumens – 500
- High Floodlight Run-time – 4hrs
- Low Floodlight Run-time – 8hrs
- Water Rating – IP-X7 waterproof
- Drop Rating – 2m
- Length: 32in (813mm), width: 5in (127mm), height: 16in (406mm) weight: 288oz (3629g)

## INCLUDED

- Area Light
- Adjustable handle
- 6' tripod
- AC/DC power supplies
- Carrying case



Area Light with Magnetic Base



Tripod Base



Camlock Adjusters



AC/DC Power Supplies



Area Light and Tripod in Carrying Case

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSR-1514C | 80560 5     |



## Long Gun Light Kits

### Tactical Long Gun Light Kit



The Nightstick Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-300B polymer tactical light rated at 180 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-300B is distance rated at 190 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-300B is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-300B becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



# 180 Lumens

- 190 Meter beam distance
- 3 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-300B-K01**


TAC-300B-K01



# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

| Model        | UPC 0 17398 |
|--------------|-------------|
| TAC-300B-K01 | 80368 7     |

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-300B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries



## Long Gun Light Kits

# Varmint Hunter Green LED Light Kit



The Nightstick Varmint Hunter Green LED Light Kit provides everything necessary to add a high-power Green LED light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-302B polymer Green LED light rated at 150 lumens. Combined with a high-efficiency deep parabolic reflector, the beam is distance rated at 180 meters...perfect for long-distance target acquisitions. When paired with the included Remote Pressure Switch, the TAC-302B becomes the perfect addition to any varmint hunter's weapon. With its momentary on/off design, the Remote Pressure Switch assures the hunter of complete control over the full power of the light.

Flashlight



# 150 Lumens

- 180 Meter beam distance
- 3.5 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-302B-K01**

TAC-302B-K01



# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

|              |                    |
|--------------|--------------------|
| <b>Model</b> | <b>UPC 0 17398</b> |
| TAC-302B-K01 | 80429 5            |

## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-302B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries





## Long Gun Light Kits

# Tactical Long Gun Light Kit

## Upgradable to Rechargeable



The Nightstick Xtreme Lumens™ Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-460XL tactical light rated at 800 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-460XL is distance rated at 205 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-460XL is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-460XL becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



# 800 Lumens

- 2 Hours run-time
- Remote pressure switch with momentary on/off control
- Beam distance rated at 205 meters
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail



TAC-460XL-K01

TAC-460XL-K01





# Long Gun Light Kits




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Serialized for personal identification
- Includes momentary or constant-on tail switch so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included) using the included CR-123 Battery Carrier
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 7.6oz (with RPS)



## INCLUDED

- TAC-460XL flashlight
- Standard tail-switch
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- CR-123 back-up battery carrier
- Two CR-123 Lithium batteries



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch



|               |                    |
|---------------|--------------------|
| <b>Model</b>  | <b>UPC 0 17398</b> |
| TAC-460XL-K01 | 80420 2            |

## Helmet Light Kits and Mounts

### Heavy-Duty Dual Flashlight Strap

- **Universal design fits virtually any helmet or hardhat**
- **High temperature rated at over 500°F**
- **Constructed from thick-walled black silicone rubber**

*The Heavy-Duty Dual Flashlight Strap is a universal design that will fit virtually any Fire Helmet or Hard Hat. The dual holes located on each side of the strap allow the user to position any flashlight or object up to 1.25" in diameter in either hole or even both holes at the same time. Constructed from thick-walled black silicone rubber, the chemical resistant and waterproof NS-HSR1 is designed to stay in place even in wet conditions. The NS-HSR1 meets requirements of NFPA-1971-8.6 (2013).*



**NS-HSR1**



(Helmet and light not included)

NS-HSR1



# Helmet Light Kits and Mounts

## FEATURES


- Universal design fits virtually any helmet or hardhat
- High temperature rated at over 500°F
- Constructed from thick-walled black silicone rubber
- Dual holes on each side allow for right, left or both side placement of light
- Will hold any flashlight or object up to 1.25" in diameter
- Stays in place even in wet conditions
- Chemical resistant
- Waterproof
- Meets the requirements of NFPA-1971-8.6 (2013)
- Fits helmets with circumference: 24in - 34in
- Material temperature rating: -67°F – 572°F
- Length: 12in, Width: 1.875in
- Wall thickness: .125in, Hole diameter: 1.1875in, Hole spacing: 2.5in, Weight: 3.4oz
- Limited 1 Year Warranty \*\*



Heavy-Duty Silicone Rubber



Dual hole design

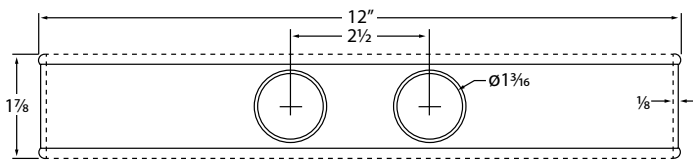

| Model   | UPC 0 17398 |
|---------|-------------|
| NS-HSR1 | 80441 7     |



Fits any light up to 1.25" in diameter

## Helmet Light Kits and Mounts

### Multi-Angle Helmet Mount



The Multi-Angle Helmet Mount is a mounting bracket for attaching a flashlight that has a 1" handle diameter to the brim of virtually any Fire Helmet or Hard Hat. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The NS-HMC1 meets the requirements of NFPA-1971-8.6 (2013).



- Works with virtually all fire helmets and hard hats
- Fits any flashlight with a 1" handle diameter
- 140 Degrees of adjustability
- Meets the requirements of NFPA-1971-8.6 (2013)

**NS-HMC1**



NS-HMC1



# Helmet Light Kits and Mounts

## FEATURES

- Works with virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Fits any Nightstick TAC light or any flashlight with a 1" handle diameter
- Cast from ADC12 aluminum alloy
- Meets the requirements of NFPA-1971-8.6 (2013)
- Includes mount, light mounting allen set screw, 2 different length brim mounting allen set screws, and allen wrench
- Length: 3.1in, Width: 1.3in, Height: 0.9in, Weight: 1.7oz
- Limited Lifetime Warranty\*

## INCLUDED

- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench



Multi-angle helmet mount



Cast from ADC12 aluminum alloy



Fits virtually all hard hats




| Model   | UPC 0 17398 |
|---------|-------------|
| NS-HMC1 | 80451 6     |

# Helmet Light Kits and Mounts

## Tactical Fire Light With Multi-Angle Helmet Mount



Flashlight


 140°  
Rotation

The Tactical Fire Light w/ Multi-Angle Helmet Mount is a complete system for attaching the Tactical Fire Light to any Fire Helmet or Hard Hat. The Tactical Fire Light is rated at 180 Lumens and has a tight long-throw beam that is distance rated at 190 meters. The entire system is IP-X7 waterproof and is drop rated at 2 meters. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The FDL-300R-K01 meets the requirements of NFPA-1971-8.6 (2013).



# 180 Lumens

- 180 Lumens
- 3 Hours run-time
- Momentary or constant-on
- Can be mounted to virtually all fire helmets and hard hats
- 140 Degrees of adjustability
- Meets the requirements of NFPA-1971-8.6 (2013)

**FDL-300R-K01**


FDL-300R-K01



# Helmet Light Kits and Mounts

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Large textured tail-switch
- Will fit on virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Glass-filled nylon polymer flashlight housing
- Mount is cast from ADC12 aluminum alloy
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch




Multi-angle helmet mount



## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz



## INCLUDED


- FDL-300R flashlight
- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench
- Two CR-123 Lithium batteries



| Model        | UPC 0 17398 |
|--------------|-------------|
| FDL-300R-K01 | 80368 7     |

# Helmet Light Kits and Mounts

## Helmet-Mounted Multi-Function Dual-Light™ Flashlight

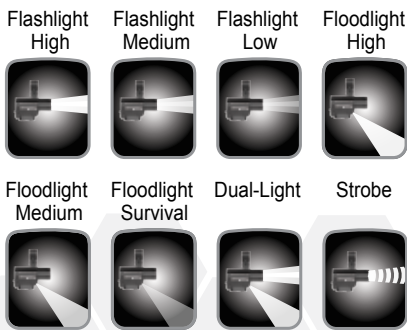

**220** Flashlight Lumens

**100** Floodlight Lumens

**175** Dual-Light™ Lumens

- User-selectable brightness on Flashlight & Floodlight including 15 Lumen Survival mode on Floodlight
- Works with virtually all fire helmets and hard hats
- Meets the requirements for NFPA-1971-8.6 (2013)



The NSP-4650B Helmet-mounted Multi-Function Dual-Light™ Flashlight is the most versatile choice for helmet-mounted hands-free lighting. The 4650 outshines the competition with its powerful 220 lumen tightly-focused flashlight and a beam distance rating of 183 meters (600 feet). The user can choose from two additional lower lumen settings at 100 or 30 lumens for the ability to dial-in just the right amount of concentrated light. Located just below the flashlight angled at 45 degrees, is a user-selectable brightness floodlight with 100 or 50 lumens for typical use, as well as a "Survival" mode at 15 lumens for emergency situations.



**NSP-4650B**

NSP-4650B






# Helmet Light Kits and Mounts

## FEATURES

- Flashlight – Floodlight – Dual-Light™
- CREE® LED technology – 50,000+ hours LED life
- User-selectable brightness on Flashlight & Floodlight including 15 Lumen Survival mode on Floodlight
- Works with virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to select exact angle and position for optimum light alignment and clearance of face shields, goggles or other equipment
- Rear-facing Green Safety LED
- Cast from ADC12 aluminum alloy
- Waterproof
- Impact & chemical resistant
- Meets the requirements for NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 – CR-123 batteries (included)
- Limited Lifetime Warranty\*

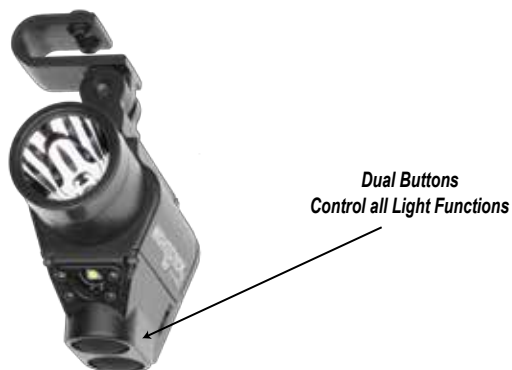

## SPECIFICATIONS

- Lumens: flashlight high: 220, medium: 100, low: 30, strobe: 175, floodlight high: 100, medium: 50, survival: 15, dual-light: 175
- Run-time: flashlight high: 3hr 30min, medium: 10hr, low: 33hr 30min, strobe: 6hr, floodlight high: 10hr, medium: 21hr 30min, survival: 60hr
- Beam distance: 183 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 3.23in, width: 1.42in, bezel diameter: 1.14in, weight: 6.5oz

| FL 1 STANDARD | HIGH       | MEDIUM     | LOW       |
|---------------|------------|------------|-----------|
|               | 220 LUMENS | 100 LUMENS | 30 LUMENS |
|               | 3h 30min   | 10h        | 33h       |
|               | 183m       | 120m       | 59m       |
|               | 8073cd     | 3669cd     | 861cd     |
|               | 2m<br>1m   |            |           |



## INCLUDED

- Light
- Two different length brim mounting Allen set screws
- Allen wrench
- 2 – CR-123 Lithium batteries



| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-4650B | 80471 4     |



## Duty/Personal-Size - Polymer

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



These rechargeable polymer multi-function duty/personal-size flashlights use a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 325 meters. The body & tail-cap switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.


**NSR-9514XL**


# 650 Lumens

- **6.5 Hours run-time**
- **Momentary or constant-on with 3 brightness levels & strobe**
- **Beam distance rated at 325 meters**
- **Glass-filled nylon polymer housing**
- **Powered by Lithium-ion rechargeable battery**



NSR-9514XL



# Duty/Personal-Size - Polymer

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap & 316 stainless steel bezel, both with Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: high-650, medium-200, low-50, strobe-300
- Run-time: high-6.5 hrs, medium-9 hrs, low-12 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 325 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.1oz

| FL 1 STANDARD | HIGH              | MEDIUM            | LOW              |
|---------------|-------------------|-------------------|------------------|
|               | <b>650 LUMENS</b> | <b>200 LUMENS</b> | <b>50 LUMENS</b> |
|               | <b>6h 30 min</b>  | <b>9h</b>         | <b>12h</b>       |
|               | <b>325m</b>       | <b>235m</b>       | <b>118m</b>      |
|               | <b>23976cd</b>    | <b>12075cd</b>    | <b>6200cd</b>    |
|               | <b>2m</b>         |                   |                  |
|               | <b>1m</b>         |                   |                  |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description   | UPC 0 17398 |
|--------------|---|-------------|
| NSR-9514XL   | Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring | 80304 5     |
| NSR-9514XLD  | Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring         | 80307 6     |
| NSR-9514XLLB | Rechargeable dual switch black polymer flashlight with battery and anti-roll ring   | 80310 6     |
| 9600-BATT    | Replacement Lithium-ion battery   | 80222 2     |
| 9600-USB     | USB cord – 27in   | 80227 7     |
| 9600-RCONE   | Red cone  | 80226 0     |
| 9600-YCONE   | Yellow cone   | 80228 4     |
| 9600-BCONE   | Blue cone   | 80223 9     |
| 9000-CHGR5   | 5 bank charger  | 80475 2     |
| 9810-LH      | Leather holster   | 98101 9     |
| 9914-DW      | Direct wire kit   | 80044 0     |



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

## Duty/Personal-Size - Polymer

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



These rechargeable polymer multi-function duty/personal-size flashlights use a CREE® LED rated at 350 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 313 meters. The body & tail-cap switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.


**NSR-9514Y**

# 350 Lumens

- 4.25 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 313 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



NSR-9514Y



# Duty/Personal-Size - Polymer

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap & 316 stainless steel bezel, both with Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



## SPECIFICATIONS

- Lumens: high-350, medium-200, low-55, strobe-300
- Run-time: high-4.25 hrs, medium-8.5 hrs, low-32.5 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 313 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.1oz

| FL1 STANDARD | HIGH                 | MEDIUM               | LOW                 |
|--------------|----------------------|----------------------|---------------------|
|              | <b>350</b><br>LUMENS | <b>200</b><br>LUMENS | <b>55</b><br>LUMENS |
|              | <b>4h 15min</b>      | <b>8h 30min</b>      | <b>32h 30min</b>    |
|              | <b>313m</b>          | <b>235m</b>          | <b>118m</b>         |
|              | <b>24100cd</b>       | <b>12075cd</b>       | <b>6200cd</b>       |
|              | <b>2m</b>            |                      |                     |
|              | <b>1m</b>            |                      |                     |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply

## MODELS/ACCESSORIES

| Model       | Description  | UPC 0 17398 |
|-------------|--|-------------|
| NSR-9514Y   | Rechargeable dual switch yellow polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring | 80474 5     |
| NSR-9514YDC | Rechargeable dual switch yellow polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring         | 80496 7     |
| NSR-9514YLB | Rechargeable dual switch yellow polymer flashlight with battery and anti-roll ring   | 80497 4     |
| 9600-BATT   | Replacement Lithium-ion battery  | 80222 2     |
| 9600-USB    | USB cord – 27in  | 80227 7     |
| 9600-RCONE  | Red cone   | 80226 0     |
| 9600-YCONE  | Yellow cone  | 80228 4     |
| 9600-BCONE  | Blue cone  | 80223 9     |
| 9000-CHGR5  | 5 bank charger   | 80475 2     |
| 9810-LH     | Leather holster  | 98101 9     |
| 9914-DW     | Direct wire kit  | 80044 0     |



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

## Duty/Personal-Size - Metal

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



*This rechargeable metal multi-function duty/personal-size flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 325 meters. The body & tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.*



# 650 Lumens

- 6.5 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 325 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

NSR-9614XL



NSR-9614XL



# Duty/Personal-Size - Metal

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing/tail-cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: high-650, medium-200, low-50, strobe-300
- Run-time: high-6.5hrs, medium-9 hrs, low-12 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 325 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 12.8oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                 |
|---------------|----------------------|----------------------|---------------------|
|               | <b>650</b><br>LUMENS | <b>200</b><br>LUMENS | <b>50</b><br>LUMENS |
|               | <b>6h 30 min</b>     | <b>9h</b>            | <b>12h</b>          |
|               | <b>325m</b>          | <b>235m</b>          | <b>118m</b>         |
|               | <b>23976cd</b>       | <b>12075cd</b>       | <b>6200cd</b>       |
|               | <b>2m</b>            |                      |                     |
|               | <b>1m</b>            |                      |                     |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description   | UPC 0 17398 |
|--------------|---|-------------|
| NSR-9614XL   | Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring/black | 80217 8     |
| NSR-9614XLDC | Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring/black         | 80231 4     |
| NSR-9614XLLB | Rechargeable dual switch metal flashlight with battery and anti-roll ring   | 80232 1     |
| 9600-BATT    | Replacement Lithium-ion battery   | 80222 2     |
| 9600-USB     | USB cord – 27in   | 80227 7     |
| 9600-RCONE   | Red cone  | 80226 0     |
| 9600-YCONE   | Yellow cone   | 80228 4     |
| 9600-BCONE   | Blue cone   | 80223 9     |
| 9000-CHGR5   | 5 bank charger  | 80475 2     |
| 9810-LH      | Leather holster   | 98101 9     |
| 9914-DW      | Direct wire kit   | 80044 0     |



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Polymer**

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum tail-cap and a 316 stainless steel bezel. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight Lumens

**200** Floodlight Lumens

**400** Dual-Light™ Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9920XL**

NSR-9920XL






# Duty/Personal-Size - Xtreme Lumens™ - Polymer



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail cap and 316 stainless steel bezel both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Hands-free tail cap magnet




## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.9oz

| FL 1 STANDARD | HIGH       | MEDIUM     | LOW        |
|---------------|------------|------------|------------|
|               | 650 LUMENS | 300 LUMENS | 150 LUMENS |
|               | 3h         | 6h         | 14h        |
|               | 275m       | 200m       | 146m       |
|               | 18675cd    | 9687cd     | 4857cd     |
|               | 2m         |            |            |
|               | 1m         |            |            |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description  | UPC 0 17398 |
|--------------|--|-------------|
| NSR-9920XL   | Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Red | 80388 5     |
| NSR-9920XLDC | Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Red         | 80389 2     |
| NSR-9920XLLB | Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with battery and anti-roll ring - Red   | 80390 8     |
| 9600-BATT    | Replacement Lithium-ion battery  | 80222 2     |
| 9600-USB     | USB cord - 27in  | 80227 7     |
| 9600-RCONE   | Red cone   | 80226 0     |
| 9600-YCONE   | Yellow cone  | 80228 4     |
| 9600-BCONE   | Blue cone  | 80223 9     |
| 9000-CHGR5   | 5 bank charger   | 80475 2     |
| 9914-DW      | Direct wire kit  | 80044 0     |



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Polymer**

# Duty/Personal-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum bezel and tail-cap. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**200** Floodlight  
Lumens

**400** Dual-Light™  
Lumens

NSR-9924XL

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)



NSR-9924XL



# Duty/Personal-Size - Xtreme Lumens™ - Polymer



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum bezel and tail-cap, both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch (tandem operation)
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch


## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 9.9oz

| FL 1 STANDARD | HIGH              | MEDIUM            | LOW               |
|---------------|-------------------|-------------------|-------------------|
|               | <b>650 LUMENS</b> | <b>300 LUMENS</b> | <b>150 LUMENS</b> |
|               | <b>3h</b>         | <b>6h</b>         | <b>14h</b>        |
|               | <b>275m</b>       | <b>200m</b>       | <b>146m</b>       |
|               | <b>18675cd</b>    | <b>9687cd</b>     | <b>4857cd</b>     |
|               | <b>2m</b>         |                   |                   |
|               | <b>1m</b>         |                   |                   |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description   | UPC 0 17398 |
|--------------|---|-------------|
| NSR-9924XL   | Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black | 80392 2     |
| NSR-9924XLDC | Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black         | 80393 9     |
| NSR-9924XLLB | Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with battery and anti-roll ring - Black   | 80394 6     |
| 9600-BATT    | Replacement Lithium-ion battery   | 80222 2     |
| 9600-USB     | USB cord - 27in   | 80227 7     |
| 9600-RCONE   | Red cone  | 80226 0     |
| 9600-YCONE   | Yellow cone   | 80228 4     |
| 9600-BCONE   | Blue cone   | 80223 9     |
| 9000-CHGR5   | 5 bank charger  | 80475 2     |
| 9914-DW      | Direct wire kit   | 80044 0     |



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Metal**

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The light is constructed from aircraft-grade 6061 T-6 aluminum and has a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight Lumens

**200** Floodlight Lumens

**400** Dual-Light™ Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9940XL**

NSR-9940XL



# Duty/Personal-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing, bezel and tail-cap
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

| FL 1 STANDARD | HIGH       | MEDIUM     | LOW        |
|---------------|------------|------------|------------|
|               | 650 LUMENS | 300 LUMENS | 150 LUMENS |
|               | 3h         | 6h         | 14h        |
|               | 275m       | 200m       | 146m       |
|               | 18675cd    | 9687cd     | 4857cd     |
|               | 2m         |            |            |
|               | 1m         |            |            |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



High-efficiency deep parabolic reflector

Hands-free tail cap magnet

Wide-beam floodlight

Dual-switch control

## MODELS/ACCESSORIES

| Model        | Description  | UPC 0 17398 |
|--------------|--|-------------|
| NSR-9940XL   | Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black | 80411 0     |
| NSR-9940XLDC | Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black         | 80412 7     |
| NSR-9940XLLB | Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with battery and anti-roll ring - Black   | 80413 4     |
| 9600-BATT    | Replacement Lithium-ion battery  | 80222 2     |
| 9600-USB     | USB cord - 27in  | 80227 7     |
| 9600-RCONE   | Red cone   | 80226 0     |
| 9600-YCONE   | Yellow cone  | 80228 4     |
| 9600-BCONE   | Blue cone  | 80223 9     |
| 9000-CHGR5   | 5 bank charger   | 80475 2     |
| 9914-DW      | Direct wire kit  | 80044 0     |



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit


**Duty/Personal-Size - Xtreme Lumens™ - Metal**

# Duty/Personal-Size Dual-Light™ Flashlight

## Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and the bezel is constructed from 316 stainless steel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**200** Floodlight  
Lumens

**400** Dual-Light™  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9944XL**

NSR-9944XL




# Duty/Personal-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch tandem operation
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

| FL 1 STANDARD | HIGH       | MEDIUM     | LOW        |
|---------------|------------|------------|------------|
|               | 650 LUMENS | 300 LUMENS | 150 LUMENS |
|               | 3h         | 6h         | 14h        |
|               | 275m       | 200m       | 146m       |
|               | 18675cd    | 9687cd     | 4857cd     |
|               |            |            |            |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description   | UPC 0   |
|--------------|---|---------|
| NSR-9944XL   | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black | 80395 3 |
| NSR-9944XLDC | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black         | 80396 0 |
| NSR-9944XLLB | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black   | 80397 7 |
| 9600-BATT    | Replacement Lithium-ion battery   | 80222 2 |
| 9600-USB     | USB cord - 27in   | 80227 7 |
| 9600-RCONE   | Red cone  | 80226 0 |
| 9600-YCONE   | Yellow cone   | 80228 4 |
| 9600-BCONE   | Blue cone   | 80223 9 |
| 9000-CHGR5   | 5 bank charger  | 80475 2 |
| 9914-DW      | Direct wire kit   | 80044 0 |



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Full-Size - Xtreme Lumens™ - Metal**

## Full-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function full-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and bezel is constructed from 316 stainless steel bezel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



**650** Flashlight  
Lumens

**200** Floodlight  
Lumens

**400** Dual-Light™  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9744XL**

NSR-9744XL





# Full-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - Body switch
- Floodlight - Second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Two body switches

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-6 hrs, medium-10.5 hrs, low-26 hrs, strobe-12.5 hrs, floodlight-10, dual-light-8.75
- Recharge time: 6 hours
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 11.8in, head diameter: 1.6in, handle diameter: 1.2in, weight: 17.5oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                  |
|---------------|----------------------|----------------------|----------------------|
|               | <b>650</b><br>LUMENS | <b>300</b><br>LUMENS | <b>150</b><br>LUMENS |
|               | <b>6h</b>            | <b>10.5h</b>         | <b>26h</b>           |
|               | <b>275m</b>          | <b>200m</b>          | <b>146m</b>          |
|               | <b>18675cd</b>       | <b>9687cd</b>        | <b>4857cd</b>        |
|               | <b>2m</b>            |                      |                      |
|               | <b>1m</b>            |                      |                      |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description   | UPC 0 17398 |
|--------------|---|-------------|
| NSR-9744XL   | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black | 80382 3     |
| NSR-9744XLDC | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black         | 80383 0     |
| NSR-9744XLLB | Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black   | 80384 7     |
| 9700-BATT    | Replacement Lithium-ion battery   | 80312 0     |
| 9600-USB     | USB cord - 27in   | 80227 7     |
| 9600-RCONE   | Red safety cone   | 80226 0     |
| 9600-YCONE   | Yellow safety cone  | 80228 4     |
| 9600-BCONE   | Blue safety cone  | 80223 9     |
| 9000-CHGR5   | 5 bank charger  | 80475 2     |
| 9914-DW      | Direct wire kit   | 80044 0     |



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable

**XTREME  
LUMENS™**
**Full-Size - Xtreme Lumens™ - Metal**

## Full-Size Flashlight

### Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function full-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 450 meters. The body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low brightness setting as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.



# 650 Lumens

- 4 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 450 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**NSR-9746XL**


NSR-9746XL



# Full-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, tail cap and bezel
- Type III hard anodized finish
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch

## SPECIFICATIONS

- Lumens: high-650, medium-390, low-100, strobe-650
- Run-time: high-4 hrs, medium-8 hrs, low-44 hrs, strobe-8 hrs
- Recharge time: 6 hours
- Beam distance: 450 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 12.8in, head diameter: 2.4in, handle diameter: 1.2in, weight: 22.5oz

| FL 1 STANDARD | HIGH                 | MEDIUM               | LOW                  |
|---------------|----------------------|----------------------|----------------------|
|               | <b>650</b><br>LUMENS | <b>390</b><br>LUMENS | <b>100</b><br>LUMENS |
|               | <b>4h</b>            | <b>8h</b>            | <b>44h</b>           |
|               | <b>450m</b>          | <b>295m</b>          | <b>70m</b>           |
|               | <b>64253cd</b>       | <b>25834cd</b>       | <b>1528cd</b>        |
|               | 2m<br>↓<br>1m        |                      |                      |

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- 12 V DC power supply



## MODELS/ACCESSORIES

| Model        | Description  | UPC 0 17398 |
|--------------|--|-------------|
| NSR-9746XL   | Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords/black | 80240 6     |
| NSR-9746XLDC | Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord/black         | 80316 8     |
| NSR-9746XLLB | Rechargeable single switch metal flashlight with battery   | 80317 5     |
| 9700-BATT    | Replacement Lithium-ion battery  | 80312 0     |
| 9600-USB     | USB cord - 27in  | 80227 7     |
| 9700-RCONE   | Red safety cone  | 80313 7     |
| 9700-YCONE   | Yellow safety cone   | 80314 4     |
| 9700-BCONE   | Blue safety cone   | 80315 1     |
| 9850-BRBW    | Basket weave leather belt ring   | 98501 7     |
| 9850-BRN     | Nylon belt ring  | 98502 4     |
| 9850-BRPL    | Patent leather belt ring   | 98503 1     |
| 9850-BRSL    | Standard leather belt ring   | 98504 8     |
| 9000-CHGR5   | 5 bank charger   | 80475 2     |
| 9914-DW      | Direct wire kit  | 80044 0     |



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Belt rings

# Multi-Purpose - Polymer

## Multi-Function Flashlights Flashlight-Floodlight-Dual-Light™

These non-rechargeable multi-function Dual-Light™ flashlights use a single body switch offering the user a choice of flashlight, floodlight or dual-light operation. The compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1224 models have an integrated body magnet for hands-free use. Power comes from 2 included AAA batteries (1206) and 4 included AAA batteries (1224).

Flashlight



Floodlight



Dual-Light



**65** Flashlight Lumens

**100** Floodlight Lumens

**125** Dual-Light™ Lumens

- 5 Hours run-time
- Integrated hands-free magnet (1224)
- Focused-beam flashlight
- Wide-area non-focused floodlight



**NSP-1224R**

**NSP-1224B**



**NSP-1206R**

**NSP-1206B**

NSP-1206B



NSP-1206R



NSP-1224B



NSP-1224R




# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Soft-touch grip
- Water resistant
- Non-slip grip
- Comfortable oval shape
- Impact & chemical resistant polymer housing
- Integrated body magnet (1224 only)
- Powered by 4 AAA batteries (1224) & 2 AAA batteries (1206) included
- Limited 1 Year Warranty \*




High-efficiency deep parabolic reflector (1224)

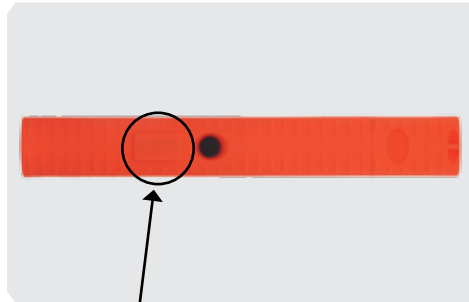

Integrated magnet with single switch control for flashlight floodlight and dual-light (1224)



Four bright LEDs (1206)

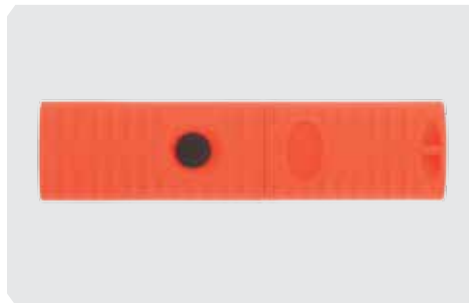


Single switch control for flashlight floodlight and dual-light (1206)

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-1206B | 80355 7     |
| NSP-1206R | 80356 4     |
| NSP-1224B | 80357 1     |
| NSP-1224R | 80358 8     |


## NSP-1206R-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1206B-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1224R-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## NSP-1224B-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## INCLUDED

- Flashlight
- 2 AAA batteries (1206) & 4 AAA batteries (1224)



## Multi-Purpose - Polymer

### Multi-Function Flashlight Flashlight-Floodlight-Dual-Light™

Flashlight



Flood High



Flood Low



Dual-Light



This non-rechargeable multi-function Dual-Light™ flashlight features a focused-beam flashlight for distance illumination and a non-focused floodlight for close-up lighting. With its dual-switch design, the user can select between flashlight as well as full-power or half-power floodlight. Additionally this light offers the ability to turn both the flashlight and the floodlight on at the same time for even greater functionality. A hands-free dual-angle stand, clip-on magnet and impact bumpers are included. Power comes from 4 included AA batteries.



TECHNOLOGY

**150** Flashlight  
Lumens

**120/60** Floodlight  
Lumens

**270** Dual-Light™  
Lumens

- Dual switch function
- Focused-beam flashlight
- Wide-area unfocused floodlight
- Dual-Light™ (flashlight and floodlight together)

**NSP-1260**




NSP-1260



# Multi-Purpose - Polymer

## FEATURES

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Focused beam flashlight
- Wide-beam unfocused floodlight
- Dual-Light (flashlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by four premium AA alkaline batteries (included)
- Limited 1 Year Warranty \*



Dual switch control with impact bumpers (included)



Clip-magnet (included)



High-efficiency deep parabolic reflector



Hands-free stand (included)

## SPECIFICATIONS

- Lumens: flashlight-150, full-power floodlight-120, half-power floodlight-60, dual-light-270
- Run-time: flashlight-10 hrs, full-power floodlight-4 hrs, half-power floodlight-10 hrs, dual-light-3 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, width: 1.3 x .9in, weight: 8.2oz

## INCLUDED

- 4 AA premium alkaline batteries
- Impact bumpers & clip-magnet
- Hands-free dual-angle stand



## MODELS ACCESSORIES

| Model        | Description         | UPC<br>0 17398 |
|--------------|---------------------|----------------|
| NSP-1260     | 61 LEDs             | 80030 3        |
| 1160-BASE    | Large magnetic base | 80026 6        |
| 1200-MAGNET  | Clip-on magnet      | 70004 7        |
| 1260-BUMPERS | Impact Bumpers      | 80135 5        |
| 1260-RCONE   | Red safety cone     | 80085 3        |
| 1260-YCONE   | Yellow safety cone  | 80086 0        |



Large  
Magnetic base



Clip-on  
magnet



Impact  
bumpers



Safety  
cones



# Multi-Purpose - Polymer

## Dual-Switch Dual-Light™ Flashlights Non-Rechargeable - Polymer

Flashlight



Floodlight



Dual-Light



These non-rechargeable dual-switch Dual-Light™ flashlights each have two body switches offering the user a choice of flashlight, floodlight or dual-light operation. Their compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1400B/R/T each have a white flashlight and a white floodlight. The 1402 has a white flashlight and a red floodlight, and the 1404 has a white flashlight and a green floodlight. All models include a removable pocket/belt clip. Power comes from 2 included AAA batteries.



**60** Flashlight Lumens

**25** Floodlight Lumens

**90** Dual-Light™ Lumens



- 3 Hours run-time
- Focused-beam flashlight
- Wide-area non-focused floodlight
- Floodlight color: White (1400), Red (1402) & Green (1404)



**NSP-1400B**

NSP-1400R



NSP-1400B



NSP-1400T



NSP-1402B



NSP-1404B



**NSP-1400R**

**NSP-1400T**

**NSP-1402B**

**NSP-1404B**



# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED
- Flashlight – floodlight – Dual-Light™
- Focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight (1402) and green floodlight (1404) for night vision preservation
- Dual-Light (flashlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual body switches
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by 2 AAA premium batteries (included)
- 1 Year Limited Warranty\*



High-efficiency deep parabolic reflector



Dual body switches

## INCLUDED


- Flashlight
- 2 AAA batteries
- Removable pocket clip



| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-1400B | 80376 2     |
| NSP-1400R | 80377 9     |
| NSP-1400T | 80378 6     |
| NSP-1402B | 80379 3     |
| NSP-1404B | 80380 9     |


## NSP-1400B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400R SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400T SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1402B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-15
- Run-time: flashlight-3 hrs, floodlight-2.8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



## NSP-1404B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-10
- Run-time: flashlight-3 hrs, floodlight-5.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



**Multi-Purpose - Polymer**

**Dual-Light™ Flashlights w/ Dual Magnets**

These non-rechargeable Dual-Light™ flashlights use a CREE® LED rated at 130 lumens paired with a high-efficiency deep parabolic reflector, creating a flashlight beam with an effective range of 181 meters (over 590 feet). Additionally, built into the handle is a 110 lumen floodlight. Unlike the flashlight beam, the light coming out of the floodlight does not have a reflector so the light spreads out in a wide, even, unfocused pattern of light...perfect for lighting up things that are close. The waterproof design, in combination with an impact and chemical resistant engineered polymer housing, make these tough little lights, one of the best values around. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage.

The flashlight is actuated by means of the top body switch providing both momentary and constant-on functionality. The floodlight is operated using the bottom button. Additionally, both lights can be turned on at the same time for even more versatile lighting options. Now you have a light for distance and one for close up work.

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**130** Flashlight Lumens

**110** Floodlight Lumens

**235** Dual-Light™ Lumens

- 9.5 Hours run-time
- Two Integrated hands-free magnets
- Beam distance rated at 181 meters



**NSP-2422R**

**NSP-2422B**

NSP-2422R



NSP-2422B




# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Powered by 3 AA premium batteries (included)
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-130, floodlight-110, dual-light-235
- Run-time: flashlight-9.5 hrs, floodlight-10.5 hrs, dual-light-6 hrs
- Beam distance: 181 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1 x 1.3in, weight: 6.4oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard
- 3 AA batteries




Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle




Hands-free magnet in base



Hands-free magnet in pocket clip



Dual body switches



High-efficiency deep parabolic reflector



Wide-beam floodlight



| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-2422B | 80352 6     |
| NSP-2422R | 80353 3     |

# Multi-Purpose - Rechargeable

## Multi-Purpose Work Light Rechargeable

Spotlight



Floodlight



Dual-Light



This dual-switch rechargeable Multi-Purpose Work Light is one of the most versatile lights available. It is actually two lights in one...a spotlight and a floodlight. Rated at 200 lumens, the spotlight beam on this light puts a beam of light exactly where you need it. This unique work light also has a non-focused 170 lumens floodlight built into the handle. Because the floodlight does not have a reflector, the light spreads out in a wide even pattern of light expressly for the purpose of lighting up areas that are close by. Now you have two completely different patterns of light for whatever work needs to be done...a spotlight for locating the problem, and a floodlight for lighting up the area while the problem is being fixed. You can even turn both lights on at the same time for even more lighting options. The ergonomic shape of the handle makes it a pleasure to hold, and the flat-bottom design means it will stand up on virtually any flat surface. For additional hands-free options, the work light includes a Hook/Prop Stand. It can be used to hang the work light up, and because it can rotate 360 degrees around the body of the light, the light can be pointed to exactly where it's needed. Power comes from an integrated Nickel Metal Hydride battery.

**200** Spotlight  
Lumens

**170** Floodlight  
Lumens

**325** Dual-Light™  
Lumens

- 3 Hours run-time
- 170 Meter beam distance
- Integrated Nickel Metal Hydride (NiMH) battery



**NSR-2492B**



TECHNOLOGY

**NSR-2492**

NSR-2492B



NSR-2492




# Multi-Purpose - Rechargeable

## FEATURES

- Three lighting modes: spotlight, floodlight & Dual-Light™ (both the spotlight & floodlight at the same time)
- Dual-switch design: top – spotlight, bottom - floodlight
- Engineered polymer housing
- Ergonomic shape to the handle makes it a pleasure to hold and use
- Flat bottom base make it possible to stand the light up for hands-free use
- The integrated hook/prop stand further increase the hands-free options
- Bright white LEDs with a 35,000 hour life
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: spotlight-200, floodlight-170, dual-light-325
- Run-time: spotlight-3 hrs, floodlight-2.5 hrs, dual-light-1.5 hrs
- Beam distance: 170 m
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 11.5 in, handle 1.7 in, bezel: 1.8 in, weight: 10.1 oz




## INCLUDED

- Worklight
- Integrated Nickel Metal Hydride battery
- Hook/Prop Stand
- AC power supply/charger
- 12 V DC power supply/charger



Integrated hook/prop stand



Push-button control



Flat bottom base



Ergonomic shape handle

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSR-2492  | 12492 8     |
| NSR-2492B | 80434 9     |

# Multi-Purpose - Rechargeable

## Multi-Purpose Work Lights Rechargeable

This rechargeable all LED Work Light has both a spotlight and a floodlight built in. The spotlight, located in the base of the handle, is rated at 32 Lumens. It's perfect for putting a narrow beam of light into a specific area. The floodlight, rated at 230 Lumens, is designed for lighting up a large area. The idea is simple, use the spotlight to find the problem, and the floodlight to light up the area when fixing the problem. The work light has two magnets built in...one at the balance point in the middle of the handle, and the other at the tip of the light. The flat-bottom design of the handle means the light will stand up on most flat surfaces, and the octagonal shape to the handle keeps the floodlight aimed in the correct direction when you lay the light on its side. Further adding to the work light's hands-free features is the detachable magnetic hook. It can be attached to either integrated body magnet and rotated 360 degrees. The integrated Nickel Metal Hydride battery can be recharged with the included AC or DC power supply/charger.

Spotlight



Floodlight



**32** Spotlight  
Lumens

**230** Floodlight  
Lumens

- 3 Hours run-time
- Dual Integrated Magnets & Hook
- Single Rocker Switch
- Powered by integrated Nickel Metal Hydride rechargeable battery



**NSR-2166R**

**NSR-2166B**

**SLR-2166**

NSR-2166R



NSR-2166B



SLR-2166



# Multi-Purpose - Rechargeable

## FEATURES: ALL MODELS

- Light has 60 LEDs rated at 230 lumens arranged in a floodlight pattern and 6 LEDs in the base of the handle rated at 32 lumens serving as a spotlight
- Two built-in magnets, one at the tip of the light and the other at the mid-point of the body for hands-free use
- Magnetic hook can be attached to either of the built-in magnets and can be rotated 360 degrees for even more hands-free versatility
- Octagonal body design keeps the light in place when laid on its side
- Flat bottom design allows the light to stand up
- Water Resistant
- Impact & chemical resistant
- Integrated Nickel Metal Hydride (NiMH) battery
- Includes both AC & DC power supply/charger
- Limited 1 Year Warranty\*

## SPECIFICATIONS

- Lumens: floodlight 230, spotlight 32
- Run-time: floodlight 3 hrs, spotlight 18 hrs
- Recharge time: 8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 14.3in, head diameter: 1.4in, handle diameter: 1.8in, weight: 16oz

## INCLUDED

- Worklight with built-in dual magnets (body & tip)
- Integrated Nickel Metal Hydride battery
- Removeable hook
- AC power supply/charger
- 12 V DC power supply/charger



6 LED Spotlight



Magnet on top with removable hook



Magnet on body with removable hook



Using the floodlight



Using the spotlight

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSR-2166B | 80362 5     |
| NSR-2166R | 80363 2     |
| SLR-2166  | 80025 9     |

**XTREME  
LUMENS™**

## Multi-Purpose - Rechargeable

# Multi-Purpose Work Lights Rechargeable

 Floodlight  
High

 Floodlight  
Low


# 600 Lumens High

# 225 Lumens Low

- Xtreme Lumens™ design
- Dual-brightness Floodlight – 600/225 Lumens
- Three heavy-duty integrated magnets plus a detachable magnetic hook
- Single sealed push button switch
- Powered by integrated Lithium-ion rechargeable battery



The Nightstick Xtreme Lumens™ Rechargeable Multi-Purpose LED Work Light is all about super-bright hands-free lighting. The floodlight has two brightness modes, high at 600 lumens and low at 225. The single push button body switch located on the handle controls all lighting modes. The NSR-2168 has three heavy-duty magnets built into the light, one at the tip one at the mid-point of the body and one built into the base for multiple hands-free uses. The flat-bottom design of the handle means the light will stand up on most flat surfaces, and the octagonal shape to the handle keeps the floodlight aimed in the correct direction when you lay the light on its side. Further adding to the work light's hands-free features is the detachable magnetic hook. It can be attached to either the body or tip magnets and can be rotated 360 degrees for even more hands-free versatility. The integrated Lithium-ion battery can be recharged with the included AC or DC power supply/charger.


**NSR-2168R**

**NSR-2168B**

NSR-2168B



NSR-2168R





# Multi-Purpose - Rechargeable



## FEATURES: ALL MODELS


- Xtreme Lumens™ design
- Dual-brightness Floodlight – 600/225 Lumens
- Three heavy-duty integrated magnets, one at the tip of the light one at the mid-point of the body and one built into the base for multiple hands-free uses
- Magnetic hook can be attached to either the body or tip magnets and can be rotated 360 degrees for even more hands-free versatility
- Octagonal body design keeps the light in place when laid on its side
- Flat bottom design allows the light to stand up
- User-replaceable lens
- Water resistant
- Impact & chemical resistant
- Powered by integrated Lithium-ion battery
- Includes both AC & DC power supply/charger
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high floodlight 600, low floodlight 225
- Run-time: high floodlight 4 hrs 30 min, low floodlight 12 hrs 30 min
- Recharge time: 6 hrs (typical)
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 14.6in, handle diameter: 2in x 2in, weight: 12.2oz

## INCLUDED


- Worklight with three heavy-duty integrated magnets
- AC & DC power supply/chargers
- Recharge time: 6 hrs
- Integrated Lithium-ion battery
- Detachable magnetic hook

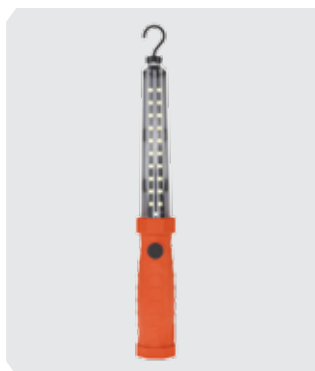

20 LED floodlight



Magnet on top with removable hook

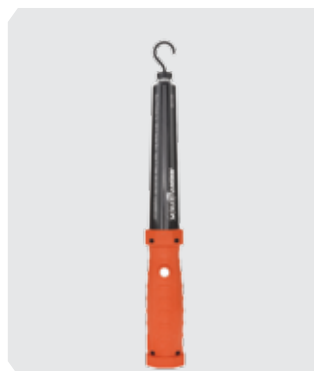

Magnet on body with removable hook



Magnet on bottom

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSR-2168B | 80442 4     |
| NSR-2168R | 80443 1     |

## Multi-Purpose - Rechargeable

# Emergency Area Light / Under Hood Work Light Rechargeable

The SLR-2120 Emergency Area Light / Under Hood Work Light, is an all LED, hands-free floodlight. This rechargeable work light has an adjustable cradle with a pair of spring-loaded, foam-covered grippers that will extend 48"-77" to attach to a large variety of surfaces including the underside of most automobile hoods. The light bar can then be rotated 360 degrees to place the lighting exactly where it's needed. The 2120 has two brightness modes: Full-power (1200 Lumens) and Half-power (650 Lumens). The dual on/off buttons, one located on each of the two handles, operate in tandem with each other. One press of either button turns the light on in Full-power Mode, a second press and you're in Half-power Mode and then a third press, turns the light off. The light bar can easily be removed from the cradle. Each of the handles can independently rotate up or down through more than 200 degrees range of motion. The flat surface at the end of each handle can serve as a stand for the light bar. Additionally, there are 3 flush-mounted magnets located in the end of each handle. This allows one or both ends of the light bar to be attached to virtually any flat metal surface. Each handle also has an integrated recessed hook that can swivel 360 degrees making it possible to hang the light bar up. The included AC & DC Power Supplies/Chargers can be used to power the 2120 during use and/or as a way to recharge the unit when it's not in use. Requiring only 6 hours to charge the SLR-2120 will run for 4.5 hours in Full-power Mode, and 8.5 hours when operating in Half-power Mode.

# 1200 Lumens

- **Two brightness modes - full-power & half-power**
- **Dual spring-loaded grippers with 48"-77" capacity built into the cradle**
- **Light bar can be rotated 360 degrees in the cradle or removed all together**
- **Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality**
- **Integrated rechargeable Lithium-ion battery - no recharge memory effect**


**SLR-2120**

SLR-2120



# Multi-Purpose - Rechargeable

## FEATURES

- All LED construction
- Two brightness modes - full-power & half-power
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality
- Light bar handles rotate up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Lithium-ion battery - no recharge memory effect
- Includes AC & DC power supplies/chargers
- Limited 1 Year Warranty \*

## SPECIFICATIONS

- Lumens: high-brightness: 1200, low-brightness: 650
- Run-time: high-brightness-4.5 hrs, low-brightness-8.5 hrs
- Recharge time: 6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 48.5 in, Width: 4.4 in, Depth: 6.5 in, Weight: 5.5 lbs

## INCLUDED

- Worklight
- Light bar cradle
- AC & DC power supplies/charger



Each handle can independently rotate up or down



Three magnets on each end with spring-loaded gripper



Dual on/off buttons operate in tandem on each handle



Recharges in 6 hours

| Model    | UPC 0 17398 |
|----------|-------------|
| SLR-2120 | 80172 0     |

## Multi-Purpose - Rechargeable

### Emergency Area Light Rechargeable

The NSR-2124 Emergency Area Light, is an all LED, hands-free floodlight. This rechargeable work light has an adjustable cradle with a pair of spring-loaded, foam-covered grippers that will extend 48"-77" to attach to a large variety of surfaces and can be rotated 360 degrees. The 2124 has dual on/off buttons, one located on each of the two handles. One press of either button turns on a 650 lumen floodlight, a second press activates an alternating red and blue floodlight and then a third press, turns the light off. The light bar can easily be removed from the cradle and the rotating magnetic handles can be attached to virtually any metal surface. The handle also has an integrated recessed hook that can swivel 360 degrees making it possible to hang the light bar up. Both AC & DC Power Supplies/Chargers are included and can be used to power the 2124 during use.

# 650 Lumens

**NSR-2124**

- **Two brightness modes - white floodlight & alternating red/blue strobe**
- **Dual spring-loaded grippers with 48"-77" capacity built into the cradle**
- **Light bar can be rotated 360 degrees in the cradle or removed all together**
- **Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality**
- **Integrated rechargeable Lithium-ion battery**



NSR-2124



# Multi-Purpose - Rechargeable

## FEATURES

- All LED construction
- Two brightness modes - white floodlight & alternating red/blue strobe
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality
- Light bar handles rotate up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Lithium-ion battery
- Includes AC & DC power supplies/chargers
- Limited 1 Year Warranty \*

## SPECIFICATIONS

- Floodlight: 650 lumens
- Run-time: 8.5 hrs
- Recharge time: 6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 48.5 in, Width: 4.4 in, Depth: 6.5 in, Weight: 5.5 lbs

## INCLUDED

- Worklight
- Light bar cradle
- AC & DC power supplies/charger



Each handle can independently rotate up or down



Three magnets on each end with spring-loaded gripper



Dual on/off buttons operate in tandem on each handle



Recharges in 6 hours

| Model    | UPC 0 17398 |
|----------|-------------|
| NSR-2124 | 80525 4     |

## Multi-Purpose - Polymer

# Dual-Light™ Flashlight w/ Dual Magnets Rechargeable

Flashlight



Floodlight



Dual-Light



The rechargeable Dual-Light™ Flashlight w/ Dual Magnets use a CREE® LED rated at 250 lumens paired with a high-efficiency deep parabolic reflector, creating a flashlight beam with an effective range of 213 meters. Additionally, built into the handle is a 140 lumen floodlight. Unlike the flashlight beam, the light coming out of the floodlight does not have a reflector so the light spreads out in a wide, even, unfocused pattern of light...perfect for lighting up things that are close. The waterproof design, in combination with an impact and chemical resistant engineered polymer housing, make this tough light, one of the best values around. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage.

The flashlight is actuated by means of the top body switch providing both momentary and constant-on functionality. The floodlight is operated using the bottom button. Additionally, both lights can be turned on at the same time for even more versatile lighting options. Now you have a light for distance and one for close up work. Power comes from a pair of integrated Lithium-ion rechargeable batteries.

**250** Flashlight  
Lumens

**140** Floodlight  
Lumens

**350** Dual-Light™  
Lumens

- 9.5 hours run-time
- Dual Integrated hands-free magnets
- Beam distance rated at 213 meters
- Powered by 2 integrated Lithium-ion rechargeable batteries



TECHNOLOGY

NSR-2522RM

NSR-2522RM




# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- High-efficiency deep parabolic reflector
- Effective beam distance of 213 meters
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight on at the same time) for maximum versatility & user safety
- Powerful integrated magnets built into the base and pocket clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes wall/vehicle mountable charger, AC/DC power supplies & removable lanyard
- Powered by two integrated Lithium-ion rechargeable batteries
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-250, floodlight-140, dual-light-350
- Run-time: flashlight-12 hrs, floodlight-12 hrs, dual-light-6 hrs
- Beam distance: 213 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1 x 1.3in, weight: 6.4oz



## INCLUDED

- Light
- Wall/vehicle mountable charger
- AC & DC power supplies
- Two integrated Lithium-ion batteries
- Removable wrist lanyard



| Model      | UPC 0 17398 |
|------------|-------------|
| NSP-2522RM | 80486 8     |




Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle




Charger



Hands-free magnet in pocket clip



Dual body switches




High-efficiency deep parabolic reflector



Wide-beam floodlight

# Headlamps

## Dual-Light™ Headlamps



These Dual-Light™ headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted switch provides user selectable spotlight/floodlight/dual-light operation. Power comes from 3 AAA premium batteries (included).

NSP-4602B

**35 Lumens**  
**Dual-Light™**  
**30 Lumens**  
Spotlight  
**15 Lumens**  
Floodlight



NSP-4602B

NSP-4604B

**90 Lumens**  
**Dual-Light™**  
**100 Lumens**  
Spotlight  
**45 Lumens**  
Floodlight



NSP-4604B

NSP-4606B

**150 Lumens**  
**Dual-Light™**  
**140 Lumens**  
Spotlight  
**50 Lumens**  
Floodlight



NSP-4606B

- Single switch control
- Engineered polymer housing
- Powered by 3 AAA batteries (included)





# Headlamps

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – floodlight – Dual-Light™
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (spotlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- 1 Year Limited Warranty\*

## INCLUDED

- Headlamp
- 3 premium alkaline AAA batteries
- Non-slip elastic head strap



| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-4602B | 80186 7     |
| NSP-4604B | 80187 4     |
| NSP-4606B | 80522 3     |

## NSP-4602B SPECIFICATIONS

- Lumens: spotlight-9, floodlight- 30, dual-light-30
- Run-time: spotlight-40 hrs, floodlight-11 hrs, dual-light-16 hrs
- Beam distance: 18 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.7oz

| FL 1 STANDARD |     |     |
|---------------|-----|-----|
| 9 LUMENS      | 40h | 18m |
| 84cd          | 2m  | 1m  |

## NSP-4604B SPECIFICATIONS

- Lumens: spotlight-55, floodlight-40, dual-light-80
- Run-time: spotlight-6 hrs, floodlight-8 hrs, dual-light-5 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.7oz

| FL 1 STANDARD |    |     |
|---------------|----|-----|
| 55 LUMENS     | 6h | 50m |
| 650cd         | 2m | 1m  |

## NSP-4606B SPECIFICATIONS

- Lumens: spotlight-140, floodlight-50, dual-light-150
- Run-time: spotlight-3.5 hrs, floodlight-8.5 hrs, dual-light-4 hrs
- Beam distance: 116 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.5oz

| FL 1 STANDARD | DUAL-LIGHT | SPOTLIGHT  |
|---------------|------------|------------|
|               | 150 LUMENS | 140 LUMENS |
|               | 4h15min    | 3h30min    |
|               | 116m       | 116m       |
|               | 3442cd     | 3442cd     |
| 2m            |            |            |
| 1m            |            |            |

NSP-4602B



NSP-4604B



NSP-4606B



# Headlamps

## Multi-Function Headlamps

These Multi-Function Headlamps feature a multi-position tilt head design and have a tight-beam long-throw spotlight designed for distance illumination. These products feature a single top mounted switch that activates both a high-brightness spotlight and a low-brightness spotlight. Power comes from 3 AAA batteries (included).

Spot High



Spot Low



NSP-4603B

**120/70 Lumens**  
**Spotlight**



NSP-4603B

NSP-4605B

**150/80 Lumens**  
**Spotlight**



NSP-4605B

- High/low-brightness spotlight
- Engineered polymer housing
- IP-X7 rated waterproof
- Adjustable elastic headband with rubberized strips
- Powered by 3 AAA batteries (included)



NSP-4603B



NSP-4605B




# Headlamps

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- IP-X7 rated waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- 1 Year Limited Warranty\*

## NSP-4603B SPECIFICATIONS

- Lumens: high spotlight-120, low spotlight-70
- Run-time: high spotlight-5.5 hrs, low spotlight-14 hrs
- Beam distance: 144 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.5oz

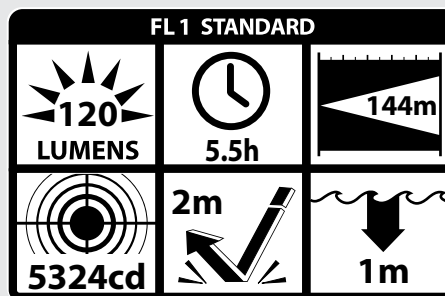

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap




| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-4603B | 80520 9     |
| NSP-4605B | 80521 6     |



## NSP-4605B SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-80
- Run-time: high spotlight-4 hrs, low spotlight-7.5 hrs
- Beam distance: 175 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.7oz

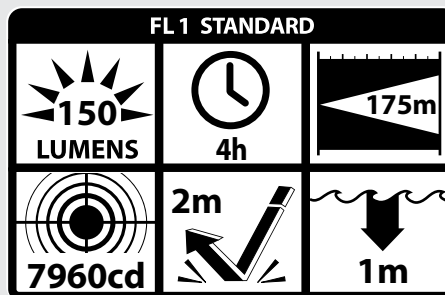

# Headlamps

## Multi-Function Headlamps

NSP-4608B

**115 Lumens**  
**Dual-Light™**

**100/60 Lumens**  
**Spotlight**

**90/50 Lumens**  
**Floodlight**

Spot High Spot Low Flood High



Flood Low Dual



These multi-function headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted dual switches provide high/low-brightness spotlight and high/low-brightness floodlight (4608), and high/low-brightness spotlight and white/red/green floodlight (4610) operation. Additionally, the spotlight & white floodlight settings on the 4608 can be selected simultaneously for even greater functionality. Power comes from 3 AAA premium batteries (included).

NSP-4610B

**150/80 Lumens**  
**Spotlight**

**100 Lumens**  
**White Floodlight**

**9 Lumens**  
**Red Floodlight**

**18 Lumens**  
**Green Floodlight**

Spot High Spot Low White Flood



Red Flood Green Flood



NSP-4608B



NSP-4610B

- Beam distance rated at 77/60 meters
- Dual-brightness spotlight and multiple brightness/color floodlight modes
- Engineered polymer housing
- Powered by 3 AAA batteries (included)




NSP-4608B



NSP-4610B



# Headlamps

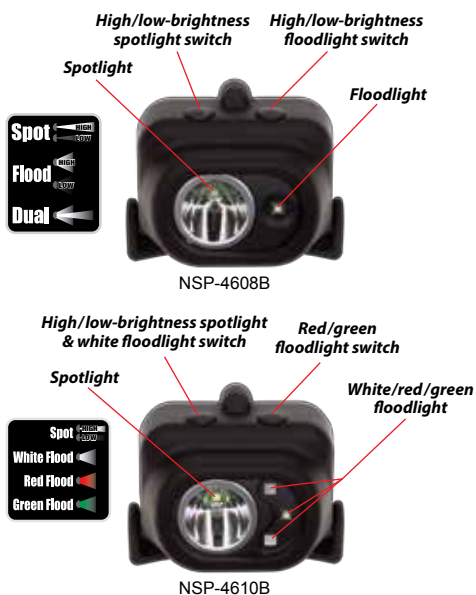

## NSP-4608B SPECIFICATIONS

- Lumens: high spotlight-100, low spotlight-60, high floodlight-90, low floodlight-50, Dual-Light-115
- Run-time: high spotlight-5 hrs, low spotlight-13.5 hrs, high floodlight-4.25 hrs, low floodlight-13.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 77 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™ (4608)
- High/low-brightness spotlight – white/red/green floodlight (4610)
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Colored floodlight for night vision preservation (4610)
- Dual-Light (spotlight & white floodlight mode at same time, 4608) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

| FL 1 STANDARD | DUAL-LIGHT | HIGH       | LOW       |
|---------------|------------|------------|-----------|
|               | 180 LUMENS | 100 LUMENS | 60 LUMENS |
|               | 2h 30min   | 5h         | 13h       |
|               | 77m        | 77m        | 55m       |
|               | 1506cd     | 1506cd     | 775cd     |
|               | 2m         |            |           |
|               | 1m         |            |           |

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap



| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-4608B | 80236 9     |
| NSP-4610B | 80237 6     |



## NSP-4610B SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-80, white floodlight-100, red floodlight-9, green floodlight-18,
- Run-time: high spotlight-4 hrs, low spotlight-8 hrs, white floodlight-4 hrs, red floodlight-25 hrs, green floodlight-22.5 hrs
- Beam distance: 60 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

| FL 1 STANDARD | HIGH       | LOW       |
|---------------|------------|-----------|
|               | 150 LUMENS | 80 LUMENS |
|               | 4h         | 8h        |
|               | 60m        | 43m       |
|               | 1377cd     | 667cd     |
|               | 2m         |           |
|               | 1m         |           |

## Headlamps

# Dual-Light™ Multi-Function Headlamp w/ Hard Hat Clip

**115 Lumens**  
Dual-Light

**100/60 Lumens**  
Spotlight

**90/50 Lumens**  
Floodlight

Spot High Spot Low Flood High



Flood Low Dual



This non-rechargeable Dual-Light™ Multi-function Headlamp w/ Hard Hat Clip features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. Utilizing Bayco's exclusive Dual-Light design, this headlamp combines a tight-beam long-throw spotlight, with a wide-beam close area floodlight. Rated at 100 & 60 lumens respectively, the high and low-brightness spotlight beams on this headlamp are designed for distance illumination. This headlamp also has two wide-beam floodlight settings rated at 90 & 50 lumens. The floodlight spreads out in a wide even pattern of light expressly for the purpose of providing illumination of areas that are close by. Additionally any combination of spotlight & floodlight settings can be selected simultaneously for even greater functionality. The top mounted dual switches provide high/low-brightness spotlight and high/low-brightness floodlight.

- **5 lighting modes: high/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™**
- **Integrated Stainless Steel Clip for attachment to hard hat mounting brackets**
- **IP-X7 rated waterproof**
- **Powered by 3 AAA batteries (included)**




TECHNOLOGY

NSP-4608BC

**NSP-4608BC**



# Headlamps

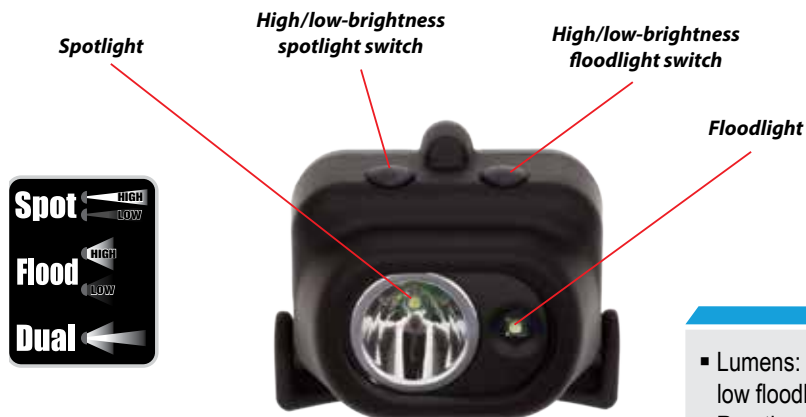

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™
- Integrated Stainless Steel Clip for use with most hard hat mounting brackets
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (any spotlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS


- Lumens: high spotlight-100, low spotlight-60, high floodlight-90, low floodlight-50, Dual-Light-115
- Run-time: high spotlight-5 hrs, low spotlight-13.5 hrs, high floodlight-4.25 hrs, low floodlight-13.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 77 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Length: 2.1in, width: 2.6in, depth: 1.8in, weight: 3.4oz

| FL 1 STANDARD | DUAL-LIGHT           | HIGH                 | LOW                 |
|---------------|----------------------|----------------------|---------------------|
|               | <b>180</b><br>LUMENS | <b>100</b><br>LUMENS | <b>60</b><br>LUMENS |
|               | <b>2h 30min</b>      | <b>5h</b>            | <b>13h</b>          |
|               | <b>77m</b>           | <b>77m</b>           | <b>55m</b>          |
|               | <b>1506cd</b>        | <b>1506cd</b>        | <b>775cd</b>        |

## INCLUDED



- Headlamp w/ Hard Hat Clip
- 3 – AAA Batteries

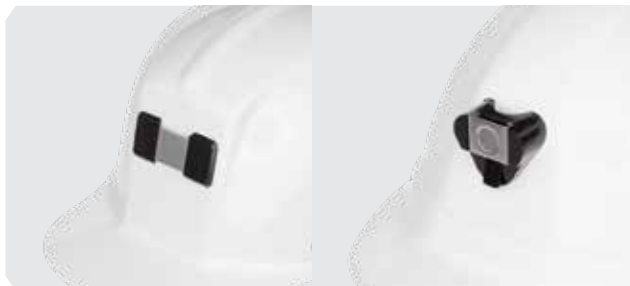

Fits most hard hat mounting brackets



Integrated stainless steel clip



Tool-less secure pressure fit mounting

|              |                    |
|--------------|--------------------|
| <b>Model</b> | <b>UPC 0 17398</b> |
| NSP-4608BC   | 80487 5            |

# Headlamps

## Dual-Light™ Multi-Function Headlamp


*This headlamp is the ideal hands-free lighting tool when working in a location where maximum lighting options and maximum run-times are a requirement. The top mounted dual switches provide white spotlight, high & low-brightness white floodlight, red floodlight and Dual-Light™ control. With the battery compartment located in the back, optimal balance is achieved whether the light is worn directly on the head or on a hard hat. The light includes two straps...the heavy-duty rubber head strap for use on a hard hat and the non-slip elastic head strap for use on a ball cap or directly on the user's head. Power is supplied from 3 included AA batteries.*

**175 Lumens**  
**Dual-Light™**

**100 Lumens**  
**Spotlight**

**90/20 Lumens**  
**White Floodlight**

**18 Lumens**  
**Red Floodlight**



- **Beam distance rated at 140 meters**
- **Spotlight, dual brightness white/red floodlight modes**
- **Engineered polymer housing**
- **Powered by 3 AA Premium batteries (included)**


**NSP-4612B**

NSP-4612B





# Headlamps

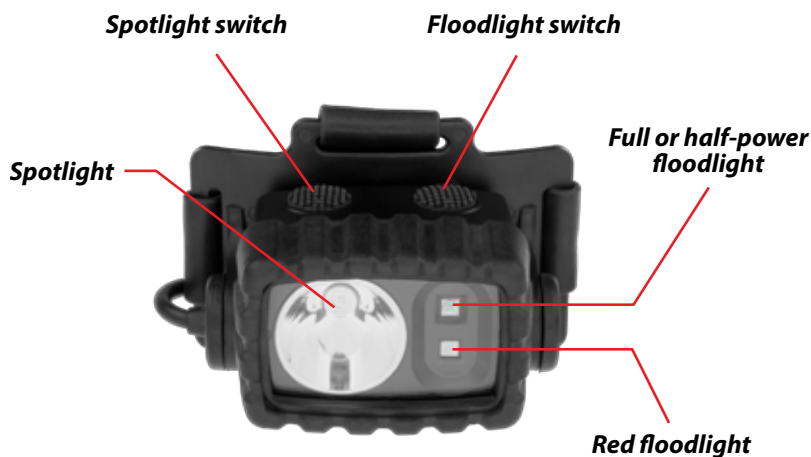

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight - high/low-brightness white floodlight - red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight for night vision preservation
- Dual-Light™ (spotlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: spotlight-100, high floodlight-90, low floodlight-20, red floodlight-18, Dual-Light-175
- Run-time: spotlight-18 hrs, high floodlight-13.5 hrs, low floodlight-75 hrs, red floodlight-37 hrs, Dual-Light-3.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

| FL1 STANDARD | DUAL-LIGHT | SPOTLIGHT  |
|--------------|------------|------------|
|              | 175 LUMENS | 100 LUMENS |
|              | 6h 30min   | 18h        |
|              | 154m       | 140m       |
|              | 5291cd     | 4820cd     |
|              |            |            |
|              |            |            |

| Model     | UPC 0 17398 |
|-----------|-------------|
| NSP-4612B | 80351 9     |



Heavy-duty rubber head strap

## INCLUDED

- Headlamp
- 3 Premium alkaline AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap



## Headlamps


# Low-Profile LED Multi-Function Dual-Light™ Headlamp

**300 Lumens**  
Dual-Light™


**150/75 Lumens**  
Spotlight

**150/75 Lumens**  
Floodlight

Spot High



Spot Low



Flood High



Flood Low



Dual



- Low profile design
- Glass-filled nylon polymer housing
- 5 lighting modes: high/low-brightness white spotlight & high/low-brightness white floodlight and Dual-Light
- Dual button design
- IP-X7 rated waterproof
- Powered by 3 AAA batteries (included)

The Nightstick NSP-4614B Low-Profile Multi-Function Dual-Light™ Headlamp is designed specifically to work on hard hats that have a flip-up face shield. The unique low-profile shape allows the user to work without having to remove the headlamp when raising or lowering their face shield. The NSP-4614B is manufactured from glass-filled nylon polymer and features a multi-position tilt head design. Both the spotlight and the floodlight use CREE® LED's and an advanced (TIR) Total Internal Reflection set of lenses designed to optimize lumen output and beam pattern. The spotlight and the floodlight are both rated at 150 Lumens in high mode and 75 Lumens in low mode. Front mounted dual switches provide easy access to the spotlight for distance illumination, the floodlight for close-up illumination, and Dual-Light for maximum lighting, versatility and user safety. The NSP-4614B includes a heavy-duty rubber head strap for use on a hard hat, as well as, a non-slip elastic head strap for use on a ball cap or directly on the user's head. Power is supplied from 3 AAA batteries (included).



TECHNOLOGY




**NSP-4614B**

NSP-4614B



# Headlamps



## SPECIFICATIONS

- Lumens:  
high spotlight-150, low spotlight-75, high floodlight-150, low floodlight-75, Dual-Light-300
- Run-time:  
high spotlight-3 hrs, low spotlight-6 hrs, high floodlight-3 hrs, low floodlight-6 hrs, Dual-Light-1.5 hrs
- Beam distance: 76/55 meters
- Water rating: IP-X7
- Drop rating: 1 meter
- Length: 3.54in, width: 1.58in, height: 1.875in, weight: 5.8oz

| FL 1 STANDARD | DUAL-LIGHT | HIGH       | LOW       |
|---------------|------------|------------|-----------|
|               | 300 LUMENS | 150 LUMENS | 75 LUMENS |
|               | 1h 30min   | 3h         | 6h        |
|               | 120m       | 113m       | 83m       |
|               | 3599cd     | 3229cd     | 1722cd    |
|               | 2m         |            | 1m        |

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Focused high/low-brightness spotlight beam for distance illumination
- Unfocused high/low-brightness wide-beam floodlight for close-up illumination
- Dual-Light™ (spotlight and floodlight on at the same time) for maximum versatility
- Glass-filled nylon polymer housing
- (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern
- Dual switches located on front of light
- Adjustable tilt head
- Heavy-duty rubber strap for hard hat applications
- Non-slip elastic head strap
- IP-X7 waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*

## INCLUDED

- Headlamp
- 3 AAA batteries
- Heavy-duty rubber head strap
- Elastic non-slip head strap



Adjustable tilt head



Dual switches located on front of light



Heavy-duty rubber head strap



3 AAA batteries included

|           |             |
|-----------|-------------|
| Model     | UPC 0 17398 |
| NSP-4614B | 80505 6     |

## Headlamps

# Low-Profile Dual-Light™ Headlamp

**450 Lumens**  
Dual-Light™

**250/125 Lumens**  
Spotlight

**250/125 Lumens**  
Floodlight

Spot High Spot Low



Flood High Flood Low Dual



- Low profile design
- Glass-filled nylon polymer housing
- 5 lighting modes: high/low-brightness white spotlight & high/low-brightness white floodlight and Dual-Light
- IP-X7 rated waterproof
- Powered by 3 AA batteries (included)

The Nightstick NSP-4616B Low-Profile Dual-Light™ Headlamp is designed specifically to work on fire helmets and hard-hats that have a flip-up face shield. The unique low-profile shape allows the user to work without having to remove the headlamp when raising or lowering their face shield. The NSP-4616B is manufactured from glass-filled nylon polymer and features a multi-position tilt head design. Both the spotlight and the floodlight use CREE® LED's and an advanced (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern. The spotlight and the floodlight are both rated at 250 lumens in high mode and 125 lumens in low mode. Front mounted dual switches provide easy access to the spotlight for distance illumination, the floodlight for close-up illumination, and Dual-Light for maximum lighting, versatility and user safety. The NSP-4616B includes a heavy-duty rubber head strap for use on a fire helmet or hard-hat, and is powered by 3 AA batteries (included).



TECHNOLOGY



NSP-4616B

NSP-4616B



# Headlamps

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Focused high/low-brightness spotlight beam for distance illumination
- Unfocused high/low-brightness wide-beam floodlight for close-up illumination
- Dual-Light™ (spotlight and floodlight on at the same time) for maximum versatility
- Glass-filled nylon polymer housing
- (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern
- Dual switches located on front of light
- Adjustable tilt head
- Battery pack located in the rear of the strap
- Amber colored rear facing led
- Heavy-duty rubber strap for hard hat applications
- IP-X7 waterproof
- Impact & chemical resistant
- Powered by 3 AA batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high spotlight-250, low spotlight-125, high floodlight-250, low floodlight-125, Dual-Light-450
- Run-time: high spotlight-6.5 hrs, low spotlight-10.5 hrs, high floodlight-6.5 hrs, low floodlight-10.5 hrs, Dual-Light-3.5 hrs
- Beam distance: 87/78 meters
- Water rating: IP-X7
- Drop rating: 1 meter
- Length: 1.25in, width: 3.75in, depth: 1in, weight: 9.3oz

| FL1 STANDARD | DUAL-LIGHT | HIGH       | LOW        |
|--------------|------------|------------|------------|
|              | 450 LUMENS | 250 LUMENS | 125 LUMENS |
|              | 3h 30min   | 6h 30min   | 10h        |
|              | 87m        | 78m        | 38m        |
|              | 1870cd     | 1500cd     | 370cd      |
|              | 2m         |            | 1m         |

## INCLUDED

- Headlamp
- 3 AA batteries
- Heavy-duty rubber head strap



Low-profile to clear hard-hat visors



Heavy-duty rubber strap



Rear-facing amber led



Adjustable tilt head



Low-profile to clear the face shield on fire helmets

Model UPC 0 17398

NSP-4616B 80523 0

# Intrinsically Safe Permissible

## Polymer Penlight



This penlight is cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



# 30 Lumens

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Engineered polymer housing
- Powered by AAA batteries

**XPP-5410G**



XPP-5410G




# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 2 AAA batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 30
- Run-time: 18 hrs
- Beam distance: 40 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.8in, head diameter: 0.9in, handle diameter: 0.7in, weight: 1.9oz




## INCLUDED

- Flashlight
- 2 AAA batteries

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible.

Patent 7,738,229



XPP-5410G



High-efficiency deep parabolic reflector



Push-button tail-cap switch

Permissible XPP-5410 Flashlight Assembly

**MSHA** APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.

|                 |   |  |   |  |
|-----------------|---|--|---|--|
|                 | ID 4001184<br>INTRINSICALLY SAFE<br>SECURITE INTRINSEQUE  |  | 0359  |  |
| <b>Intertek</b> | CLASS I DIV 1 GRPS A-D T3<br>CLASS II & III DIV 1 GRPS E-G T135C<br>CLASS I ZONE 0 AEx ia IIC T3 Ga<br>CLASS I ZONE 0 Ex ia IIC T3 Ga<br>⊕ I M 1 Ex ia op is I Ma<br>⊕ II 1 G Ex ia op is IIC T3 Ga |  | Ex ia op is I Ma<br>Ex ia op is IIC T3 Ga<br>Intertek ITS 13 ATEX27839X<br>IECEx ITS 14.0036X<br>-20°C ≤ Tamb ≤ +40°C<br>1.5V/Cell AAA Alkaline |  |

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5410G | 80298 7     |

# Intrinsically Safe

## Polymer Penlight



*This penlight is cETLus, ATEX and IECEx listed Intrinsically Safe. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).*

**INTRINSICALLY SAFE**

Flashlight



# 50 Lumens

- cETLus, ATEX and IECEx listed Intrinsically Safe
- Engineered polymer housing
- Powered by AAAA batteries

**XPP-5412G**



XPP-5412G






# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 3 AAAA batteries (included)
- Limited Lifetime Warranty\*



XPP-5412G




High-efficiency deep parabolic reflector



Push-button tail-cap switch

## SPECIFICATIONS

- Lumens: 50
- Run-time: 13.75 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.8in, head diameter: 0.6in, handle diameter: 0.5in, weight: 1.5oz



## INCLUDED


- Flashlight
- 3 AAAA batteries

## SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe.

Patent 7,738,229

Nightstick 5412 Penlight

 ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma  
CLASS II & III DIV1 GRPS E-G T135C Ex ia op is IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27839X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 14.0036X  
© I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C  
© II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AAAA Alkaline

CE 0359

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

|              |                    |
|--------------|--------------------|
| <b>Model</b> | <b>UPC 0 17398</b> |
| XPP-5412G    | 80299 4            |

# Intrinsically Safe Permissible

## Polymer Flashlights



These non-rechargeable flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**



Flashlight



# 140 Lumens

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 180 meters
- Engineered polymer housing



**XPP-5420G**



**XPP-5420B**

XPP-5420G

XPP-5420B



# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*



Built in pocket/belt clip




Single body switch



High-efficiency deep parabolic reflector

## SPECIFICATIONS

- Lumens: 140
- Run-time: 14 hrs
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 7.3oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Permissible Nightstick 5420 Flashlight

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

**ETL** US ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE

**Intertek** CLASS I DIV 1 GRPS-A-D T3 Ex ia I Ma CLASS II & III DIV 1 GRPS-E-G T13G Ex ia IIC T3 Ga CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27837X CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C Ⓜ I M 1 Ex ia I Ma Ⓜ I I G Ex ia IIC T3 Ga 1.5V/Cell AA Alkaline

**Segurança** INTRINSICALLY SAFE

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5420G | 80091 4     |
| XPP-5420B | 80092 1     |

# Intrinsically Safe Permissible

## Polymer Dual-Light™ Flashlights



These non-rechargeable Dual-Light™ flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**120** Flashlight  
Lumens

**120** Floodlight  
Lumens

**240** Dual-Light™  
Lumens

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Flashlight / Floodlight / Dual-Light™
- Beam distance rated at 170 meters
- Engineered polymer housing



**XPP-5422B**

**XPP-5422G**

XPP-5422G



XPP-5422B




# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Built in pocket/belt clip

Dual body switches

High-efficiency deep parabolic reflector

Wide-beam floodlight



Permissible Nightstick 5422 Flashlight/Floodlight  
 APPROVAL No. 20-A130001-0  
 TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY  
 WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.

|  |   |  |                               |   |
|--|---|--|-------------------------------|---|
|  | ID 4003544<br>INTRINSICALLY SAFE<br>SECURITE INTRINSEQUE  |  | 0359                          |   |
|  | CLASS I DIV 1 GRPS A-D T3<br>CLASS II & III DIV 1 GRPS E-G T135C<br>CLASS I ZONE 0 AEx ia IIC T3 Ga<br>CLASS I ZONE 0 Ex ia IIC T3 Ga<br>Ⓜ I M 1 Ex ia I Ma<br>Ⓜ II 1 G Ex ia IIC T3 Ga |  | Ex ia I Ma<br>Ex ia IIC T3 Ga | Intertek ITS 13 ATEX27837X<br>IECEx ETL 13.0026X<br>-20°C ≤ Tamb ≤ +40°C<br>1.5V/Cell AA Alkaline |

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5422G | 80093 8     |
| XPP-5422B | 80094 5     |

**Intrinsically Safe Permissible**

**Polymer Dual-Light™ Flashlight w/ Dual Magnets**



This non-rechargeable Dual-Light™ flashlight with dual magnets is cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**XPP-5422GM**

**120** Flashlight Lumens  
**120** Floodlight Lumens  
**240** Dual-Light™ Lumens

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible
- Flashlight / Floodlight / Dual-Light™
- Two Integrated hands-free magnets
- Beam distance rated at 170 meters



XPP-5422GM




# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility and user safety
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.2in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Built in pocket/belt clip with integrated magnet

Integrated magnet built into the handle

High-efficiency deep parabolic reflector

Wide-beam floodlight



Hands-free magnet in base



Hands-free magnet in pocket clip

|  |  |
|--|--|
| Permissible Nightstick 5422 Flashlight/Floodlight  |  |
| <b>MSHA</b>  | APPROVAL No. 20-A130001-0  |
| TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY   |  |
| WARNINGS: MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only. The Model Nightstick 5422 must not be opened in areas where permissibility is required. |  |
| <b>ETL</b> US  | ID 4003544<br>INTRINSICALLY SAFE<br>SECURITE INTRINSEQUE   |
| <b>Intertek</b>  | CE 0359  |
| CLASS I DIV 1 GRPS A-D T3<br>CLASS II & III DIV 1 GRPS E-G T135C<br>CLASS I ZONE 0 AEx ia IIC T3 Ga<br>CLASS I ZONE 0 Ex ia IIC T3 Ga<br>Ⓢ I M 1 Ex ia I Ma<br>Ⓢ II 1 G Ex ia IIC T3 Ga  | Ex ia I Ma<br>Ex ia IIC T3 Ga<br>Intertek ITS 13 ATEX27837X<br>IECEx ETL 13.0026X<br>-20°C ≤ Tamb ≤ +40°C<br>1.5V/Cell AA Alkaline |
| <b>Conforms to:</b><br>ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26   | <b>Certified to:</b><br>CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25 |

| Model      | UPC 0 17398 |
|------------|-------------|
| XPP-5422GM | 80448 6     |

# Intrinsically Safe

## Dual-Function Headlamps



These non-rechargeable dual-function headlamps are cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe. The headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA premium batteries (included).

**INTRINSICALLY SAFE**



XPP-5450G

**60/40 Lumens Spotlight**



XPP-5452G

**115/65 Lumens Spotlight**



**XPP-5450G**

**XPP-5452G**

- cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe
- High/low-brightness spotlight
- 80/92 Meter beam distance
- Engineered polymer housing



XPP-5450G

XPP-5452G





# Intrinsically Safe

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe Patent 7,738,229

High/Low-brightness spotlight switch



Spotlight

## XPP-5450G SPECIFICATIONS

- Lumens: high spotlight-60, low spotlight-40
- Run-time: high spotlight-13.5 hrs, low spotlight-22.75 hrs
- Beam distance: 80 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

| FL 1 STANDARD | HIGH      | LOW       |
|---------------|-----------|-----------|
|               | 60 LUMENS | 40 LUMENS |
|               | 13h       | 22h       |
|               | 80m       | 65m       |
|               | 1615cd    | 1076cd    |
|               | 2m        | 1m        |



## XPP-5452G SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-65
- Run-time: high spotlight-4.5 hrs, low spotlight-13 hrs
- Beam distance: 92 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

| FL 1 STANDARD | HIGH       | LOW       |
|---------------|------------|-----------|
|               | 115 LUMENS | 65 LUMENS |
|               | 4h 30min   | 13h       |
|               | 92m        | 67m       |
|               | 2152cd     | 1141cd    |
|               | 2m         | 1m        |



## INCLUDED

- Headlamp
- 3 AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Nightstick 5450 Headlamp**

ETL US ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE

Intertek

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ©II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5450G | 80300 7     |
| XPP-5452G | 80301 4     |

**Nightstick 5452 Headlamp**

ETL US ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE

Intertek

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ©II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

**Intrinsically Safe**


**Multi-Function Dual-Light™ Headlamp**



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**

**160 Lumens**  
**Dual-Light™**  
**115/60 Lumens**  
**Spotlight**  
**120/60 Lumens**  
**Floodlight**



**XPP-5454G**


- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe
- 82 Meter beam distance
- Dual brightness spotlight & floodlight plus Dual-Light™
- Engineered polymer housing



XPP-5454G



# Intrinsically Safe

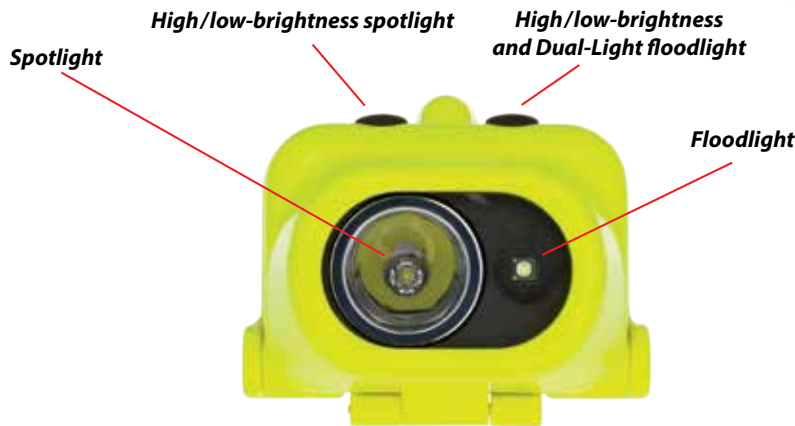

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Focused spotlight beam for distance illumination
- Wide unfocused floodlight beam for close-up illumination
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe  
 Patent 7,738,229

Nightstick 5454 Headlamp

|   |   |
|---|---|
| <br>ID 4008947<br>INTRINSICALLY SAFE<br>SECURITE INTRINSEQUE                          | <br>INMETRO   |
|   |   |
| Conforms to:<br>ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26 | Certified to:<br>CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25 |

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5454G | 80427 1     |

## SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

| FL1 STANDARD | DUAL-LIGHT | HIGH       | LOW       |
|--------------|------------|------------|-----------|
|              | 160 LUMENS | 115 LUMENS | 60 LUMENS |
|              | 3h 30min   | 5h         | 16h       |
|              | 94m        | 82m        | 60m       |
|              | 1711cd     | 1668cd     | 882cd     |
|              | 2m         |            |           |
|              | 1m         |            |           |

## INCLUDED

- Headlamp
- 3 AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Intrinsically Safe**

**Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip**




This non-rechargeable multi-function Dual-Light™ headlamp w/ Hard Hat Clip is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**

**160 Lumens**  
**Dual-Light™**

**115/60 Lumens**  
**Spotlight**

**120/60 Lumens**  
**Floodlight**



TECHNOLOGY

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe
- 5 lighting modes: high/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Integrated Stainless Steel Clip for attachment to hard hat mounting brackets


**XPP-5454GC**



XPP-5454GC



# Intrinsically Safe

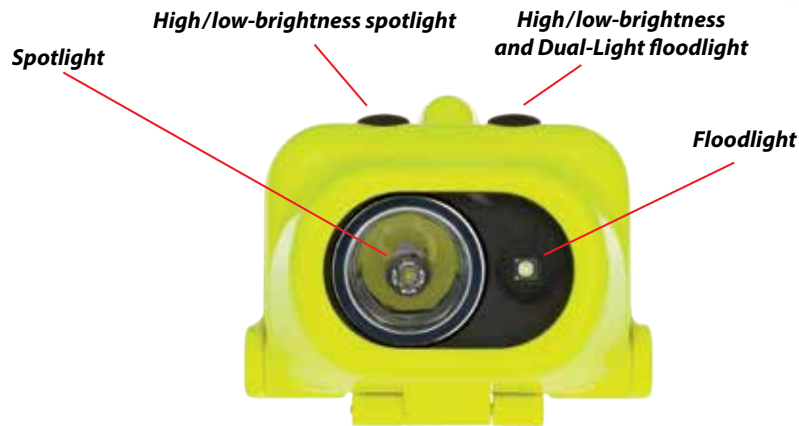

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Integrated Stainless Steel Clip for use with most hard hat mounting brackets
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (any spotlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING






cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe  
 Patent 7,738,229

|  |  |
|--|--|
| Nightstick 5454 Headlamp   |  |
| <br>ID 4008947<br>INTRINSICALLY SAFE<br>SECURITE INTRINSEQUE                                    | <br>Seguridad<br>NCC<br>INMETRO<br>NCC 15.008 X |
| Intertek<br>CLASS I DIV 1 GRPS A-D T3<br>CLASS II & III GRPS E-G T135C<br>CLASS I ZONE 0 AEx ia IIC T3 Ga<br>CLASS I ZONE 0 Ex ia IIC T3 Ga<br>© II 1 G Ex ia IIC T3 Ga<br>CE 0359 | Ex ia IIC T3 Ga<br>Intertek ITS 13 ATEX27928X<br>IECEx ETL 13.0045X<br>-20°C ≤ Tamb ≤ +40°C<br>1.5V/Cell AAA Alkaline              |
| Conforms to:<br>ANSI/UL STD 913, ANSI/UL<br>60079-0, ANSI/UL 60079-11<br>ANSI/ISA 60079-26   | Certified to:<br>CAN/CSA STD C22.2 No 157<br>CAN/CSA STD C22.2 No 60079-0<br>CAN/CSA STD C22.2 No 60079-11<br>CSA STD C22.2 No 25  |

| Model      | UPC 0 17398 |
|------------|-------------|
| XPP-5454GC | 80450 9     |

## SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, length: 2.1in, depth: 1.8in, weight: 3.4oz

| FL1 STANDARD   | DUAL-LIGHT           | HIGH                 | LOW                 |
|--|----------------------|----------------------|---------------------|
|  | <b>160</b><br>LUMENS | <b>115</b><br>LUMENS | <b>60</b><br>LUMENS |
|   | <b>3h 30min</b>      | <b>5h</b>            | <b>16h</b>          |
|   | <b>94m</b>           | <b>82m</b>           | <b>60m</b>          |
|   | <b>1711cd</b>        | <b>1668cd</b>        | <b>882cd</b>        |
|  | <b>2m</b>            |                      | <b>1m</b>           |

## INCLUDED

- Headlamp w/ Hard Hat Clip
- 3 AAA batteries

**Intrinsically Safe Permissible**

**Multi-Function Dual-Light™ Headlamp**



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a red colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE  
PERMISSIBLE**

**175 Lumens**  
**Dual-Light™**

**100 Lumens**  
**Spotlight**

**90/20 Lumens**  
**White Floodlight**

**18 Lumens**  
**Red Floodlight**



- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 140 meters
- Spotlight, dual brightness white/red floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)

**XPP-5456G**



XPP-5456G



# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible  
 Patent 7,738,229

Permissible Nightstick XPP-5456G Headlamp

**MSHA** APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5456G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5456G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approve as a cap lamp under 30CFR, Part 19.

**ETL** ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga Intertek ITS 13 ATEX27838X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0025X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5456G | 80156 0     |



## SPECIFICATIONS

- Lumens: spotlight-100, high white floodlight-90, low white floodlight-20, red floodlight-18, Dual-Light-175
- Run-time: spotlight-18 hrs, high white floodlight-13.5 hrs, low white floodlight-75 hrs, red floodlight-37 hrs, Dual-Light-6.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

| FL 1 STANDARD | DUAL-LIGHT | SPOTLIGHT  |
|---------------|------------|------------|
|               | 175 LUMENS | 100 LUMENS |
|               | 6h 30min   | 18h        |
|               | 154m       | 140m       |
|               | 5291cd     | 4820cd     |
|               |            |            |
|               |            |            |

## INCLUDED

- Headlamp
- 3 AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Headlamp



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a green colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE  
PERMISSIBLE**

**190 Lumens**  
**Dual-Light™**

**130 Lumens**  
**Spotlight**

**100/25 Lumens**  
**Floodlight**

**21 Lumens**  
**Green Floodlight**



- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 120 meters
- Spotlight, dual brightness white/green floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)



**XPP-5458G**

XPP-5458G





# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – green floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Green colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible  
 Patent 7,738,229

Permissible Nightstick XPP-5458G Headlamp  
 APPROVAL No. 20-A130002-0

**MSHA**

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5458G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5458G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approved as a cap lamp under 30CFR, Part 19.

**Intertek**  
 ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T13C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27838X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0025X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**CE** 0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5458G | 80158 4     |



## SPECIFICATIONS

- Lumens: spotlight-130, high white floodlight-100, low white floodlight-25, green floodlight-21, Dual-Light-190
- Run-time: spotlight-14 hrs, high white floodlight-12.5 hrs, low white floodlight-70 hrs, green floodlight-37 hrs, Dual-Light-6 hrs
- Beam distance: 120 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

| FL 1 STANDARD | DUAL-LIGHT           | SPOTLIGHT            |
|---------------|----------------------|----------------------|
|               | <b>190</b><br>LUMENS | <b>130</b><br>LUMENS |
|               | <b>6h</b>            | <b>14h</b>           |
|               | <b>132m</b>          | <b>120m</b>          |
|               | <b>3500cd</b>        | <b>3500cd</b>        |
|               | <b>2m</b>            |                      |
|               | <b>1m</b>            |                      |

## INCLUDED

- Headlamp
- 3 AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light



This XPP-5570G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Non-Rechargeable Batteries is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570G has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570G utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570G can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.



**INTRINSICALLY SAFE  
PERMISSIBLE**

**200** Flashlight Lumens  
**200** Floodlight Lumens  
**200** Dual-Light™ Lumens



**XPP-5570G**

- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Beam distance rated at 267 meters
- Meets the requirements for NFPA-1971-8.6 (2013)

XPP-5570G



# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight




Heavy-duty stainless-steel pocket clip

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-21 hrs, medium-42 hrs, low-84 hrs, floodlight high-21 hrs, medium-42 hrs, survival-84 hrs, dual-light-21 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 16.9 oz

| FL 1 STANDARD | DUAL-LIGHT           | HIGH                 | MEDIUM               | LOW                 |
|---------------|----------------------|----------------------|----------------------|---------------------|
|               | <b>200</b><br>LUMENS | <b>200</b><br>LUMENS | <b>100</b><br>LUMENS | <b>60</b><br>LUMENS |
|               | <b>21h</b>           | <b>21h</b>           | <b>42h</b>           | <b>84h</b>          |
|               | <b>235m</b>          | <b>267m</b>          | <b>199m</b>          | <b>145m</b>         |
|               | <b>13836cd</b>       | <b>22249cd</b>       | <b>14828cd</b>       | <b>7790cd</b>       |



## INCLUDED

- Light
- AA Battery Carrier
- 6 AA batteries



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5570G | 80455 4     |

Permissible Nightstick XPP-5570 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex is FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**cULus**  
LISTED  
E 467750  
CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light Rechargeable



This Rechargeable XPR-5572G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572G has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572G utilizes Nightstick's exclusive Dual-Light mode...the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight Lumens  
**200** Floodlight Lumens  
**200** Dual-Light™ Lumens



**XPR-5572G**



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position

XPR-5572G



# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip




Wall or vehicle mounted charger

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 13.7oz

| FL 1 STANDARD | DUAL-LIGHT           | HIGH                 | MEDIUM               | LOW                 |
|---------------|----------------------|----------------------|----------------------|---------------------|
|               | <b>200</b><br>LUMENS | <b>200</b><br>LUMENS | <b>100</b><br>LUMENS | <b>60</b><br>LUMENS |
|               | <b>8h</b>            | <b>6h</b>            | <b>11h</b>           | <b>22h</b>          |
|               | <b>235m</b>          | <b>267m</b>          | <b>199m</b>          | <b>145m</b>         |
|               | <b>13836cd</b>       | <b>22249cd</b>       | <b>14828cd</b>       | <b>7790cd</b>       |



## INCLUDED

- Light
- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPR-5572G | 80457 8     |

Permissible Nightstick XPR-5572 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex is FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**cULus**  
LISTED  
E 467750  
CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light

This XPP-5570R Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Non-Rechargeable Batteries is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570R has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570R utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570R can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight Lumens  
**200** Floodlight Lumens  
**200** Dual-Light™ Lumens



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Beam distance rated at 267 meters
- Meets the requirements for NFPA-1971-8.6 (2013)



**XPP-5570R**

XPP-5570R



# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-21 hrs, medium-42 hrs, low-84 hrs, floodlight high-21 hrs, medium-42 hrs, survival-84 hrs, dual-light-21 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 16.9 oz

| FL1 STANDARD | DUAL-LIGHT | HIGH       | MEDIUM     | LOW       |
|--------------|------------|------------|------------|-----------|
|              | 200 LUMENS | 200 LUMENS | 100 LUMENS | 60 LUMENS |
|              | 21h        | 21h        | 42h        | 84h       |
|              | 235m       | 267m       | 199m       | 145m      |
|              | 13836cd    | 22249cd    | 14828cd    | 7790cd    |
|              | 2m         |            |            |           |
|              | 1m         |            |            |           |

## INCLUDED

- AA Battery Carrier
- 6 AA batteries



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPP-5570R | 80456 1     |

Permissible Nightstick XPP-5570 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
 CLASS II & III DIV I GRPS E-G  
 CLASS I ZONE 0 Group IIC T3  
 CLASS II ZONE 20 Group IIIC T3  
 -20°C ≤ Tamb ≤ +70°C

**UL** LISTED E 467750 CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light Rechargeable

This Rechargeable XPR-5572R Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572R has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572R utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position



**XPR-5572R**



XPR-5572R





# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charger

Permissible Nightstick XPR-5572 Flashlight/Floodlight  
**MSHA** APPROVAL No. 20-A150005-0  
 TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY  
**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS  
 UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.  
 CLASS I DIV I GRPS A-D T3  
 CLASS II & III DIV I GRPS E-G  
 CLASS I ZONE 0 Group IIC T3  
 CLASS II ZONE 20 Group IIIC T3  
 -20°C ≤ Tamb ≤ +70°C

**UL** LISTED E 467750  
**CE** 0359

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 13.7oz

| FL1 STANDARD | DUAL-LIGHT | HIGH       | MEDIUM     | LOW       |
|--------------|------------|------------|------------|-----------|
|              | 200 LUMENS | 200 LUMENS | 100 LUMENS | 60 LUMENS |
|              | 8h         | 6h         | 11h        | 22h       |
|              | 235m       | 267m       | 199m       | 145m      |
|              | 13836cd    | 22249cd    | 14828cd    | 7790cd    |
|              | 2m         |            |            |           |
|              | 1m         |            |            |           |

## INCLUDED

- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

| Model     | UPC 0 17398 |
|-----------|-------------|
| XPR-5572R | 80458 5     |

**Intrinsically Safe Permissible**

**Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base - Rechargeable**

This Rechargeable XPR-5572RM Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572RM had two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Plus, the 5572RM utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. The included Multi-Angle Magnetic Base allows the light to slide and lock into place giving it an additional level of functionality. The powerful Rare-earth Magnet with its rubber protective covering attaches to virtually any ferrous metal surface. The single point locking lever can be used in conjunction with the gimbal head to focus the light exactly where it's needed. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight Lumens  
**200** Floodlight Lumens  
**200** Dual-Light™ Lumens



TECHNOLOGY



**XPR-5572RM**



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- Includes Multi-Angle Magnetic Base
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position

# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head
- Waterproof
- Impact & chemical resistant
- Light (w/o magnetic base) meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charger

Permissible Nightstick XPR-5572 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0  
TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

**UL** LISTED E 467750 0359

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV 1 GRPS A-D T3  
CLASS II & III DIV 1 GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIC T3  
-20°C ≤ Tamb ≤ +70°C



Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 24.9oz w/ magnetic base

| FL1 STANDARD | DUAL-LIGHT | HIGH       | MEDIUM     | LOW       |
|--------------|------------|------------|------------|-----------|
|              | 200 LUMENS | 200 LUMENS | 100 LUMENS | 60 LUMENS |
|              | 8h         | 6h         | 11h        | 22h       |
|              | 235m       | 267m       | 199m       | 145m      |
|              | 13836cd    | 22249cd    | 14828cd    | 7790cd    |
|              | 2m         |            |            |           |
|              | 1m         |            |            |           |

## INCLUDED

- Angle Magnetic Base
- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies

| Model      | UPC 0 17398 |
|------------|-------------|
| XPR-5572RM | 80466 0     |



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

XPR-5572RM



# Safety Lights

## Safety Light/Flashlights



Each Safety Light combines a full-size flashlight and a floodlight/flushing safety light in a compact, light-weight package. Two body mounted switches control the lighting functions. The top button powers the tight-beam, long-throw 150 lumens flashlight in either momentary or constant-on mode. The bottom button controls the safety light array with options for constant-on or flashing/alternating (depending on model) operation. Power comes from 4 AA batteries (included).

**150** Flashlight Lumens

**120** Safety Light Lumens

- Constant-on or flashing safety light
- Long-throw flashlight beam
- Long run-times
- Powered by 4 AA batteries (included)



Safety Lights



NSP-1162



NSP-1164



NSP-1166



NSP-1168




NSP-1170



NSP-1172



NSP-1174



NSP-1176



NSP-1178



NSP-1180



## Safety Lights

### FEATURES: ALL MODELS


- Flashlight with CREE® LED technology – 50,000 + hours LED life
- Floodlight/safety light with premium LED technology – 35,000 + hours LED life
- Momentary or constant-on white flashlight (all models)
- High/low-brightness single color floodlight or flashing safety light (1162, 1164, 1166 & 1168)
- Dual-color floodlight or alternating safety light (1170, 1172, 1176, 1178 & 1180)
- White floodlight or flashing amber safety light (1174)
- Sharp focused beam flashlight
- Wide-beam unfocused floodlight/safety light
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by 4 premium AA alkaline batteries (included)
- 1 Year Limited Warranty\*

### SPECIFICATIONS

- Lumens: flashlight-150, floodlight/safety light-120
- Run-time: flashlight-10 hrs, floodlight/safety light-model dependent (see chart)
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, diameter: 1.3 x .9in, weight: 8.2oz

### INCLUDED

- Safety light/flashlight
- 4 Premium AA alkaline batteries
- Magnetic clip
- Lanyard ring



High-efficiency deep parabolic reflector



Momentary or constant-on flashlight



Constant-on or flashing safety light (NSP-1170 Shown)

### MODELS/ACCESSORIES

| MODELS       |                    |                                  |                                      |                                      |             |
|--------------|--------------------|----------------------------------|--------------------------------------|--------------------------------------|-------------|
| Model        | Safety Light Color | Safety Light Functions           | Constant Safety Light Run-Time Hours | Flashing Safety Light Run-Time Hours | UPC 0 17398 |
| NSP-1162     | Red                | Constant - half power - flashing | 4 full power<br>8 half power         | 16                                   | 80102 7     |
| NSP-1164     | Blue               | Constant - half power - flashing | 4 full power<br>8 half power         | 16                                   | 80103 4     |
| NSP-1166     | White              | Constant - half power - flashing | 4 full power<br>8 half power         | 16                                   | 80104 1     |
| NSP-1168     | Amber              | Constant - half power - flashing | 4 full power<br>8 half power         | 16                                   | 80105 8     |
| NSP-1170     | Blue & Red         | Constant or alternating flash    | 4 full power                         | 16<br>alternating flasher            | 80106 5     |
| NSP-1172     | White & Red        | Constant or alternating flash    | 4 full power                         | 16<br>alternating flasher            | 80107 2     |
| NSP-1174     | White & Amber      | Constant white - flashing amber  | 30 led<br>floodlight = 8             | 24                                   | 80119 5     |
| NSP-1174-K01 | White & Amber      | Constant white - flashing amber  | 30 led<br>floodlight = 8             | 24                                   | 80125 6     |
| NSP-1176     | White & Amber      | Constant or alternating flash    | 4 full power                         | 16<br>alternating flasher            | 80114 0     |
| NSP-1178     | White & Blue       | Constant or alternating flash    | 4 full power                         | 16<br>alternating flasher            | 80138 6     |
| NSP-1180     | Amber & Green      | Constant or alternating flash    | 4 constant<br>amber / green          | 16<br>alternating flasher            | 80207 9     |



Safety cones



Large magnetic base



Magnetic stand



Magnetic clip



NSP-1174-K01



Impact bumpers

| Model        | Description         | UPC 0 17398 |
|--------------|---------------------|-------------|
| 1260-RCONE   | Red cone            | 80085 3     |
| 1260-YCONE   | Yellow cone         | 80086 0     |
| 1160-MSTAND  | Magnet stand        | 80101 0     |
| 1160-BASE    | Large magnetic base | 80026 6     |
| 1160-MAGNET  | Magnetic clip       | 80084 6     |
| 1260-BUMPERS | Impact bumpers      | 80135 5     |

# Rechargeable Safety Lights

## Safety Light/Flashlights Rechargeable



Nightstick Rechargeable Safety Light Flashlights combine a full-size flashlight and a flood/flashing safety light in an all LED compact lightweight package. Two body-mounted push buttons control the lighting functions. The top button powers the tight-beam, long-throw flashlight in either momentary or constant-on mode and the bottom button controls the safety light. Pressing the bottom button once turns on both sets of the colored safety lights at full power. Pressing the button a second time, causes the colored safety lights to alternately strobe between the two colors. Powered by a rechargeable Li-ion battery.

**150** Flashlight  
Lumens

**50** Safety Light  
Lumens

- Constant-on or flashing safety light
- Long-throw flashlight beam
- Long run-times
- Powered by rechargeable Li-ion battery



NSR-2070



NSR-2072



NSR-2078



Safety Lights



# Rechargeable Safety Lights

## FEATURES: ALL MODELS


- Flashlight with CREE® LED technology – 50,000 + hours LED life
- Floodlight/safety light with premium LED technology – 35,000 + hours LED life
- Has both a tight-beam long-throw flashlight and a wide-angle two colored flashing safety light array
- Lighting modes: momentary and constant-on flashlight, full-power safety light, alternating color flashing safety light & dual-light (both the flashlight & safety light array at the same time)
- Two button design top: flashlight, bottom: safety light
- Light weight and durable
- Sharp focused beam flashlight
- Wide-beam unfocused floodlight/safety light
- Engineered polymer housing
- Non-slip grip
- Oval shape with textured body and soft-touch finish feels great in your hand
- Water resistant
- Impact & chemical resistant
- Powered by a rechargeable Li-ion battery
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-150, floodlight/safety light-50
- Run-time: flashlight-7.5 hrs, floodlight-4 hrs, safety light-6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 11.625in, diameter: 1.5 x 1.125, weight: 6.8oz

## INCLUDED

- Safety light/flashlight
- AC/DC power supplies



High-efficiency deep parabolic reflector



Momentary or constant-on flashlight



Constant-on or flashing safety light (NSP-2070 Shown)

## MODELS/ACCESSORIES

| Model        | Description         | UPC 0 17398 |
|--------------|---------------------|-------------|
| 1260-RCONE   | Red cone            | 80085 3     |
| 1260-YCONE   | Yellow cone         | 80086 0     |
| 1160-MSTAND  | Magnet stand        | 80101 0     |
| 1160-BASE    | Large magnetic base | 80026 6     |
| 1160-MAGNET  | Magnetic clip       | 80084 6     |
| 1260-BUMPERS | Impact bumpers      | 80135 5     |



Safety cones



Large magnetic base



Magnetic stand



Magnetic clip



NSP-1174-K01



Impact bumpers

# LED Traffic Wands

## Traffic Wands



Nightstick LED Traffic Wands feature a bright lumen output with a red, blue, or yellow cone and a black-formed handle for ultimate grip and comfort. One body mounted push button controls the On/Strobe/Off lighting functions. Pressing the button once, turns the light on constant-on mode, pressing the button a second time causes the light to strobe, and a third press of the button turns the light off. Power comes from 3 premium AAA batteries (included). The lightweight Nightstick LED Traffic Wands are ideal for daylight or night applications and are the perfect choice for air ground crews, directing traffic, or marking a potentially hazardous area.

- **Bright lumen output with a colored cone**
- **Lightweight durable construction**
- **Long run-time**
- **Waterproof**
- **Powered by 3 AAA batteries (included)**



NSP-1632

NSP-1634

NSP-1636





# LED Traffic Wands

## FEATURES: ALL MODELS

- Bright light for daylight or night use
- On/Strobe/Off functionality
- Single push button switch located on body for all modes
- IP-X7 Waterproof
- Lightweight for long use
- Light weight and durable
- Impact & chemical resistant
- Non-slip grip
- Powered by 3 AAA batteries (included)
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Constant-on run-time - 8 hrs.
- Strobe run-time - 27 hrs.
- Water rating - IP-X7 Waterproof
- Drop rating: 2 meters
- Length: 16.5in, diameter: 1.575in, weight: 5.3oz



## INCLUDED

- LED Traffic Wand
- 3 - AAA Batteries



| Model    | UPC 0 17398 |
|----------|-------------|
| NSP-1632 | 80501 8     |
| NSP-1634 | 80502 5     |
| NSP-1636 | 80503 2     |

## Feature Overview

|                           | MINI-TAC |        |        |        |        |        |        |        |        | UV      |         | TACTICAL |         |          |         |           |         |
|---------------------------|----------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|----------|---------|----------|---------|-----------|---------|
|                           | MT-100   | MT-110 | MT-120 | MT-130 | MT-140 | MT-200 | MT-210 | MT-220 | MT-230 | MTU-106 | MTU-136 | FDL-300R | TAC-300 | TAC310XL | TAC-350 | TAC-360XL | TAC-400 |
| ANSI FL1                  | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       | ●        | ●       | ●        | ●       | ●         | ●       |
| Flash/Flood/Dual-Light™   |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           |         |
| Multi-Function            |          |        |        |        |        | ●      | ●      | ●      | ●      |         |         |          |         |          |         |           |         |
| Strobe Mode               |          |        |        |        |        | ●      | ●      | ●      |        |         |         |          |         |          |         |           |         |
| Rechargeable Battery Pack |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           | Li      |
| Alkaline Batteries        | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       |          |         |          |         |           |         |
| Lithium CR-123            |          |        |        |        |        |        |        |        |        |         |         | ●        | ●       | ●        | ●       | ●         |         |
| Metal Housing             | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       |          |         |          | ●       | ●         |         |
| Polymer Housing           |          |        |        |        |        |        |        |        |        |         |         | ●        | ●       | ●        |         |           | ●       |
| Soft-Touch Finishing      |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           |         |
| Waterproof                |          |        |        |        |        | ●      | ●      | ●      | ●      |         |         | ●        | ●       | ●        | ●       | ●         | ●       |
| Water Resistant           | ●        | ●      | ●      | ●      | ●      |        |        |        |        | ●       | ●       |          |         |          |         |           |         |
| Chemical Resistant        | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       | ●        | ●       | ●        | ●       | ●         | ●       |
| Single Button             |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           |         |
| Two Button                |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           |         |
| Tail-Cap Switch           | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       | ●        | ●       | ●        | ●       | ●         | ●       |
| Limited Lifetime Warranty | ●        | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●      | ●       | ●       | ●        | ●       | ●        | ●       | ●         | ●       |
| Limited 1 Year Warranty   |          |        |        |        |        |        |        |        |        |         |         |          |         |          |         |           |         |

# Feature Overview

## TACTICAL

TACTICAL  
DUAL-LIGHT  
FLASHLIGHT

AREA  
LIGHTS

HELMET  
MOUNTED  
LIGHT KIT

## DUTY/PERSONAL-SIZE

| TAC-410XL | TAC-450 | TAC-460XL | TAC-500 | TAC-510XL | TAC-540XL       | TAC-550 | TAC-560XL | NSP-9842XL | NSR-9844XL | NSR-1514 | NSR-1514C | NSP-4650 | NSR-9514XL | NSR-9514Y | NSR-9614XL | NSR-9920XL | NSR-9924XL | NSR-9940XL | NSR-9944XL |
|-----------|---------|-----------|---------|-----------|-----------------|---------|-----------|------------|------------|----------|-----------|----------|------------|-----------|------------|------------|------------|------------|------------|
| •         | •       | •         | •       | •         | •               | •       | •         | •          | •          |          |           | •        | •          | •         | •          | •          | •          | •          | •          |
|           |         |           |         |           |                 |         |           | •          | •          |          |           | •        |            |           |            | •          | •          | •          | •          |
|           |         |           | •       | •         | •               | •       | •         | •          | •          | •        | •         | •        | •          | •         | •          | •          | •          | •          | •          |
|           |         |           | •       | •         | •               | •       | •         | •          | •          |          |           | •        | •          | •         | •          | •          | •          | •          | •          |
| Li        | Li      | Li        | Li      | Li        | Li <sup>+</sup> | Li      | Li        |            | Li         | Li       | Li        |          | Li         | Li        | Li         | Li         | Li         | Li         | Li         |
|           |         |           |         |           |                 |         |           |            |            |          |           |          |            |           |            |            |            |            |            |
|           |         |           |         |           | •               |         |           | •          |            |          |           | •        |            |           |            |            |            |            |            |
|           | •       | •         |         |           | •               | •       | •         | •          | •          | •        | •         | •        |            |           | •          |            |            | •          | •          |
| •         |         |           | •       | •         |                 |         |           |            |            |          |           |          | •          | •         |            | •          | •          |            |            |
|           |         |           |         |           |                 |         |           |            |            |          |           |          |            |           |            |            |            |            | •          |
| •         | •       | •         | •       | •         | •               | •       | •         | •          | •          | •        | •         | •        | •          | •         | •          | •          | •          | •          | •          |
|           |         |           |         |           |                 |         |           |            |            |          |           |          |            |           |            |            |            |            |            |
| •         | •       | •         | •       | •         | •               | •       | •         | •          | •          | •        | •         | •        | •          | •         | •          | •          | •          | •          | •          |
|           |         |           |         |           |                 |         |           | •          | •          | •        | •         |          | •          | •         | •          |            |            |            |            |
|           |         |           |         |           |                 |         |           |            |            |          |           | •        |            |           |            | •          | •          | •          | •          |
| •         | •       | •         | •       | •         | •               | •       | •         | •          | •          |          |           |          | •          |           | •          |            | •          |            | •          |
| •         | •       | •         | •       | •         | •               | •       | •         | •          | •          |          |           | •        | •          | •         | •          | •          | •          | •          | •          |
|           |         |           |         |           |                 |         |           |            |            | •        | •         |          |            |           |            |            |            |            |            |

## Feature Overview

### FULL-SIZE

### MULTI-PURPOSE

### HEADLAMPS

|                           | NSR-9744XL | NSR-9746XL | NSP-1206 | NSP-1224 | NSP-1260 | NSP-1400 | NSP-1402 | NSP-1404 | NSP-2422 | NSR-2492 | SLR & NSR-2166 | NSR-2168 | SLR-2120 | SLR-2124 | NSR-2522RM | NSP-4602B | NSP-4603B | NSP-4604B | NSP-4605B |
|---------------------------|------------|------------|----------|----------|----------|----------|----------|----------|----------|----------|----------------|----------|----------|----------|------------|-----------|-----------|-----------|-----------|
| ANSI FL1                  | ●          | ●          | ●        | ●        |          | ●        | ●        | ●        | ●        | ●        |                | ●        |          |          | ●          | ●         | ●         | ●         | ●         |
| Flash/Flood Dual-Light™   | ●          |            | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●        | Spot Flood     | ●        |          |          | ●          | ●         |           | ●         |           |
| Multi-Function            | ●          | ●          |          |          | ●        |          |          |          |          |          |                |          |          | ●        |            |           | ●         |           | ●         |
| Strobe Mode               | ●          | ●          |          |          |          |          |          |          |          |          |                |          |          | ●        |            |           |           |           |           |
| Rechargeable Battery Pack | Li         | Li         |          |          |          |          |          |          |          | NiMH     | NiMH           | Li       | Li       | Li       | Li         |           |           |           |           |
| Alkaline Batteries        |            |            | ●        | ●        | ●        | ●        | ●        | ●        | ●        |          |                |          |          |          |            | ●         | ●         | ●         | ●         |
| Lithium CR-123            |            |            |          |          |          |          |          |          |          |          |                |          |          |          |            |           |           |           |           |
| Metal Housing             | ●          | ●          |          |          |          |          |          |          |          |          |                |          |          |          |            |           |           |           |           |
| Polymer Housing           |            |            | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●              | ●        | ●        | ●        | ●          | ●         | ●         | ●         | ●         |
| Soft-Touch Finishing      |            |            | ●        | ●        | ●        | ●        | ●        | ●        |          |          |                | ●        |          |          |            | ●         | ●         | ●         | ●         |
| Waterproof                | ●          | ●          |          |          |          |          |          |          | ●        |          |                |          |          |          | ●          | ●         | ●         | ●         | ●         |
| Water Resistant           |            |            | ●        | ●        | ●        | ●        | ●        | ●        |          | ●        | ●              | ●        | ●        | ●        |            |           |           |           |           |
| Chemical Resistant        | ●          | ●          | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●              | ●        | ●        | ●        | ●          | ●         | ●         | ●         | ●         |
| Single Button             |            | ●          | ●        | ●        |          |          |          |          |          |          | ●              | ●        |          |          |            | ●         | ●         | ●         | ●         |
| Two Button                | ●          |            |          |          | ●        | ●        | ●        | ●        | ●        | ●        |                |          | ●        | ●        | ●          |           |           |           |           |
| Tail-Cap Switch           |            |            |          |          |          |          |          |          |          |          |                |          |          |          |            |           |           |           |           |
| Limited Lifetime Warranty | ●          | ●          |          |          |          |          |          |          |          |          |                |          |          |          | ●          |           |           |           |           |
| Limited 1 Year Warranty   |            |            | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●        | ●              | ●        | ●        | ●        |            | ●         | ●         | ●         | ●         |

# Feature Overview

## HEADLAMPS

## INTRINSICALLY SAFE

SAFETY LIGHTS    TRAFFIC WANDS

| NSP-4606B | NSP-4608 | NSP-4610   | NSP-4612 | NSP-4614B | NSP-4616B | XPP-5410 | XPP-5412 | XPP-5420 | XPP-5422 | XPP-5422GM | XPP-5450 | XPP-5452 | XPP-5454 | XPP-5456 | XPP-5458 | XPP-5570 | XPR-5572 | NSP-1162-1180 | NSR-2070-2078 | NSP-1632-1636 |   |
|-----------|----------|------------|----------|-----------|-----------|----------|----------|----------|----------|------------|----------|----------|----------|----------|----------|----------|----------|---------------|---------------|---------------|---|
| •         | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        | •        | •             | •             |               |   |
| •         | •        | Spot Flood | •        | •         | •         |          |          |          | •        | •          |          |          | •        | •        | •        | •        | •        | •             | •             |               |   |
|           | •        | •          | •        | •         | •         |          |          |          |          |            |          |          | •        | •        | •        | •        | •        |               | •             |               |   |
|           |          |            |          |           |           |          |          |          |          |            |          |          |          |          |          |          |          | •             | •             | •             |   |
|           |          |            |          |           |           |          |          |          |          |            |          |          |          |          |          |          | •        |               | Li            |               |   |
| •         | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        |          |               | •             | •             | • |
|           |          |            |          |           |           |          |          |          |          |            |          |          |          |          |          |          |          |               |               |               |   |
| •         | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        | •        | •             | •             | •             | • |
| •         | •        | •          | •        |           |           |          |          |          |          |            |          |          |          |          |          |          |          |               | •             | •             | • |
| •         | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        | •        | •             |               |               | • |
|           |          |            |          |           |           |          |          |          |          |            |          |          |          |          |          |          |          |               | •             | •             |   |
| •         | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        | •        | •             | •             | •             | • |
| •         |          |            |          |           |           |          |          | •        |          |            | •        | •        |          |          |          |          |          |               |               |               | • |
|           | •        | •          | •        | •         | •         |          |          |          | •        | •          |          |          | •        | •        | •        | •        | •        | •             | •             | •             |   |
|           |          |            |          |           |           | •        | •        |          |          |            |          |          |          |          |          |          |          |               |               |               |   |
|           | •        | •          | •        | •         | •         | •        | •        | •        | •        | •          | •        | •        | •        | •        | •        | •        | •        | •             |               |               |   |
| •         |          |            |          |           |           |          |          |          |          |            |          |          |          |          |          |          |          |               | •             | •             | • |

## Accessories

|        |           |           |           |        |        |      |      |      |      |      |        |      |      |               |
|--------|-----------|-----------|-----------|--------|--------|------|------|------|------|------|--------|------|------|---------------|
| MT-110 | FDL-300   | TAC-400   | TAC-500   | 9514   | 9744XL | 1162 | 2070 | 1206 | 1260 | 1400 | 2422   | 2166 | 5450 | UPC<br>017398 |
| MT-120 | TAC-300   | TAC-410XL | TAC-510XL | 9614   | 9746XL | 1164 | 2072 | 1224 |      | 1402 | 2522RM |      | 5452 |               |
| MT-210 | TAC-310XL | TAC-450   | TAC-540XL | 9920XL |        | 1166 | 2074 |      |      | 1404 |        |      | 5454 |               |
| MT-220 | TAC-350   | TAC-460XL | TAC-550   | 9924XL |        | 1168 | 2078 |      |      |      |        |      | 5456 |               |
| MT-230 | TAC-360XL |           | TAC-560XL | 9940XL |        | 1170 |      |      |      |      |        |      | 5458 |               |
|        |           |           |           | 9944XL |        | 1172 |      |      |      |      |        |      |      |               |

### CONES

|            |                      |  |   |   |   |   |        |   |   |   |  |  |  |         |
|------------|----------------------|--|---|---|---|---|--------|---|---|---|--|--|--|---------|
| 200-RCONE  | Red safety cone      |  | X | X | X |   |        |   |   |   |  |  |  | 80131 7 |
| 200-YCONE  | Yellow safety cone   |  | X | X | X |   |        |   |   |   |  |  |  | 80132 4 |
| 300-FILTER | TAC Light Filter Set |  | X | X | X |   |        |   |   |   |  |  |  |         |
| 1200-RCONE | Red safety cone      |  |   |   |   |   |        | X |   | X |  |  |  | 70002 3 |
| 1200-YCONE | Yellow safety cone   |  |   |   |   |   |        | X |   | X |  |  |  | 70001 6 |
| 1260-RCONE | Red safety cone      |  |   |   |   |   | X      |   | X |   |  |  |  | 80085 3 |
| 1260-YCONE | Yellow safety cone   |  |   |   |   |   | X      |   | X |   |  |  |  | 80086 0 |
| 9600-RCONE | Red safety cone      |  |   |   |   | X |        |   |   |   |  |  |  | 80226 0 |
| 9600-YCONE | Yellow safety cone   |  |   |   |   | X | 9744XL |   |   |   |  |  |  | 80228 4 |
| 9600-BCONE | Blue safety cone     |  |   |   |   | X | 9744XL |   |   |   |  |  |  | 80223 9 |
| 9700-RCONE | Red safety cone      |  |   |   |   |   | 9746XL |   |   |   |  |  |  | 80313 7 |
| 9700-YCONE | Yellow safety cone   |  |   |   |   |   | 9746XL |   |   |   |  |  |  | 80314 4 |
| 9700-BCONE | Blue safety cone     |  |   |   |   |   | 9746XL |   |   |   |  |  |  | 80315 1 |

### HOLSTER / BELT RINGS

|              |                                |   |   |   |   |   |        |   |  |  |   |  |      |         |
|--------------|--------------------------------|---|---|---|---|---|--------|---|--|--|---|--|------|---------|
| MT-HOLSTER1  | Belt holster                   | X |   |   |   |   |        |   |  |  |   |  | 5410 | 80464 6 |
| 200-HOLSTER  | Belt holster                   |   | X | X | X |   |        |   |  |  |   |  |      | 80233 8 |
| 300-HOLSTER  | Belt holster                   |   | X | X | X |   |        |   |  |  |   |  |      | 80454 7 |
| 1200-HOLSTER | Belt holster                   |   |   |   |   |   |        | X |  |  |   |  |      | 70003 0 |
| 5420-HOLSTER | Belt holster                   |   |   |   |   |   |        |   |  |  | X |  | X    | 80234 5 |
| 9850-BRBW    | Basket weave leather belt ring |   |   |   |   |   | 9746XL |   |  |  |   |  |      | 98501 7 |
| 9850-BRBW    | Nylon belt ring                |   |   |   |   |   | 9746XL |   |  |  |   |  |      | 98502 4 |
| 9850-BRPL    | Patent leather belt ring       |   |   |   |   |   | 9746XL |   |  |  |   |  |      | 98503 1 |
| 9850-BRSL    | Standard leather belt ring     |   |   |   |   |   | 9746XL |   |  |  |   |  |      | 98504 8 |
| NS-BR1       | Nylon belt ring                |   |   |   |   | X | X      |   |  |  |   |  |      |         |



# Accessories

|                      |   | FDL-300<br>TAC-300<br>TAC-310XL<br>TAC-350<br>TAC-360XL | TAC-400<br>TAC-500<br>TAC-450<br>TAC-550 | TAC-410XL<br>TAC-510XL<br>TAC-540XL<br>TAC-560XL<br>TAC-560XL | 9512<br>9514<br>9612<br>9614<br>9920XL<br>9924XL<br>9940XL<br>9944XL | 9744XL<br>9746 | 1162<br>1164<br>1166<br>1168<br>1170<br>1172<br>1174<br>1176<br>1178<br>1180 | 1206<br>1224 | 1260 | 1400<br>1402<br>1404 | 2422 | 2166 | 5450<br>5452<br>5454<br>5456<br>5458 | UPC<br>017398 |
|----------------------|---|---|--|---|--|----------------|--|--------------|------|----------------------|------|------|--------------------------------------|---------------|
| <b>MISCELLANEOUS</b> |   |   |  |   |  |                |  |              |      |                      |      |      |                                      |               |
| 1160-MSTAND          | Magnetic stand  |   |  |   |  |                | X  |              | X    |                      |      |      |                                      | 80101 0       |
| 1160-BASE            | Large magnetic stand  |   |  |   |  |                | X  |              | X    |                      |      |      |                                      | 80026 6       |
| 1200-CLIP            | Pocket clip   |   |  |   |  |                |  | X            |      | X                    |      |      |                                      | 70005 4       |
| 1200-FILTER          | Red & green attachable filters  |   |  |   |  |                |  | X            |      | X                    |      |      |                                      | 70006 1       |
| 1200-MAGNET          | Clip-on magnet  |   |  |   |  |                |  | X            |      | X                    |      |      |                                      | 70004 7       |
| 1160-MAGNET          | Magnetic clip   |   |  |   |  |                | X  |              | X    |                      |      |      |                                      | 80084 3       |
| 400B-SS              | tail cap side switch  | X   | X  |   |  |                |  |              |      |                      |      |      |                                      | 80141 6       |
| 400B-RPS             | Black remote pressure switch<br>- 6 inch cord   | X   | X  | X   |  |                |  |              |      |                      |      |      |                                      | 80130 0       |
| CR-123-10            | CR-123 lithium battery (10 pk)  | X   | X  | X   |  |                |  |              |      |                      |      |      |                                      | 80112 6       |
| 1260-BUMPERS         | Pair of black impact<br>protection bumpers  |   |  |   |  |                | X  |              | X    |                      |      |      |                                      | 80135 5       |
| 2166-HOOK            | Replacement hook  |   |  |   |  |                |  |              |      |                      |      | X    |                                      | 80050 1       |
| <b>BATTERIES</b>     |   |   |  |   |  |                |  |              |      |                      |      |      |                                      |               |
| 400-BATT             | Lithium-ion rechargeable<br>battery   |   | X  |   |  |                |  |              |      |                      |      |      |                                      | 80144 7       |
| 560-BATT             | Lithium-ion rechargeable<br>battery   |   |  | X   |  |                |  |              |      |                      |      |      |                                      | 80581 6       |
| 500-CARRIER          | CR-123 battery carrier.<br>Converts TAC-500 series<br>flashlights from rechargeable<br>to disposable CR-123 lithium |   | X  | X   |  |                |  |              |      |                      |      |      |                                      | 80311 3       |
| 9600-BATT            | Lithium-ion rechargeable<br>battery   |   |  |   | X  |                |  |              |      |                      |      |      |                                      | 80222 2       |
| 9700-BATT            | Lithium-ion rechargeable<br>battery   |   |  |   |  | X              |  |              |      |                      |      |      |                                      | 80312 0       |
| <b>CHARGERS</b>      |   |   |  |   |  |                |  |              |      |                      |      |      |                                      |               |
| 400-CHGR1            | Charger for TAC-400 & TAC-<br>500 series flashlights  |   | X  | X   |  |                |  |              |      |                      |      |      |                                      | 80142 3       |
| 9000-CHGR1           | Charger for 9500, 9600,<br>9700 & 9900 series<br>(no power cords)   |   |  |   | X  | X              |  |              |      |                      |      |      |                                      | 80472 1       |
| 9000-CHGR5           | Charge up to five 9500,<br>9600, 9700 & 9900 series<br>flashlights at once  |   |  |   | X  | X              |  |              |      |                      |      |      |                                      | 80475 2       |
| 9600-USB             | USB charging cord- 27in<br>(0.68m)  |   |  |   | X  | X              |  |              |      |                      |      |      |                                      | 80227 7       |
| 9914-ACCORD          | AC charging cord for US,<br>UK, Australia, Canada and<br>Europe   |   | X  | X   | X  | X              |  |              |      |                      |      |      |                                      | 81046 3       |
| 9914-DCORD           | 12V DC charging cord<br>(cigarette lighter connector) –<br>temporary charging power<br>from a vehicle               |   | X  | X   | X  | X              |  |              |      |                      |      |      |                                      | 81047 0       |
| 9914-DW              | 12V DC direct wiring kit for<br>automobile installation –<br>permanent charging power<br>from a vehicle             |   | X  | X   | X  | X              |  |              |      |                      |      |      |                                      | 80044 0       |

## ANSI FL-1



NSR-9614XL

### Compare Flashlight Performance at a Glance

- ❖ Prior to the ANSI/PLATO FL-1 standards there were no standardized tests or uniform rating systems to objectively evaluate flashlight performance.
- ❖ ANSI/PLATO FL-1 standard allows consumers to compare the technical performance of flashlights using an easy to understand icon format.
- ❖ Manufacturers of flashlights voluntarily invest in the effort and technology necessary to measure their flashlights performance.

## Understanding ANSI / PLATO FL-1 Icons

|   |  |  |
|---|--|--|
| How much light is available?                |  | <b>Light Output</b><br>Total light output measured in Lumens. Lumens have become the most commonly used unit of measure for total light output in portable lighting devices.   |
| How far will the beam throw?                |  | <b>Beam Distance</b><br>The distance, measured in meters, at which the light projects a useful amount of light, measured at 0.25 lux. (0.25 lux is approximately the equivalent of light emitted from a full moon "on a clear night in an open field.")  |
| How bright is the light?                    |  | <b>Peak Beam Intensity</b><br>The brightest point in the beam measured in candela. Candela is the modern unit of measure for light intensity replacing the now-obsolete unit known as candlepower.   |
| How long can I operate the light?           |  | <b>Run-Time</b><br>Tested with fresh batteries from 30 seconds after the light is turned on until the light output reaches 10% of the initial measurement. This is the total time of useable light before most consumers will change batteries.  |
| What drop distance will the light survive?  |  | <b>Impact Resistance</b><br>The height, measured in meters, from which the light can be dropped onto cured concrete and still work properly. This testing is completed by dropping the product (6) times using drop orientations that approximate each side of a cube. Dropped samples cannot have any visible cracks or breaks and must remain fully functional. The product must meet a minimum of (1) meter to receive this rating. |
| How well is the light protected from water? |  | <b>Water Resistance</b><br>This icon indicates an IPX4 rating which means the sample is tested against water sprayed from all angles. If this test is performed, it must be done after impact resistance testing is completed to ensure water resistance under real-life conditions.   |
|   |  | <b>Water Proof</b><br>Water submersion depth rating, measured in meters. This icon indicates at least an IPX7 rating which means the sample is submerged to a minimum of 1 meter depth for 30 minutes. If this test is performed, it must be done after impact resistance testing is completed to ensure water tightness under real-life conditions.   |





TECHNOLOGY

# Understanding Dual-Light

**Flashlights:** Designed for distance illumination. The center spot makes them too bright for objects that are close.

**Floodlights:** Designed to light up things that are close. Wide, even lighting with no bright center spot.

**Dual-Light:** Combines a flashlight and a floodlight into the same light. Two lighting tools in one. Completely transforming the way hand-held lights are used.

## ANSI FL-1 Flashlight Lumens & Beam Distance

|                   |     | BEAM DISTANCE - METERS |     |     |     |     |      |
|-------------------|-----|------------------------|-----|-----|-----|-----|------|
|                   |     | Lumens 0               | 100 | 200 | 300 | 400 | 500  |
| MT-100            | 100 |                        |     |     |     |     | 44m  |
| MT-110            | 90  |                        |     |     |     |     | 48m  |
| MT-120            | 140 |                        |     |     |     |     | 68m  |
| MT-130            | 140 |                        |     |     |     |     | 64m  |
| MT-140            | 180 |                        |     |     |     |     | 99m  |
| MT-200            | 100 |                        |     |     |     |     | 51m  |
| MT-210            | 120 |                        |     |     |     |     | 70m  |
| MT-220            | 200 |                        |     |     |     |     | 100m |
| MT-230            | 60  |                        |     |     |     |     | 65m  |
| TAC-300/350       | 180 |                        |     |     |     |     | 190m |
| FDL-300R          | 180 |                        |     |     |     |     | 190m |
| TAC-302           | 150 |                        |     |     |     |     | 180m |
| TAC-400/450       | 200 |                        |     |     |     |     | 210m |
| TAC-500/550       | 200 |                        |     |     |     |     | 210m |
| TAC-310/360XL     | 350 |                        |     |     |     |     | 190m |
| TAC-410/460XL     | 525 |                        |     |     |     |     | 230m |
| TAC-510/540/560XL | 800 |                        |     |     |     |     | 205m |
| NSP-9842XL        | 650 |                        |     |     |     |     | 280m |
| NSR-9844XL        | 650 |                        |     |     |     |     | 280m |
| NSR-9514          | 650 |                        |     |     |     |     | 325m |
| NSR-9614          | 650 |                        |     |     |     |     | 325m |
| NSR-9920/24XL     | 650 |                        |     |     |     |     | 275m |
| NSR-9940/9944XL   | 650 |                        |     |     |     |     | 275m |
| NSR-9746XL        | 650 |                        |     |     |     |     | 450m |
| NSR-9744XL        | 650 |                        |     |     |     |     | 275m |

## BEAM DISTANCE - METERS

|            | Lumens | 0 | 100 | 200 | 300 | 400 | 500 |      |
|------------|--------|---|-----|-----|-----|-----|-----|------|
| NSP-1400   | 60     |   |     |     |     |     |     | 50m  |
| NSP-2422   | 130    |   |     |     |     |     |     | 181m |
| NSP-2492   | 200    |   |     |     |     |     |     | 170m |
| NSR-2522RM | 250    |   |     |     |     |     |     | 213m |
| NSP-4602   | 9      |   |     |     |     |     |     | 18m  |
| NSP-4603   | 120    |   |     |     |     |     |     | 144m |
| NSP-4604   | 55     |   |     |     |     |     |     | 50m  |
| NSP-4605   | 150    |   |     |     |     |     |     | 175m |
| NSP-4606   | 140    |   |     |     |     |     |     | 116m |
| NSP-4608   | 100    |   |     |     |     |     |     | 77m  |
| NSP-4610   | 150    |   |     |     |     |     |     | 60m  |
| NSP-4612   | 100    |   |     |     |     |     |     | 140m |
| NSP-4614   | 300    |   |     |     |     |     |     | 76m  |
| NSP-4616   | 450    |   |     |     |     |     |     | 78m  |
| XPP-5410   | 30     |   |     |     |     |     |     | 40m  |
| XPP-5412   | 50     |   |     |     |     |     |     | 50m  |
| XPP-5420   | 140    |   |     |     |     |     |     | 180m |
| XPP-5422   | 120    |   |     |     |     |     |     | 170m |
| XPP-5450   | 60     |   |     |     |     |     |     | 80m  |
| XPP-5452   | 115    |   |     |     |     |     |     | 92m  |
| XPP-5454   | 115    |   |     |     |     |     |     | 82m  |
| XPP-5456   | 100    |   |     |     |     |     |     | 140m |
| XPP-5458   | 130    |   |     |     |     |     |     | 120m |
| XPP-5570   | 200    |   |     |     |     |     |     | 267m |
| XPR-5572   | 200    |   |     |     |     |     |     | 267m |

## Safety in Hazardous Environments

### FIRE AND EXPLOSION RISK

Industrial and production operations are prime environments for the potential build-up of combustible gases, liquids, dust and other ignitable sources. Fire and explosion hazards can occur in that environment. Working in a hazardous environment requires fixed and portable task lighting that are intrinsically safe to keep personnel and property safe from explosion and fire.

### WHAT DOES IT MEAN WHEN A DEVICE IS INTRINSICALLY SAFE?

A device that is intrinsically safe means that it is safe to use in hazardous work environments and by itself will not cause a fire or explosion. Maintaining intrinsic safety requires that the light be used properly and not tampered with so the intrinsically safe capability remains in tact.



An explosive atmosphere is defined as a mixture of dangerous substances with air, under atmospheric conditions, in the form of gases, vapors, mist or dust in which, after ignition has occurred, combustion spreads to the entire unburned mixture.

|   | Model                   |  |  |  |  |  |  |  |
|---|-------------------------|---|---|---|---|---|---|--|
|     | XPP-5410                | ✓   |   | ✓   | ✓   | ✓   | ✓   | ✓  |
|     | XPP-5412                | ✓   |   | ✓   | ✓   | ✓   |   |  |
|     | XPP-5420G<br>XPP-5420B  | ✓   |   | ✓   | ✓   | ✓   | ✓   | ✓  |
|     | XPP-5422G<br>XPP-5422B  | ✓   |   | ✓   | ✓   | ✓   | ✓   | ✓  |
|     | XPP-5422GM              | ✓   |   | ✓   | ✓   | ✓   |   | ✓  |
|    | XPP-5450<br>XPP-5452    | ✓   |   | ✓   | ✓   | ✓   |   | ✓  |
|    | XPP-5454G<br>XPP-5454GC | ✓   |   | ✓   | ✓   | ✓   |   | ✓  |
|  | XPP-5456<br>XPP-5458    | ✓   |   | ✓   | ✓   | ✓   | ✓   |  |
|  | XPP-5570<br>XPR-5572    |   | ✓   |   |   |   | ✓   |  |

† As of the printing of this catalog

## TESTING LABORATORIES



### ETL

The ETL Listed Mark is proof of product compliance (electrical, gas and other safety standards) to North American safety standards, including UL, ANSI, CSA, ASTM and NFPA standards



### cULus

The cULus Listed Mark indicates products have been evaluated and are in compliance with both Canadian and U.S. safety requirements.



### ATEX Directive

The European based ATEX directive defines the equipment and work environment that is allowed to function in an explosive atmosphere. The regulations apply to all equipment intended for use in explosive atmospheres, either electrical or mechanical, including protective systems. The directive covers a large range of equipment where a potentially explosive atmosphere may be present.



### CE

CE mark is the official marking required by the European Community for products that will be sold, or put into service in the European community. The product fulfills all essential safety and environmental requirements for the product's intended use, as they are defined in the European Directives, primarily ISO Standards.



### IECEX

The IECEX is the International Electrotechnical Commission system for the certification to standards for electrical equipment for explosive atmospheres.



### MSHA

Mine Safety and Health Administration requires that portable battery operated lighting be designed and tested to not pose an explosion hazard in mining operations.



### INMETRO

National Institute of Metrology, Quality and Technology (Inmetro) supports Brazilian enterprises, to increase their productivity and the quality of goods and services




## Why Make a Flashlight Using Bulbs?



### Some manufacturers are still making flashlights with incandescent bulbs.

Even the best xenon and krypton bulbs break when the light is dropped and can also produce a yellow color light that distorts the appearance of the object being illuminated.

**At Nightstick we believe in using the best available technology.**

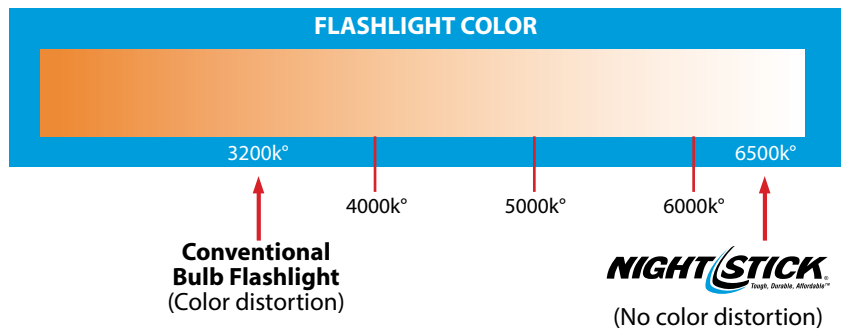

NSR-9614XL

### World's Best LEDs

All Nightstick flashlights use LED technology from CREE® the makers of the brightest and most rugged LEDs in the world.

CREE® brilliant white-light LED's have an operating life in excess of 50,000 hours. That means if you use a Nightstick flashlight 8 full hours every workday of the year, the CREE® LED would last over 24 years. A Nightstick flashlight could literally be the last flashlight you will ever need.

We select the whitest LEDs so objects are illuminated with no color distortion. Reflectors are designed to efficiently capture and concentrate light from the LEDs for maximum beam distance.

# Battery Characteristics



Standard use  
rechargeable NiMH



Standard use  
rechargeable Lithium-ion



Standard use  
Lithium air CR-123



Standard use alkaline  
AA – AAA – AAAA




Standard use  
NiCd

|  |   |
|--|---|
| <p><b>Nickel Metal Hydride<br/>NiMH</b></p>        | <ul style="list-style-type: none"> <li>▪ Ideal for modern LED rechargeable flashlights</li> <li>▪ Virtually no memory effect. Near full capacity every charge cycle</li> <li>▪ 2 times the energy capacity of comparable NiCd battery</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>   |
| <p><b>Rechargeable Lithium</b></p>                 | <ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Higher energy density than NiCd, NiMH and alkaline batteries</li> <li>▪ No memory effect</li> <li>▪ High cell voltage</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life - Very long operating life, 15 to 20 years</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>   |
| <p><b>Lithium Air Cells<br/>CR-123</b></p>         | <ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Very high energy density for its size</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life</li> </ul>   |
| <p><b>Alkaline Batteries<br/>AA, AAA, AAAA</b></p> | <ul style="list-style-type: none"> <li>▪ The most popular premium general purpose battery</li> <li>▪ Four times the capacity of an equivalent size rechargeable NiCd or NiMH battery</li> <li>▪ Suitable for high drain rate applications</li> <li>▪ Good shelf life</li> <li>▪ Not normally rechargeable</li> </ul>  |
| <p><b>Nickel Cadmium<br/>NiCd</b></p>              | <ul style="list-style-type: none"> <li>▪ Ideal for old style flashlights with xenon bulbs</li> <li>▪ Flat discharge characteristic but falls off rapidly at the end of the cycle</li> <li>▪ Major drawback is recharge memory effect. During charging a chemical process is degrading the battery's ability to store energy. Each charge degrades the battery more. Eventually the battery can no longer be charged</li> <li>▪ Use of heavy metals makes it environmentally toxic</li> <li>▪ Typical cycle life is over 500 cycles</li> </ul> |

# Innovation • Quality • Safety

For over 30 years, Bayco Products' vast array of portable & corded lighting products, have been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized world-wide as high-performance, high-quality, high-value lighting solutions across virtually every industry.

Headquartered in North Texas, Bayco Products' 110,000 square foot facility is the international headquarters for R&D, engineering, marketing, sales and distribution. Bayco Products has dedicated ISO 9001 Certified factories both in the US and abroad.



**BAYCO**  
PRODUCTS INC.®

**NIGHTSTICK**  
Tough, Durable, Affordable™

Nightstick is the exclusive brand of professional lighting tools made by Bayco Products, Inc.



# Engineering • Testing • Manufacturing

*Nightstick flashlights are designed in the USA and manufactured at Bayco's dedicated ISO 9001 Certified Factories.*



*Rigorous quality testing and analysis is utilized to insure product quality and consistency*



*Our luminosity and testing facility measures product performance to confirm complex design parameters*



# **NIGHTSTICK**<sup>®</sup>

*Tough, Durable, Affordable*<sup>™</sup>

**BAYCO**<sup>®</sup>  
PRODUCTS INC.

**640 S. Sanden Blvd.**

**Wylie, TX 75098**

**800-233-2155**

**[www.mynightstick.com](http://www.mynightstick.com)**

Nightstick products are designed in Texas, US and manufactured abroad with components from domestic and international sources.

The distinctive shapes, styles, packaging, configurations and overall appearances of these products are trademarks of Bayco Product, Inc. The unique LED configuration, body and case shapes inherently identify them as members of the Bayco Product, Inc. portfolio.



Intertek



CAT-NS-16