## MARKETS SERVED: FIRE MILITARY INDUSTRIAL LAW ENFORCEMENT OUTDOOR DIVE



Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of Advanced Lighting Systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (performance symbols and standards that effectively communicate a lighting tool's features and benefits) and continue to increase the number of indusrtry leading safety approvals for specific models.

Our new Lighting catalog features multiple technology advances. These include LED performance upgrades, new switch features,

upgraded safety approvals and enhanced packaging. You'll see that the contents within dovetail our commitment to environmentally friendly practices. Many of our flashlights use LED's and provide several benefits that help us protect our planet. LED's are longer lasting, promote extended battery life and are much brighter than incandescent bulbs.

From basic models to the high-performance 9410 LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 8,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican's industry-leading guarantee of excellence.

So look through our new catalog and discover the ideal lighting tools for your specific needs.

## CONTENTS

- Message from the President and CEO
- Performance Standards and Ratings 3-4
- 5-6 Safetv

| 7-10  | Remote Area Lighting Systems           |
|-------|--|
| 11-12 | Personal Lights                        |
| 13-14 | Medium Duty Lights                     |
| 15-16 | Tactical/Duty Lights                   |
| 17-18 | Tactical/Duty LED Lights               |
| 19-22 | LED and Recoil <sup>™</sup> LED Lights |
| 23-24 | Headlights                             |
| 25-26 | Specialty Lights                       |
| 27-28 | Dive Lights                            |
| 29-30 | Heavy Duty Lights                      |
|       |  |

- Light Mounting Systems and Holsters 31-32
- 33-34 Helmet Light Holders
- 35-39 Light Specification Charts
- Private Label Program/Cases and Specialty Products
- 41 **Global Locations**
- 42 Product Guarantee and Warranty

## PERFORMANCE STANDARDS **AND RATINGS**

### ANSI STANDARDS (American National Standards Institute)

Why create standards? While Pelican was one of the first manufacturers to use guantifiable test Standards Institute (ANSI), with input from procedures, the need was recognized to develop the flashlight industry, developed performance a common language that customers could use to standards and symbols to effectively select the right flashlight for their specific

needs. As a result, the American National communicate a flashlight's features and benefits.

### **GLOSSARY OF TERMS**

**CANDELA –** A unit of measurement of light source in a particular direction.

**LUX –** The unit of luminous flux in the nternational System, equal to the amount enclose the device itself. The walls of of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**LUMEN –** A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous lux," which is energy within the range of frequencies we perceive as light.

### **INTEGRATING SPHERE -**

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can total the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test

**IP** (Ingress Protection) –Ingress Protection (IP) ratings specify the environmental protection the enclosure

provides. The IP rating normally has two numbers from solid objects or materials (dust) where the second number represents protection from liquids the level of protection from solid objects and 4 describes the level of protection from liquids.

**RECHARGEABLE –** Denotes a flashlight with the rechargeable icon.



### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

LIGHTS

PELICAN

### 60 M

### 100 M

120 M

These standards are accredited by ANSI, which is a private non-profit organization that oversees the development of voluntary consensus standards for products, services, processes, systems, and personnel in the United States.

The organization also coordinates U.S. standards with international standards so American products can be used globally. Resulting ANSI/NEMA FL 1 Standards include the six criteria described below:



### RUN TIME

Run Time is defined as the duration of time from the initial light output value - defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



### **BEAM DISTANCE**

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the light emitted from the full moon "on a clear night in an open field").



### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



### WATER RESISTANT Water Resistant – **IPX4** Water splashed against the device


from any direction shall have no harmful effects.



### WATER PROOF/ SUBMERSIBLE

Water Proof – IPX7 - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

Submersible – IPX8 - Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuous immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

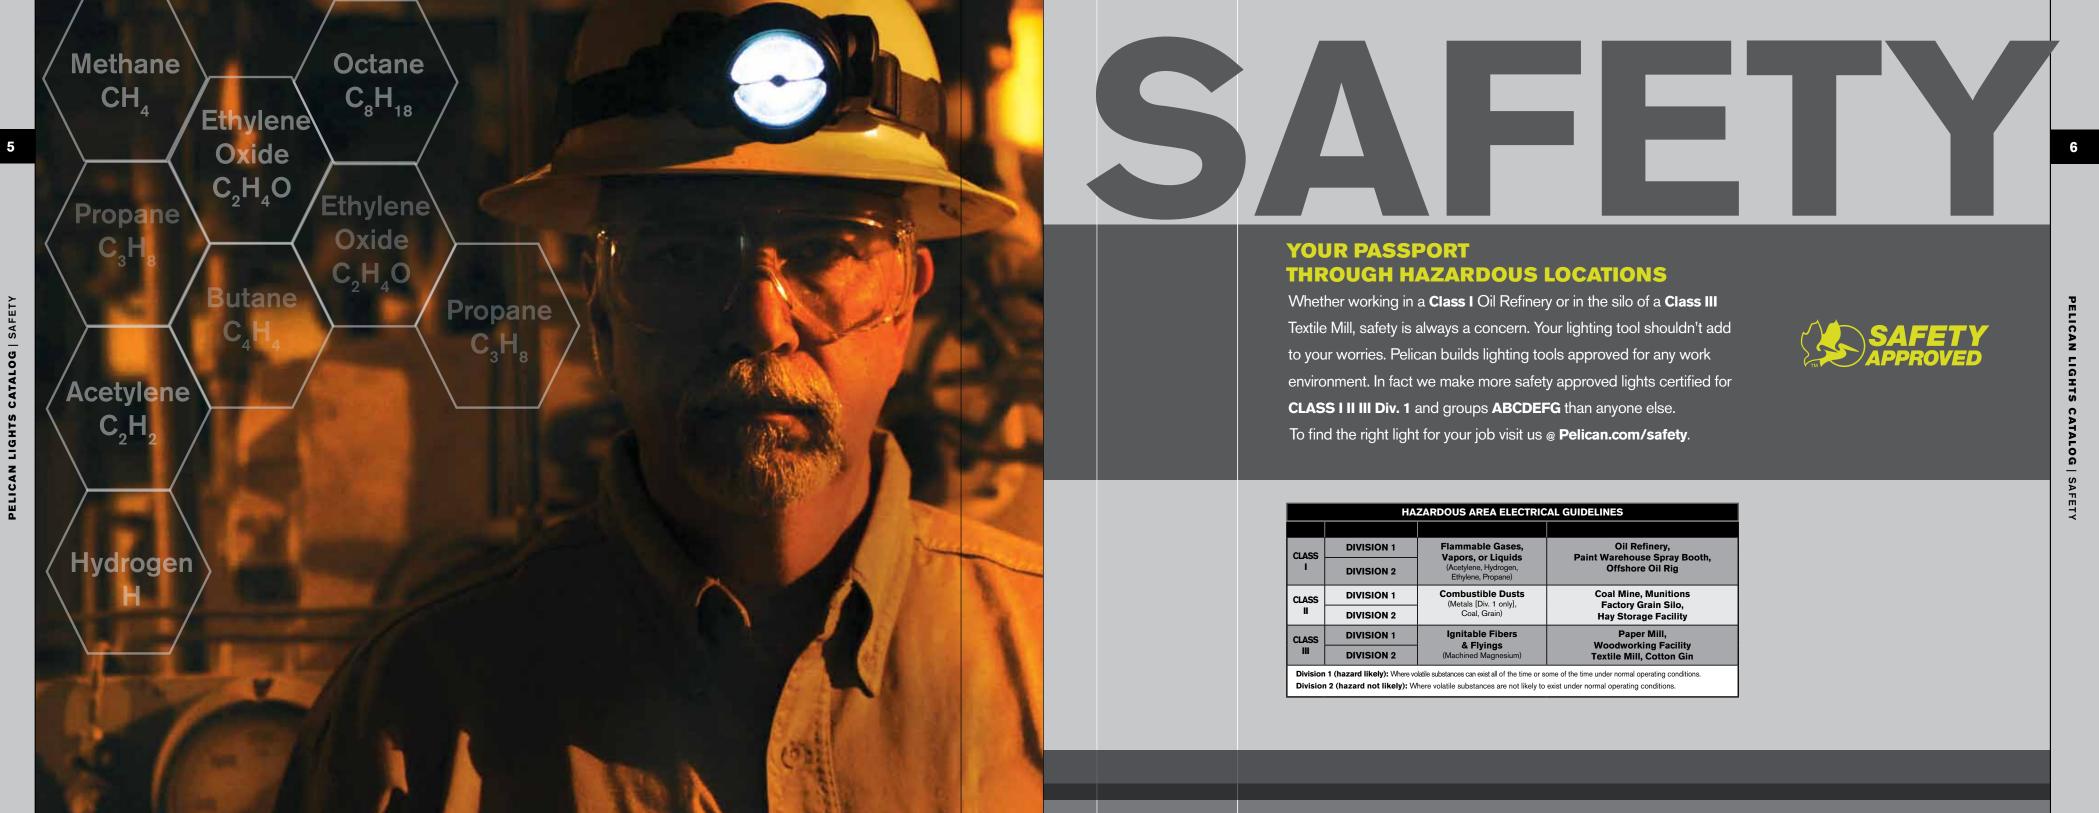

| HAZARDOUS AREA ELECTRICAL GUIDELINES   |                   |   |   |  |  |  |
|--|-------------------|---|---|--|--|--|
|  |                   |   |   |  |  |  |
| CLASS  | <b>DIVISION</b> 1 | Flammable Gases,<br>Vapors, or Liquids      | Oil Refinery,<br>Paint Warehouse Spray Booth,                       |  |  |  |
| I  | <b>DIVISION 2</b> | (Acetylene, Hydrogen,<br>Ethylene, Propane) | Offshore Oil Rig  |  |  |  |
| CLASS  | DIVISION 1        | Combustible Dusts<br>(Metals [Div. 1 only], | Coal Mine, Munitions<br>Factory Grain Silo,<br>Hay Storage Facility |  |  |  |
| I  | DIVISION 2        | Coal, Grain)                                |   |  |  |  |
| CLASS  | DIVISION 1        | Ignitable Fibers<br>& Flyings               | Paper Mill,<br>Woodworking Facility                                 |  |  |  |
| III  | DIVISION 2        | (Machined Magnesium)                        | Textile Mill, Cotton Gin  |  |  |  |
| Division 1 (hazard likely): Where volatile substances can exist all of the time or some of the time under normal operating conditions.<br>Division 2 (hazard not likely): Where volatile substances are not likely to exist under normal operating conditions. |                   |   |   |  |  |  |

## REMOTE AREA LIGHTING SYSTEMS

### THE MOST INNOVATIVE RECHARGEABLE LIGHTING SYSTEM ON THE MARKET

Rechargeable Battery Powered Lighting for the most demanding tasks

- Redefines the Portable Lighting category
- Over 10 models and growing
- Best in Class performance and durability
- Designed for Heavy Duty Jobs
- Safe, Noise Free, Fume Free,
- Spot Lighting, Flood Lighting, NVG Lighting
  New Intelligent Control Switch Technology optimizes power output vs burntime
- New Safety approved 9435 for hazardous locations



### 9430IR INFRARED REMOTE AREA LIGHTING SYSTEM 🌾





REMITTE AREA

**RUN TIME:** 15h (low), 8 h (high) ■ LIGHT OUTPUT:

1000 LUMENS (low), 2000 (high)

### 9430 REMOTE AREA LIGHTING SYSTEM 🗲



| - |  |
|---|--|
|   | High Flux LED                                    |
|   | 12v Rechargeable, Sealed                         |
|   | 15.75" (40 cm) Closed<br>32.28" (82 cm) Extended |
|   |  |
|   | N/A  |
|   | 1000 (Low), 2000 (High)                          |
|   | 15 hrs. (Low), 8 hrs. (High)                     |
|   | 90°  |
|   | 24 per head                                      |
|   | 1  |

| LIGHT SOURCE   |
|----------------|
| BATTERIES      |
| LENGTH         |
| COLORS         |
| APPROVALS      |
| LIGHT OUTPUT   |
| RUN TIME       |
| BEAM SPREAD    |
| NUMBER OF LEDs |
| LAMP HEADS     |
|                |



9435 REMOTE AREA LIGHTING SYSTEM

|--|

### High Flux LED

12v Rechargeable, Sealed

15.75" (40 cm) Closed 32.28" (82 cm) Extended

|  | _ | _ |
|--|---|---|
|  |   |   |
|  |   |   |
|  |   |   |
|  |   | _ |

CI D2

750 (Low), 1500 (High)

10 hrs. (Low), 5 hrs. (High)

18 ner hear

Infrared 940nm

12v Rechargeable, Sealed

15.75" (40 cm) Closed 32.28" (82 cm) Extended

| N/A                          |
|------------------------------|
| N/A                          |
| 15 hrs. (Low), 8 hrs. (High) |
| N/A                          |
| 24 per head                  |
|                              |

### 9430SL SPOT LIGHT REMOTE AREA LIGHTING SYSTEM 🌔

High Flux LED

12v Rechargeable, Sealed

15.75" (40 cm) Closed 32.28" (82 cm) Extended

| N/A                      |
|--------------------------|
| 1000 (Low), 2000 (Hig    |
| 15 hrs. (Low), 8 hrs. (H |
| 10°                      |
| 24 per head              |



**RALS 9435** PELICAN'S FIRST SAFETY APPROVED REMOTE AREA LIGHTING SYSTEM Class I Division 2 groups ABCD T4

### 9440 REMOTE AREA LIGHTING SYSTEM





| LIGHT SOURCE   |
|----------------|
| BATTERIES      |
| LENGTH         |
| COLORS         |
| APPROVALS      |
| LIGHT OUTPUT   |
| RUN TIME       |
| BEAM SPREAD    |
| NUMBER OF LEDs |
| LAMP HEADS     |
|                |



### 9460 REMOTE AREA LIGHTING SYSTEM <

LIGHT SOURCE BATTERIES LENGTH COLORS APPROVALS LIGHT OUTPUT RUN TIME BEAM SPREAD NUMBER OF LEDs LAMP HEADS











### 9470 REMOTE AREA LIGHTING SYSTEM ( 🔇

| ligh Flux LED                                     |
|---|
| 2v Rechargeable, Sealed                           |
| 24.83" (63 cm) Closed<br>72.85" (185 cm) Extended |
|   |
| 1/A   |


4000 (Low), 8000 (High)

14 hrs. (Low), 7 hrs. (High)

90°

24 per head

LIGHT SOURCE BATTERIES LENGTH COLORS APPROVALS LIGHT OUTPUT RUN TIME BEAM SPREAD NUMBER OF LEDs LAMP HEADS

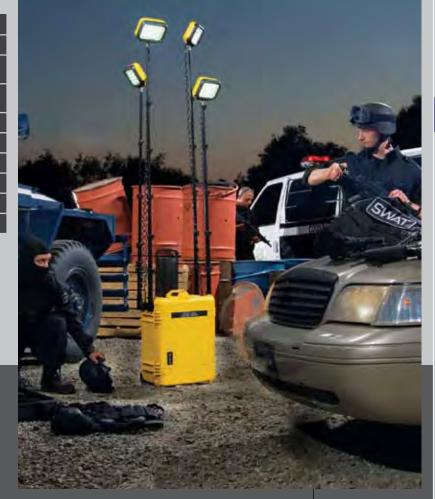

| High Flux LED    |
|------------------|
| N/A              |
| 20.62" (52.4 cm) |
|                  |

400 (Red LED), 2000 (White LED)

210° Diffused


N/A

36 per head - 24 white/12 red

LIGHT SOURCE BATTERIES LENGTH COLORS APPROVALS LIGHT OUTPUT RUN TIME BEAM SPREAD NUMBER OF LEDs


LAMP HEADS



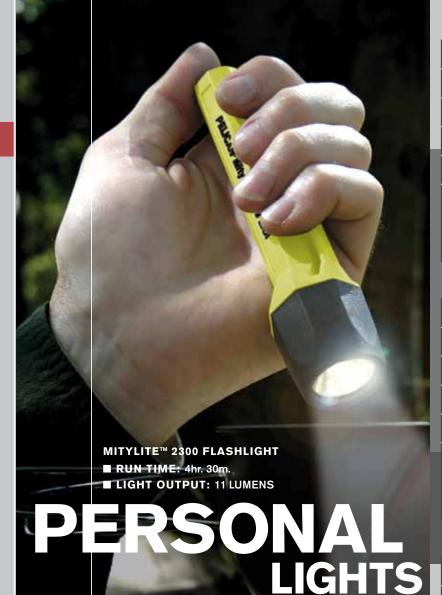

Comfortable in your back pocket but confident in tough situations where safety is paramount. These are your handy go-to lights built tough with brightness that penetrates thick smoke and fog.



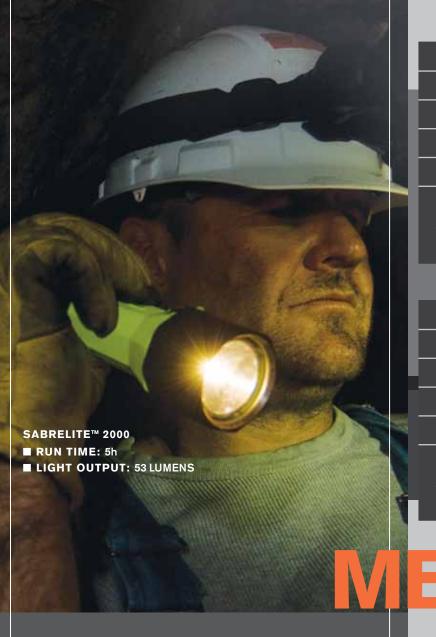









LIGHT OUTPUT

### STEALTHLITE<sup>™</sup> 2400





The most safety approved lighting tools for the hard working professional and extreme outdoor enthusiasts. Features include chemical-resistant bodies and hi-power Xenon lamp modules.

FLT STANDARD 45 LUMENS LIGHT OUTPUT

۵.

### SABRELITE<sup>™</sup> 2000

### STEALTHLITE<sup>™</sup> 2400 PHOTOLUMINESCENT



M6 2320





PM6 3320





M6 2330 LED RUN TIME: 6 hrs. ■ LIGHT OUTPUT: 100 LUMENS

### 3390 KNIFE/LITE COMBO

### LIGHT SOURCE XENON 2 CR123 Lithium (Included) BATTERIES TACTICAL OR PATROL, PELICAN HAS YOU COVERED These handheld and firearm-mountable lights will leave subjects LENGTH 5.27" (13.4cm) frozen in their tracks. They are lightweight with no-slip bodies for a sure grip. Push button switch is easy to operate, even when wearing thick gloves. Safety features include a polarity guard tray that makes operating the flashlight impossible if cells are inverted COLORS APPROVALS and prevents dangerous outgassing. Smaller models make the ideal backup to the larger, primary patrol lights. NUMENS 1h 30min 4330cc 131m ANSI STANDARDS LIGHT OUTPUT BEAM PEAK BEAM WATER RESISTANT RUNTIME DISTANCE INTENSITY M10 8040 XENON LIGHT SOURCE XENON 2 CR123 Lithium (Included) BATTERIES 4 C Alkaline (Not included) 5.51" (14cm) 11.25" (28.6cm) LENGTH COLORS APPROVALS CI II III D2 FLT STANDARD 5h 15min 9820cc 198m 145m ANSI STANDARDS RUNTIME BEAM PEAK BEAM WATER LIGHT OUTPUT RUNTIME BEAM PEAK BEAM WATER RESISTANT DISTANCE INTENSITY RESISTANT DISTANCE M11 RECHARGEABLE 8050 LIGHT SOURCE XENON XENON 2 CR123 Lithium (Included) BATTERIES 4 C NiCad (Included) 5.27" (13.4cm) 11.25" (28.6cm) LENGTH COLORS APPROVALS LUMENS L 1h 30min 13707c $\bigcirc$ 131m 234m ANSI STANDARDS LIGHT OUTPUT RUNTIME BEAM PEAK BEAM WATER RUNTIME BEAM PEAK BEAM WATER DISTANCE INTENSITY RESISTANT RESISTANT DISTANCE INTENSITY

### **ADVANCED LED TECHNOLOGY**

Packed with advanced LEDs that are powerful yet highly efficient for extended run times. Built tough to withstand the hard knocks that come with the job. Select models have a unique no-slip grenade grip body. Includes the 7060 LED, featuring patented dual switch technology. It was designed from a collaboration between Pelican and the City of Los Angeles Police Department (LAPD™) and is standard issue for numerous police departments.











M6 2330 LED RUN TIME: 6 hrs.

# TACTICAL/DUTY LED

■ LIGHT OUTPUT: 100 LUMENS

TS

STEALTHLITE<sup>™</sup> 2410 RECOIL<sup>™</sup> LED RUN TIME: 7 hrs. 15 mins.

LIGHT OUTPUT: 72 LUMENS

### 10.000 ID RECOIL" LED

### LED PRESCRIPTION FOR THE NEAR **OR FAR SIGHTED**

From the garage to the refinery, from expeditions up to K2 to deep dives in Vanuatu – you'll find your bright, efficient, and durable LED lighting tool here. All are engineered with leading-edge technology and a strong build quality. Includes the innovative Recoil<sup>™</sup> LED Technology<sup>™</sup> that reflects light to a super bright, concentrated beam.



BATTERIES

LENGTH

COLORS

APPROVALS

ANSI STANDARDS



FLT STANDARD

RUNTIME

LED

CI D1

FL1 STANDARD

BEAM

DISTANCE

6.2" (15.7cm)

44cd

PEAK BEAM

INTENSITY

WATER

RESISTANT

WATER

RESISTANT

3 AAAA Alkaline (Included)

### MINI FLASHER™ 2130 LED







N/A LIGHT OUTPUT

### VB3™ 2220 LED





### **VB3™ 2220NV LED**




1.0 LUMENS (Non ANSI)

LIGHT OUTPUT

19

### 2365 LED FLEX NECK

20

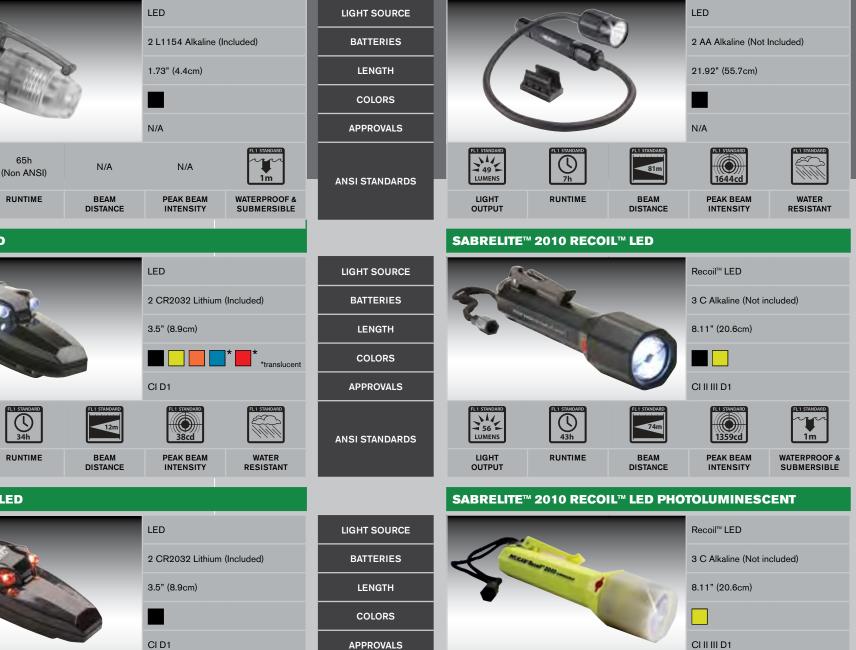

100h N/A N/A (Non ANSI) RUNTIME BEAM PEAK BEAM

DISTANCE INTENSITY

WATER RESISTANT

ANSI STANDARDS



RUNTIME


BEAM PEAK BEAM DISTANCE INTENSITY

74m


1359cd

WATERPROOF & SUBMERSIBLE

1m

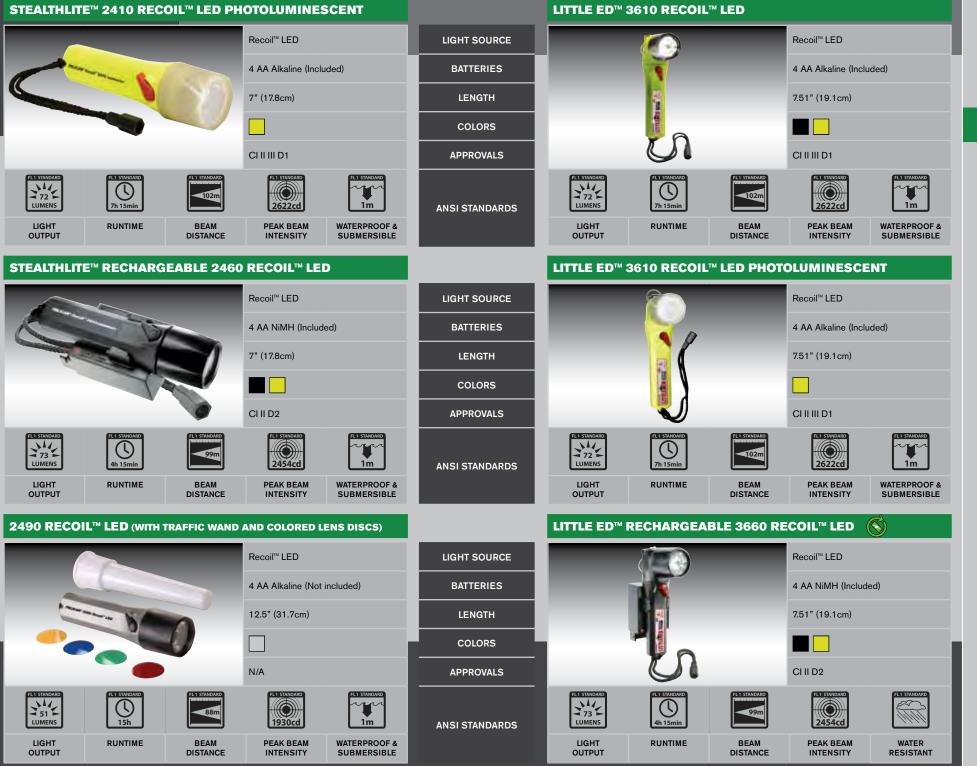



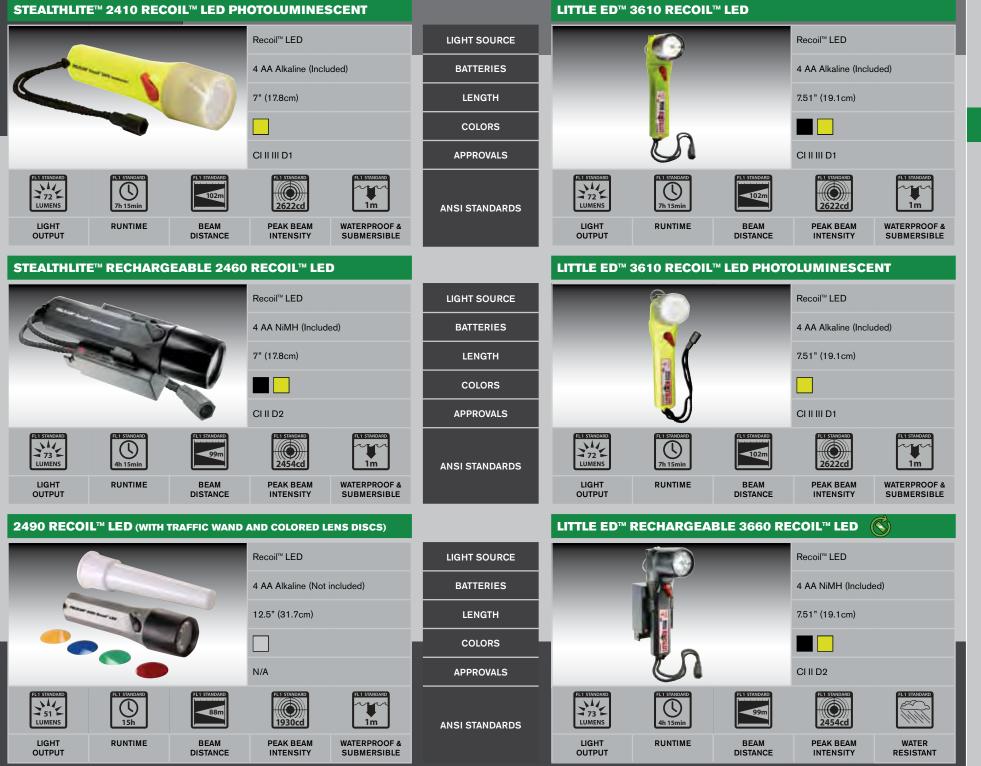



Y

1m

2490 RECOIL<sup>™</sup> LED (WITH TRAFFIC WAND) RUN TIME: 15 hrs. **LIGHT OUTPUT: 51 LUMENS** 

SABRELITE<sup>™</sup> 2020 RECOIL<sup>™</sup> LED







### HEADSUP LITE<sup>™</sup> 2600



FL1 STANDARD 18 LUMENS LIGHT OUTPUT

**HEADSUP LIT** 



HIGH 30 LUMENS

LIGHT OUTPUT

### **HEADSUP LITI**



HIGH 26 LUMENS

LIGHT OUTPUT

## FREE YOUR HANDS

LIGHTS

For two-handed tasks on the factory floor or at base camp, Pelican<sup>™</sup> head lights lead the way. Super bright Incandescent and LED models include a rubber strap for helmet/hard hat use as well as an adjustable cloth strap. The lightweight 2690 features a rotary bezel switch that is easy to operate, even while wearing bulky gloves.

HEADSUP LITE™ 2690 LED

RUN TIME: 10 hrs. 30 mins. ■ LIGHT OUTPUT: 60 LUMENS

23

|                           |                  | Krypton (primary)<br>Krypton (back-up) |                             | LIGHT SOURCE           |                              |                               |                  | Halogen (high)<br>LED (low) |                             |  |
|---------------------------|------------------|--|-----------------------------|------------------------|------------------------------|-------------------------------|------------------|-----------------------------|-----------------------------|--|
| - Fee                     |                  | 4 AA Alkaline (Included)               |                             | BATTERIES              |                              | 4 AA Alkaline (Included)      |                  |                             |                             |  |
| and a famous party of the | 2                | 3.81" (9.7cm)                          |                             | LENGTH                 |                              | U Human                       |                  | 2.63" (6.7cm)               |                             |  |
| NICAL                     | a                |  |                             | COLORS                 |                              |                               |                  |                             |                             |  |
|                           |                  | CI II III D2                           |                             | APPROVALS              |                              | stell" Lite                   |                  | CI D2                       |                             |  |
| FL1 STANDARD              | FL1 STANDARD     | ELI STANDARD<br>203cd                  | FLI STANDARD                | ANSI STANDARDS         | LUMENS                       | Low<br>2h 45min               | HIGH LOW         | 586cd                       | FLI STANDARD                |  |
| RUNTIME                   | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY                 | WATERPROOF &<br>SUBMERSIBLE |                        | LIGHT<br>OUTPUT              | RUNTIME                       | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY      | WATER<br>RESISTANT          |  |
| TE™ 2610 LEI              | ס                |  |                             |                        | HEADSUP L                    | ITE™ 2680 RE                  | COIL™ LED        |                             |                             |  |
|                           | _                | LED                                    |                             | LIGHT SOURCE           | 1 A                          |                               |                  | Recoil <sup>™</sup> LED     |                             |  |
| HoadsUP Lite              | -                | 3 AAA Alkaline (Incl                   | uded)                       | BATTERIES              |                              | 1 miles                       |                  | 4 AA Alkaline (Inclu        | ded)                        |  |
|                           |                  | 1.49" (3.8cm)                          |                             | LENGTH                 | and the second               |                               | ~                | 4.64" (11.8cm)              |                             |  |
| adaup Lize                | 0                |  |                             | COLORS                 | Madalip                      | ALCON .                       | 3                |                             |                             |  |
|                           |                  | CI D1                                  |                             | APPROVALS              |                              |                               |                  | CI II III D2                |                             |  |
| HIGH<br>U<br>19h          | Low<br>28m       | HIGH<br>194cd                          | FL 1 STANDARD               | ANSI STANDARDS         | FLI STANDARD<br>69<br>LUMENS | FLI STANDARD<br>O<br>9h 30min | FL1 STANDARD     | FLI STANDARD<br>3788cd      | FLI STANDARD                |  |
| RUNTIME                   | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY                 | WATER<br>RESISTANT          |                        | LIGHT<br>OUTPUT              | RUNTIME                       | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY      | WATERPROOF &<br>SUBMERSIBLE |  |
| TE™ 2620                  |                  |  |                             | HEADSUP LITE™ 2690 LED |                              |                               |                  |                             |                             |  |
|                           |                  | Xenon (high)<br>LED (low)              |                             | LIGHT SOURCE           |                              |                               |                  | LED                         |                             |  |
|                           |                  | 3 AAA Alkaline (Included)              | BATTERIES                   | and the second         |                              | 3 AAA Alkaline (Included)     |                  |                             |                             |  |
|                           |                  | 2.16" (5.5cm)                          |                             | LENGTH                 |                              |                               |                  | 2.81" (7.1cm)               |                             |  |
|                           |                  |  |                             | COLORS                 | Adoup Lite                   |                               | 50               | -                           |                             |  |
|                           |                  | CI D1                                  |                             | APPROVALS              |                              |                               |                  | CI II III D1                |                             |  |
| 2h 15min                  | LOW<br>44m       | HICH<br>491cd                          | EL 1 STANDARD               | ANSI STANDARDS         | ELI STANDARD<br>60<br>LUMENS | FL I STANDARD                 | EL1 STANDARD     | FL1 STANDARD<br>1664cd      | FLI STANDARD                |  |
| RUNTIME                   | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY                 | WATER<br>RESISTANT          |                        | LIGHT<br>OUTPUT              | RUNTIME                       | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY      | WATER<br>RESISTANT          |  |

HEADSUP LITE<sup>™</sup> 2640

### BIG ED™ 3700

THE RIGHT ANGLE

Designed for the fire fighter and

fog, and dust with its advanced reflector and high power Krypton

lamp module. Hands-free design for a turn out coat but equally

comfortable in your hand.

search and rescue personnel, the Big Ed<sup>™</sup> cuts through thick smoke,

FOR THE JOB













BIG ED™ 3700 RUN TIME: 6 hrs. 15 mins. ■ LIGHT OUTPUT: 39 LUMENS













SERIES LIGHT SOURCE

### SCUBA

Discover new underwater worlds with the help of our extensive selection of dive lights. Whether in search of a pocket model, such as the lightweight 1965N that fits in your BC pocket, or a primary light with long burn time such as the Nemo<sup>™</sup> 4300, there is a member of the Pelican<sup>™</sup> Nemo<sup>™</sup> family to suit your diving needs.



NEMO<sup>™</sup> 4300 **RUN TIME:** 6 hrs.

LIGHT OUTPUT: 175 LUMENS

■ SUBMERSIBLE: 100m

27

AN ລ HTS 2

29

### KINGLITE<sup>™</sup> 40



251.0 LUMENS (Non ANSI)

LIGHT OUTPUT

### 9410 LED LAN



LIGHT OUTPUT


9410 LED LANTERN RUN TIME: 1 hrs. 45 mins. LIGHT OUTPUT: 710 LUMENS

### PACK THE POWER, NOT THE POUNDS

Our heavy duty lights are big on performance, yet light in weight. Smart features for the KingLite<sup>™</sup> include dual filament Xenon lamp with back-up housed behind the reflector, multi-position handle, and dual direction switch with lock. The rechargeable 9410 LED Lantern uses four LEDs (for high, low, and flashing mode) powered by the latest generation NiMH batteries with charge status indicator.



| 000  |                  |                                       |                    |  |  |  |
|--|------------------|---------------------------------------|--------------------|--|--|--|
|  |                  | Xenon                                 |                    | LIGHT SOUR                                 |  |  |
|  |                  | 8 D Alkaline (Not inc                 | luded)             | BATTERIE                                   |  |  |
| 10   |                  | 9.37" (23.8cm)                        |                    | LENGTH                                     |  |  |
|  |                  |                                       |                    | COLORS                                     |  |  |
|  |                  | CI II D2                              |                    | APPROVALS                                  |  |  |
| FLI STANDARD   | FL 1 STANDARD    | ELI STANDARD<br>2622cd                | FL 1 STANDARD      | ANSI STANDAF                               |  |  |
| RUNTIME  | BEAM<br>DISTANCE | PEAK BEAM<br>INTENSITY                | WATER<br>RESISTANT |  |  |  |
| NTERN 🔇  |                  |                                       | NEW                |  |  |  |
|  |                  | LED                                   |                    | LIGHT SOUR                                 |  |  |
|  |                  |                                       |                    |  |  |  |
| Sec.   |                  | 4 D Ni-MH (Included                   | )                  | BATTERIES                                  |  |  |
| 1 Sr   | 1                | 4 D Ni-MH (Included<br>8.75" (22.2cm) | )                  |  |  |  |
|  | 1                |                                       | ))                 | BATTERIES                                  |  |  |
|  |                  |                                       | )                  | BATTERIES                                  |  |  |
|  |                  | 8.75" (22.2cm)                        |                    | BATTERIES<br>LENGTH<br>COLORS              |  |  |
| HOW<br>HOW<br>HOW<br>HOW<br>HOW<br>HOW<br>HOW<br>HOW | BEAM<br>DISTANCE | 8.75" (22.2cm)<br>                    |                    | BATTERIES<br>LENGTH<br>COLORS<br>APPROVALS |  |  |

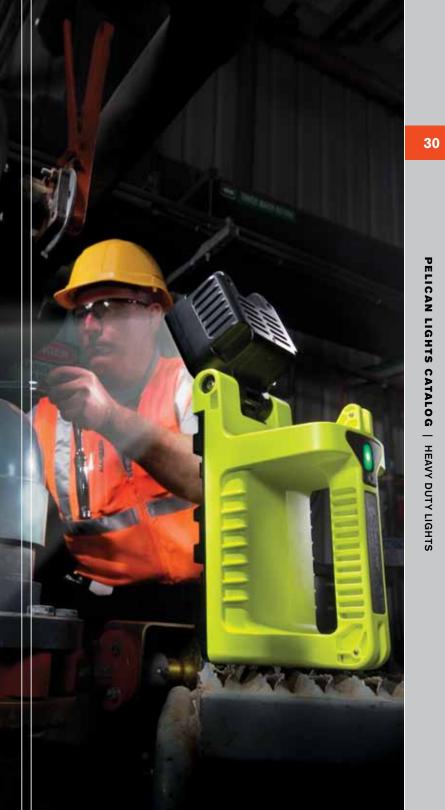



## LIGHT MOUNTING SYSTEMS AND HOLSTERS



Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip.



610 FRONT SIGHT MOUNT Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



630 FOREGRIP MOUNT Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5

**2326 REMOTE PRESSURE SWITCH** Fits Pelican Lights -2320, 2330, 2390 COLOR: Black • WT.: 2.0 oz.



620 SIDE SLING MOUNT Fits Pelican Lights -2320, 2330, 2390 Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



AND HOLST

E LIG


5

CATALO

LIGH

PELICAN

| HOLSTER STYLE      |   |                          |                                      |                       |                                      |                                |                                      |  |  |  |  |  |  |
|--------------------|---|--------------------------|--------------------------------------|-----------------------|--------------------------------------|--------------------------------|--------------------------------------|--|--|--|--|--|--|
| 2327<br>Cordura* H |   | 2357<br>Cordura* Holster | 2407<br>Cordura <sup>®</sup> Holster | 7076<br>Plain Holster | 7078<br>Cordura <sup>®</sup> Holster | 7079<br>Basketweave<br>Holster | 8057<br>Cordura <sup>®</sup> Holster |  |  |  |  |  |  |
|                    | 9 |                          |                                      |                       |                                      |                                | 00                                   |  |  |  |  |  |  |
|                    |   |                          |                                      |                       |                                      |                                |                                      |  |  |  |  |  |  |
| •                  |   |                          |                                      |                       |                                      |                                |                                      |  |  |  |  |  |  |
| •                  |   |                          |                                      |                       | _                                    |                                |                                      |  |  |  |  |  |  |
| •                  |   |                          |                                      |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   | •                        |                                      |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          | •                                    |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          | •                                    |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          | •                                    |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          | •                                    |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          | •                                    |                       |                                      |                                |                                      |  |  |  |  |  |  |
|                    |   |                          |                                      | •                     | •                                    | •                              |                                      |  |  |  |  |  |  |
|                    |   |                          |                                      |                       |                                      |                                | •                                    |  |  |  |  |  |  |
|                    |   |                          |                                      |                       |                                      |                                | •                                    |  |  |  |  |  |  |

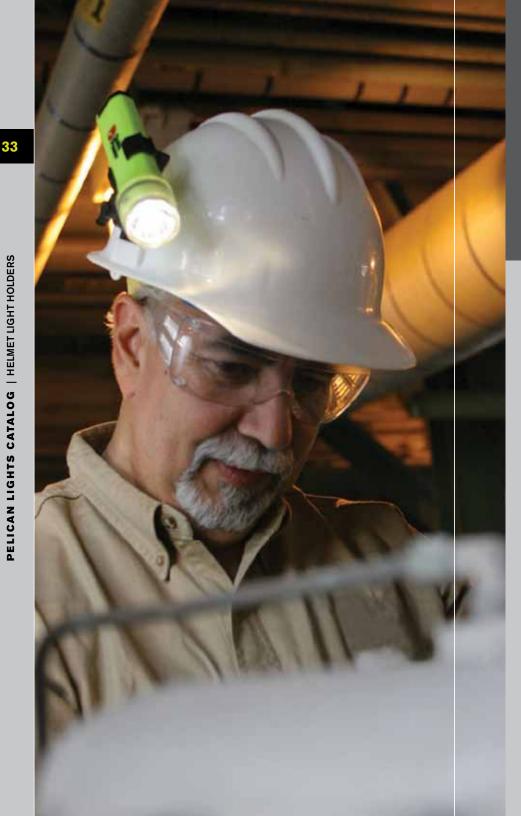

### HELMET LIGHT HOLDERS



770 UNIVERSAL HELMET LIGHT HOLDER Fits most known helmet designs and functions with 16 different Pelican flashlights. Tough polymer construction with brass inserts and stainless steel hardware.

### Fits the Following Pelican Lights:

- MityLite<sup>™</sup> 2300
   M6 2320
- M6 2330 LED
- MityLite<sup>™</sup> 2340 & 2340NVG
- M6 3W 2390 LED
- StealthLite<sup>™</sup> 2400, 2400NVG & 2400PL Photoluminescent
- StealthLite<sup>™</sup> 2410 Recoil<sup>™</sup> LED & 2410PL Recoil<sup>™</sup> LED Photoluminescent
- MityLite<sup>™</sup> 2430
- StealthLite<sup>™</sup> Rechargeable 2450
- StealthLite<sup>™</sup> Rechargeable 2460 Recoil<sup>™</sup> LED
- PM6 3320
- PM6 3330 LED
- Other Helmet Light Holders availble (see chart on next page)

### PELICAN<sup>™</sup> FLASHLIGHT

| 1900/NVG    |
|-------------|
| 1960        |
| 2140        |
| 2250        |
| 2300        |
| 2320        |
| 2330        |
| 2340/NVG    |
| 2390        |
| 2400/NVG/PL |
| 2410/PL     |
| 2430        |
| 2450        |
| 2460        |
| 3320        |
| 3330        |
|             |

|           | LIGHT HOLDER STYLE |           |           |           |           |           |           |  |  |  |  |  |  |  |
|-----------|--------------------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|--|--|--|--|
| CAT. #700 | CAT. #710          | CAT. #711 | CAT. #712 | CAT. #722 | CAT. #750 | CAT. #760 | CAT. #760 |  |  |  |  |  |  |  |
|           | Ō                  | Ö         | Ö         | i OBT     |           |           |           |  |  |  |  |  |  |  |
|           |                    |           |           | •         |           |           |           |  |  |  |  |  |  |  |
|           |                    |           |           | •         |           |           |           |  |  |  |  |  |  |  |
|           |                    |           |           |           | •         | •         |           |  |  |  |  |  |  |  |
| •         |                    |           |           |           | •         | ·         |           |  |  |  |  |  |  |  |
|           |                    |           |           | •         | •         | •         | •         |  |  |  |  |  |  |  |
|           |                    |           |           |           |           |           | •         |  |  |  |  |  |  |  |
|           |                    |           |           | •         | •         | •         | •         |  |  |  |  |  |  |  |
|           |                    |           |           |           |           |           | •         |  |  |  |  |  |  |  |
| •         | •                  | •         | •         |           | •         | •         | •         |  |  |  |  |  |  |  |
| •         | •                  | •         | •         |           | •         | •         | •         |  |  |  |  |  |  |  |
| •         | •                  | •         | •         |           | •         | •         | •         |  |  |  |  |  |  |  |
| •         | •                  | •         | •         |           | •         | •         | •         |  |  |  |  |  |  |  |
| •         | •                  | •         | •         |           | •         | •         | •         |  |  |  |  |  |  |  |
|           |                    |           |           |           |           |           | •         |  |  |  |  |  |  |  |
|           |                    |           |           |           |           |           | •         |  |  |  |  |  |  |  |

| Cat No. | Model Name  | Light<br>Source   | Batteries                    | Lumens                    | Runtime                        | Beam Spread              | Number<br>of LEDs                          | Lamp<br>Heads  | Approvals    | Length   | Weight                   | Colors |
|---------|---|-------------------|------------------------------|---------------------------|--------------------------------|--------------------------|--|--|--------------|--|--------------------------|--------|
| 9430    | 9430<br>Remote Area<br>Lighting System              | High Flux<br>LED  | 12v Rechargeable,<br>Sealed  | 1000 (Low)<br>2000 (High) | 15 hrs. (Low)<br>8 hrs. (High) | 90°                      | 24 LEDs<br>per head                        | 1  | N/A          | 15.75" (40 cm)<br>closed<br>32.28" (82 cm)<br>extended   | 22.65 lbs.<br>(10.27 kg) |        |
| 9430IR  | 9430IR<br>Infrared Remote Area<br>Lighting System   | Infrared<br>940nm | 12v Rechargeable,<br>Sealed  | N/A                       | 15 hrs. (Low)<br>8 hrs. (High) | N/A                      | 24 LEDs<br>per head                        | 1  | N/A          | 15.75" (40 cm)<br>closed<br>32.28" (82 cm)<br>extended   | 22.05 lbs.<br>(10 kg)    |        |
| 9430SL  | 9430SL<br>Spot Light Remote Area<br>Lighting System | High Flux<br>LED  | 12v Rechargeable,<br>Sealed  | 1000 (Low)<br>2000 (High) | 15 hrs. (Low)<br>8 hrs. (High) | 10°                      | 24 LEDs<br>per head                        | 1  | N/A          | 15.75" (40 cm)<br>closed<br>32.28" (82 cm)<br>extended   | 22.05 lbs.<br>(10 kg)    |        |
| 9435    | 9435<br>Remote Area<br>Lighting System              | High Flux<br>LED  | NiMH                         | 750 (Low)<br>1500 (High)  | 10 hrs. (Low)<br>5 hrs. (High) | 90°                      | 18 LEDs<br>per head                        | 1  | CI D2        | 15.75" (40 cm)<br>closed<br>32.28" (82 cm)<br>extended   | 17.6 lbs.<br>(7.98 kg)   |        |
| 9440    | 9440<br>Remote Area<br>Lighting System              | LED               | NiMH                         | 1200 (Low)<br>2400 (High) | 6 hrs. (Low)<br>3 hrs. (High)  | 120°                     | 10 LEDs<br>per head                        | 1  | N/A          | 37.4" (95 cm)<br>closed<br>86.25" (219 cm)<br>extended   | 16.09 lbs.<br>(7.3 kg)   |        |
| 9460    | 9460<br>Remote Area<br>Lighting System              | High Flux<br>LED  | 12v Rechargeable,<br>Sealed  | 2000 (Low)<br>4000 (High) | 14 hrs. (Low)<br>7 hrs. (High) | 90°                      | 24 LEDs<br>per head                        | 2  | N/A          | 22" (55.9 cm)<br>closed<br>70.87" (179.9 cm)<br>extended | 50.71 lbs.<br>(23 kg)    |        |
| 9470    | 9470<br>Remote Area<br>Lighting System              | High Flux<br>LED  | 12v Rechargeable,<br>Sealed  | 4000 (Low)<br>8000 (High) | 14 hrs. (Low)<br>7 hrs. (High) | 90°                      | 24 LEDs<br>per head                        | 4  | N/A          | 24.83" (63 cm)<br>closed<br>72.85" (185 cm)<br>extended  | 88.18 lbs.<br>(40 kg)    |        |
| 9500    | 9500<br>Shelter Lighting System                     | High Flux<br>LED  | N/A                          | 400 (Red)<br>2000 (White) | Constant 120V                  | 210°<br>Diffused         | 36 LEDs<br>per head<br>24 White/<br>12 Red | 3  | N/A          | 20.62" (52.4 cm)   | 29.8 lbs.<br>(13.52 kg)  |        |
| Cat No. | Model Name  | Light<br>Source   | Batteries                    | ANSI<br>Light Output      | ANSI<br>Runtime                | ANSI<br>Beam<br>Distance | ANSI<br>Peak Beam<br>Intensity             | ANSI<br>Waterproof/<br>Submersible/<br>Water Resistant | Approvals    | Length   | Weight with<br>Batteries | Colors |
| 1900    | MityLite™ 1900                                      | Xenon             | 2 AAA Alkaline<br>(Included) | 11<br>LUMENS              | 1h 30m                         | 45m                      | 571cd                                      | IPX7   | CI D1        | 4.09"<br>(10.4 cm)                                       | 1.6 oz.<br>(0.05 kg)     |        |
| 1910    | 1910 LED  | LED               | 1 AAA Alkaline<br>(Included) | 39<br>LUMENS              | 1h                             | 62m                      | 967cd                                      | IPX4   | N/A          | 3.6"<br>(9.1 cm)   | 1.4 oz.<br>(0.04 kg)     |        |
| 1920    | 1920 LED  | LED               | 2 AAA Alkaline<br>(Included) | 67<br>LUMENS              | 2h 45m                         | 81m                      | 1648cd                                     | IPX4   | N/A          | 5.3"<br>(13.5 cm)  | 2.2 oz.<br>(0.06 kg)     | •      |
| 1960    | MityLite™ 1960 LED                                  | LED               | 2 AAA Alkaline<br>(Included) | 24<br>LUMENS              | Зh                             | 51m                      | 657cd                                      | IPX7   | N/A          | 5.48"<br>(13.9 cm)                                       | 1.9 oz.<br>(0.05 kg)     |        |
| 1965    | MityLite™ 1965 LED                                  | LED               | 2 AAA Alkaline<br>(Included) | 21<br>LUMENS              | 4h                             | 51m                      | 756cd                                      | IPX4   | CI II III D1 | 5.48"<br>(13.9 cm)                                       | 1.9 oz.<br>(0.05 kg)     |        |
| 2140    | Tracker™ 2140                                       | Xenon             | 2 AAA Alkaline<br>(Included) | 13<br>LUMENS              | 2h                             | 84m                      | 1761cd                                     | IPX7   | CI D2        | 3.5"<br>(8.9 cm)   | 1.8 oz.<br>(0.05 kg)     |        |

35

| Cat No. | Model Name                            | Light<br>Source | Batteries  | ANSI<br>Light Output | ANSI<br>Runtime | ANSI<br>Beam<br>Distance | ANSI<br>Peak Beam<br>Intensity | ANSI<br>Waterproof/<br>Submersible/<br>Water Resistant | Approvals    | Length                               | Weight with<br>Batteries               | Colors |
|---------|---------------------------------------|-----------------|--|----------------------|-----------------|--------------------------|--------------------------------|--|--------------|--------------------------------------|--|--------|
| 2250    | VersaBrite™ 2250<br>Deluxe Light Kit  | Xenon           | 2 AA Alkaline<br>(Included)                        | 7<br>LUMENS          | 5h 30m          | 54m                      | 726cd                          | IPX4   | CI II D2     | 3.87"<br>(9.8 cm)                    | 3 oz.<br>(0.09 kg)                     |        |
| 2300    | MityLite™ 2300                        | Xenon           | 2 AA Alkaline<br>(Included)                        | 11<br>LUMENS         | 4h 30m          | 43m                      | 478cd                          | IPX4   | CI D1        | 5.62"<br>(14.3 cm)                   | 3.4 oz.<br>(0.1 kg)                    |        |
| 2340    | MityLite™ 2340                        | Xenon           | 2 AA Alkaline<br>(Included in select<br>packaging) | 10<br>LUMENS         | 4h 30m          | 43m                      | 461cd                          | IPX4   | CI D1        | 6.25"<br>(15.9 cm)                   | 3.5 oz.<br>(0.1 kg)                    |        |
| 1800    | PeliLite™ 1800                        | Xenon           | 2 C Alkaline<br>(Not included)                     | 21<br>LUMENS         | 7h              | 131m                     | 4370cd                         | IPX7   | CI II D2     | 6"<br>(15.2 cm)                      | 7.8 oz.<br>(0.22 kg)                   |        |
| 1820    | Pocket Sabre™ 1820                    | Xenon           | 2 C Alkaline<br>(Included in select<br>packaging)  | 22<br>LUMENS         | 6h 45m          | 146m                     | 5466cd                         | IPX7   | CI II III D2 | 5.83"<br>(14.8 cm)                   | 8.3 oz.<br>(0.24 kg)                   |        |
| 2000    | SabreLite™ 2000                       | Xenon           | 3 C Alkaline<br>(Not included)                     | 53<br>LUMENS         | 5h              | 158m                     | 6234cd                         | IPX7   | CI D2        | 7.79"<br>(19.8 cm)                   | 12.8 oz.<br>(0.36 kg)                  |        |
| 2000PL  | SabreLite™ 2000<br>Photoluminescent   | Xenon           | 3 C Alkaline<br>(Not included)                     | 53<br>LUMENS         | Бh              | 158m                     | 6234cd                         | IPX7   | CI D2        | 7.79"<br>(19.8 cm)                   | 12.8 oz.<br>(0.36 kg)                  |        |
| 2400    | StealthLite™ 2400                     | Xenon           | 4 AA Alkaline<br>(Included)                        | 45<br>LUMENS         | 3h 45m          | 125m                     | 3934cd                         | IPX7   | CI D1        | 6.49"<br>(16.5 cm)                   | 7.1 oz.<br>(0.2 kg)                    |        |
| 2400PL  | StealthLite™ 2400<br>Photoluminescent | Xenon           | 4 AA Alkaline<br>(Included)                        | 45<br>LUMENS         | 3h 45m          | 125m                     | 3934cd                         | IPX7   | CI D1        | 6.49"<br>(16.5 cm)                   | 7.1 oz.<br>(0.2 kg)                    |        |
| 2430    | MityLite™ 2430                        | Xenon           | 4 AA Alkaline<br>(Included)                        | 70<br>LUMENS         | 2h 15m          | 104m                     | 2766cd                         | IPX4   | CI D2        | 6.5"<br>(16.5 cm)                    | 6.1 oz.<br>(0.17 kg)                   |        |
| 2450    | StealthLite™<br>Rechargeable 2450     | Xenon           | 4 AA NiMH<br>(Included)                            | 35<br>LUMENS         | 3h 30m          | 122m                     | 3735cd                         | IPX7   | CI II D2     | 6.5"<br>(16.5 cm)                    | 7.8 oz.<br>(0.22 kg)                   |        |
| 2320    | M6 2320                               | Xenon           | 2 CR123 Lithium<br>(Included)                      | 82<br>LUMENS         | 1h 15m          | 145m                     | 5260cd                         | IPX4   | N/A          | 5.51"<br>(14 cm)                     | 5.6 oz.<br>(0.16 kg)                   |        |
| 3320    | PM6 3320                              | Xenon           | 2 CR123 Lithium<br>(Included)                      | 81<br>LUMENS         | 1h 30m          | 131m                     | 4330cd                         | IPX4   | N/A          | 5.27"<br>(13.4 cm)                   | 3.45 oz.<br>(0.1 kg)                   |        |
| 3390    | 3390 Knife/Lite Combo                 | Xenon           | 2 CR123 Lithium<br>(Included)                      | 81<br>LUMENS         | 1h 30m          | 131m                     | 4330cd                         | IPX4   | N/A          | 5.27"<br>(13.4 cm)<br>(light length) | 3.45 oz.<br>(0.1 kg)<br>(light weight) |        |
| 8040    | M10 8040                              | Xenon           | 4 C Alkaline<br>(Not included)                     | 67<br>LUMENS         | 5h 15m          | 198m                     | 9820cd                         | IPX4   | CI II III D2 | 11.25"<br>(28.6 cm)                  | 18.4 oz.<br>(0.52 kg)                  |        |
| 8050    | M11 Rechargeable 8050                 | Xenon           | 4 C NiCad<br>(Included)                            | 137<br>LUMENS        | 1h 30m          | 234m                     | 13,707cd                       | IPX4   | N/A          | 11.25"<br>(28.6 cm)                  | 17.92 oz.<br>(0.51 kg)                 |        |

PELICAN LIGHTS CATALOG | LIGHT SPECIFICATION CHARI

|                                     | Cat No. | Model Name   | Light<br>Source | Batteries                                      | ANSI<br>Light Output        | ANSI<br>Runtime    | ANSI<br>Beam<br>Distance | ANSI<br>Peak Beam<br>Intensity | ANSI<br>Waterproof/<br>Submersible/<br>Water Resistant | Approvals    | Length              | Weight<br>with<br>Batteries | Colors |
|-------------------------------------|---------|--|-----------------|--|-----------------------------|--------------------|--------------------------|--------------------------------|--|--------------|---------------------|-----------------------------|--------|
|                                     | 2330    | M6 2330 LED  | LED             | 2 CR123 Lithium<br>(Included)                  | 100<br>LUMENS               | 6h                 | 93m                      | 2184cd                         | IPX4   | N/A          | 5.51"<br>(14 cm)    | 5.5 oz.<br>(0.16 kg)        | - 1    |
| LIGHTS                              | 2360    | 2360 LED   | LED             | 2 AA Alkaline<br>(Not Included)                | 94<br>LUMENS                | 2h 15m             | 139m                     | 4893cd                         | IPX4   | N/A          | 6.1"<br>(15.5 cm)   | 4.6 oz.<br>(0.13 kg)        |        |
| 'Y LED                              | 2390    | M6 3W 2390 LED                                     | LED             | 2 CR123 Lithium<br>(Included)                  | 177<br>LUMENS               | 2h 30m             | 155m                     | 6002cd                         | IPX4   | N/A          | 5.31"<br>(13.5 cm)  | 5.6 oz.<br>(0.16 kg)        |        |
| AL/DUT                              | 3330    | PM6 3330 LED                                       | LED             | 2 CR123 Lithium<br>(Included)                  | 90<br>LUMENS                | 4h 45m             | 88m                      | 1959cd                         | IPX4   | N/A          | 5.27"<br>(13.4 cm)  | 3.45 oz.<br>(0.1 kg)        |        |
| TACTICAL/DUTY LED LIGHTS            | 7060    | 7060 LED   | LED             | 1 3.7 V, 2200<br>mAh Lithium-Ion<br>(Included) | 160<br>LUMENS               | 2h                 | 254m                     | 16,101cd                       | IPX4   | N/A          | 8.65"<br>(22 cm)    | 10.4 oz.<br>(0.29 kg)       | •      |
| -                                   | 8060    | 8060 LED   | LED             | 4 C SIZE Ni-MH<br>(Included)                   | 179<br>LUMENS               | 6h 45m             | 279m                     | 19,525cd                       | IPX4   | N/A          | 12.67"<br>(32.2 cm) | 23.2 oz.<br>(0.66 kg)       |        |
|                                     | 1830    | L4™ 1830 LED                                       | LED             | 3 AAAA Alkaline<br>(Included)                  | 5<br>LUMENS                 | 32h                | 13m                      | 44cd                           | IPX4   | CI D1        | 6.2"<br>(15.7 cm)   | 1.2 oz.<br>(0.03 kg)        |        |
|                                     | 1930    | L1™ 1930 LED                                       | LED             | 4 LR 44 Alkaline<br>(Included)                 | 12<br>LUMENS                | 4h 15m             | 17m                      | 70cd                           | IPX4   | CI D1        | 2.64"<br>(6.7 cm)   | 0.9 oz.<br>(0.03 kg)        |        |
|                                     | 2130    | Mini Flasher™ 2130 LED                             | LED             | 2 L1154 Alkaline<br>(Included)                 | 4.7<br>LUMENS<br>(Non ANSI) | 130h<br>(Non ANSI) | N/A                      | N/A                            | IPX7   | N/A          | 1.73"<br>(4.4 cm)   | 0.5 oz.<br>(0.01 kg)        |        |
| HTS                                 | 2130IR  | Mini Flasher™<br>2130IR LED                        | LED             | 2 L1154 Alkaline<br>(Included)                 | N/A                         | 65h<br>(Non ANSI)  | N/A                      | N/A                            | IPX7   | N/A          | 1.73"<br>(4.4 cm)   | 0.5 oz.<br>(0.01 kg)        |        |
|                                     | 2220    | VB3™ 2220 LED                                      | LED             | 2 CR2032 Lithium<br>(Included)                 | 9<br>LUMENS                 | 34h                | 12m                      | 38cd                           | IPX4   | CI D1        | 3.5"<br>(8.9 cm)    | 1 oz.<br>(0.03 kg)          |        |
| LED AND RECOIL <sup>TM</sup> LIGHTS | 2220NV  | VB3™ 2220NV LED                                    | LED             | 2 CR2032 Lithium<br>(Included)                 | 1<br>LUMEN<br>(Non ANSI)    | 100h<br>(Non ANSI) | N/A                      | N/A                            | IPX4   | C1D1         | 3.5"<br>(8.9 cm)    | 1 oz.<br>(0.03 kg)          |        |
| D AND                               | 2365    | 2365 LED Flex Neck                                 | LED             | 2 AA Alkaline<br>(Not Included)                | 49<br>LUMENS                | 7h                 | 81m                      | 1644cd                         | IPX4   | N/A          | 21.92"<br>(55.7 cm) | 9.3 oz.<br>(0.26 kg)        |        |
| E                                   | 2010    | SabreLite™ 2010<br>Recoil™ LED                     | Recoil™<br>LED  | 3 C Alkaline<br>(Not included)                 | 56<br>LUMENS                | 43h                | 74m                      | 1359cd                         | IPX7   | CI II III D1 | 8.11"<br>(20.6 cm)  | 13.4 oz.<br>(0.38 kg)       |        |
|                                     | 2010PL  | SabreLite™ 2010<br>Recoil™ LED<br>Photoluminescent | Recoil™<br>LED  | 3 C Alkaline<br>(Not included)                 | 56<br>LUMENS                | 43h                | 74m                      | 1359cd                         | IPX7   | CI II III D1 | 8.11"<br>(20.6 cm)  | 13.4 oz.<br>(0.38 kg)       |        |
|                                     | 2020    | SabreLite™ 2020<br>Recoil™ LED                     | Recoil™<br>LED  | 3 C Alkaline<br>(Not included)                 | 75<br>LUMENS                | 6h 30m             | 113m                     | 3211cd                         | IPX4   | CI II D1     | 8.75"<br>(22.2 cm)  | 14.7 oz.<br>(0.42 kg)       |        |
|                                     | 2410    | StealthLite™ 2410<br>Recoil™ LED                   | Recoil™<br>LED  | 4 AA Alkaline<br>(Included)                    | 72<br>LUMENS                | 7h 15m             | 102m                     | 2622cd                         | IPX7   | CI II III D1 | 7"<br>(17.8 cm)     | 7.3 oz.<br>(0.21 kg)        |        |



| Model Name   | Light<br>Source               | Batteries                       | ANSI<br>Light Output               | ANSI<br>Runtime                        | ANSI<br>Beam<br>Distance          | ANSI<br>Peak Beam<br>Intensity      | ANSI<br>Waterproof/<br>Submersible/<br>Water Resistant | Approvals    | Length             | Weight<br>with<br>Batteries | Colors |
|--|-------------------------------|---------------------------------|------------------------------------|--|-----------------------------------|-------------------------------------|--|--------------|--------------------|-----------------------------|--------|
| StealthLite™ 2410<br>Recoil™ LED<br>Photoluminescent | Recoil™<br>LED                | 4 AA Alkaline<br>(Included)     | 72<br>LUMENS                       | 7h 15m                                 | 102m                              | 2622cd                              | IPX7   | CI II III D1 | 7"<br>(17.8 cm)    | 7.3 oz.<br>(0.21 kg)        |        |
| StealthLite™<br>echargeable 2460<br>Recoil™ LED      | Recoil™<br>LED                | 4 AA NiMH<br>(Included)         | 73<br>LUMENS                       | 4h 15m                                 | 99m                               | 2454cd                              | IPX7   | CI II D2     | 7"<br>(17.8 cm)    | 7.8 oz.<br>(0.22 kg)        |        |
| 490 Recoil™ LED<br>with Traffic Wand)                | Recoil™<br>LED                | 4 AA Alkaline<br>(Not included) | 51<br>LUMENS                       | 15h                                    | 88m                               | 1930cd                              | IPX7   | N/A          | 12.5"<br>(31.7 cm) | 8.2 oz.<br>(0.23 kg)        |        |
| Little Ed™ 3610<br>Recoil™ LED                       | Recoil™<br>LED                | 4 AA Alkaline<br>(Included)     | 72<br>LUMENS                       | 7h 15m                                 | 102m                              | 2622cd                              | IPX7   | CI II III D1 | 7.51"<br>(19.1 cm) | 10.5 oz. (0.3<br>kg)        |        |
| Little Ed™ 3610<br>Recoil™ LED<br>Photoluminescent   | Recoil™<br>LED                | 4 AA Alkaline<br>(Included)     | 72<br>LUMENS                       | 7h 15m                                 | 102m                              | 2622cd                              | IPX7   | CI II III D1 | 7.51"<br>(19.1 cm) | 10.5 oz. (0.3<br>kg)        |        |
| e Ed™ Rechargeable<br>660 Recoil™ LED                | Recoil™<br>LED                | 4 AA NiMH<br>(Included)         | 73<br>LUMENS                       | 4h 15m                                 | 99m                               | 2454cd                              | IPX4   | CI II D2     | 7.51"<br>(19.1 cm) | 10.56 oz.<br>(0.3 kg)       |        |
| adsUp Lite™ 2600                                     | Krypton                       | 4 AA Alkaline<br>(Included)     | 18<br>LUMENS                       | 3h 30m                                 | 27m                               | 203cd                               | IPX7   | CI II III D2 | 3.81"<br>(9.7 cm)  | 9.7 oz.<br>(0.27 kg)        |        |
| adsUp Lite™ 2610<br>LED                              | LED                           | 3 AAA Alkaline<br>(Included)    | 30<br>LUMENS                       | 19h                                    | 28m                               | 194cd                               | IPX4   | CI D1        | 1.49"<br>(3.8 cm)  | 3.2 oz.<br>(0.09 kg)        |        |
| adsUp Lite™ 2620                                     | Xenon<br>(High)<br>LED Low)   | 3 AAA Alkaline<br>(Included)    | 26 (High)<br>14 (Low)<br>LUMENS    | 2h 15m<br>(High)<br>18h (Low)          | 44m (High)<br>29m (Low)           | 491cd (High)<br>216cd (Low)         | IPX4   | CI D1        | 2.16"<br>(5.5 cm)  | 4.8 oz.<br>(0.14 kg)        |        |
| adsUp Lite™ 2640                                     | Halogen<br>(High)<br>LED Low) | 4 AA Alkaline<br>(Included)     | 29 (High)<br>16 (Low)<br>LUMENS    | 2h 45m<br>(High)<br>17h (Low)          | 46m (High)<br>20m (Low)           | 586cd (High)<br>103cd (Low)         | IPX4   | CI D2        | 2.63"<br>(6.7 cm)  | 10.9 oz.<br>(0.31 kg)       |        |
| adsUp Lite™ 2680<br>Recoil™ LED                      | Recoil™<br>LED                | 4 AA Alkaline<br>(Included)     | 69<br>LUMENS                       | 9h 30m                                 | 123m                              | 3788cd                              | IPX7   | CI II III D2 | 4.64"<br>(11.8 cm) | 9.7 oz.<br>(0.27 kg)        |        |
| adsUp Lite™ 2690<br>LED                              | LED                           | 3 AAA Alkaline<br>(Included)    | 60<br>LUMENS                       | 10h 30m                                | 81m                               | 1664cd                              | IPX4   | CI II III D1 | 2.81"<br>(7.1 cm)  | 4.1 oz.<br>(0.12 kg)        |        |
| Big Ed™ 3700   | Krypton                       | 4 C Alkaline<br>(Not included)  | 39 (High)<br>25 (Backup)<br>LUMENS | 6h 15m<br>(High)<br>8h 30m<br>(Backup) | 98m<br>(High)<br>51m<br>(Backup)  | 2437cd (High)<br>684cd<br>(Backup)  | IPX4   | CI D2        | 7"<br>(17.8 cm)    | 20.32 oz.<br>(0.58 kg)      |        |
| Big Ed™ 3700<br>Photoluminescent                     | Krypton                       | 4 C Alkaline<br>(Not included)  | 39 (High)<br>25 (Backup)<br>LUMENS | 6h 15m<br>(High)<br>8h 30m<br>(Backup) | 98m<br>(High)<br>51m<br>(Backup)  | 2437cd (High)<br>684cd<br>(Backup)  | IPX4   | CI D2        | 7"<br>(17.8 cm)    | 20.32 oz.<br>(0.58 kg)      |        |
| Ed™ Rechargeable<br>3750                             | Krypton                       | 4 C NiCad<br>(Included)         | 96(High)<br>28 (Backup)<br>LUMENS  | 1h 45m<br>(High)<br>4h (Backup)        | 133m<br>(High)<br>65m<br>(Backup) | 4468cd (High)<br>1048cd<br>(Backup) | IPX4   | CI D2        | 7»<br>(17.8 cm)    | 20.48 oz.<br>(0.58 kg)      |        |
| Ed™ Rechargeable<br>0 Photoluminescent               | Krypton                       | 4 C NiCad<br>(Included)         | 96(High)<br>28 (Backup)<br>LUMENS  | 1h 45m<br>(High)<br>4h (Backup)        | 133m<br>(High)<br>65m<br>(Backup) | 4468cd (High)<br>1048cd<br>(Backup) | IPX4   | CI D2        | 7»<br>(17.8 cm)    | 20.48 oz.<br>(0.58 kg)      |        |

PELICAN LIGHTS CATALOG | LIGHT SPECIFICATION CHART

|             | Cat No. | Model Name  | Light<br>Source | Batteries                      | ANSI<br>Light Output              | ANSI<br>Runtime                  | ANSI<br>Beam<br>Distance        | ANSI<br>Peak Beam<br>Intensity          | ANSI<br>Waterproof/<br>Submersible/<br>Water Resistant | Approvals | Length             | Weight<br>with<br>Batteries | Colors |
|-------------|---------|---|-----------------|--------------------------------|-----------------------------------|----------------------------------|---------------------------------|---|--|-----------|--------------------|-----------------------------|--------|
|             | 1900N   | Nemo™ 1900  | Xenon           | 2 AAA Alkaline<br>(Included)   | 11<br>LUMENS                      | 1h 30m                           | 45m                             | 571cd                                   | IPX8   | N/A       | 4.09"<br>(10.4 cm) | 1.6 oz.<br>(0.05 kg)        |        |
|             | 1960N   | Nemo™ 1960  | LED             | 2 AAA Alkaline<br>(Included)   | 24<br>LUMENS                      | Зh                               | 51m                             | 657cd                                   | IPX8   | N/A       | 5.48"<br>(13.9 cm) | 1.9 oz.<br>(0.05 kg)        |        |
| TS          | 2000N   | Nemo™ 2000  | Xenon           | 3 C Alkaline<br>(Not included) | 53<br>LUMENS                      | Бh                               | 158m                            | 6234cd                                  | IPX8   | N/A       | 7.79"<br>(19.8 cm) | 12.8 oz.<br>(0.36 kg)       |        |
| DIVE LIGHTS | 2010N   | Nemo <sup>™</sup> 2010<br>Recoil <sup>™</sup> LED | Recoil™<br>LED  | 3 C Alkaline<br>(Not included) | 56<br>LUMENS                      | 43h                              | 74m                             | 1359cd                                  | IPX8   | N/A       | 8.11"<br>(20.6 cm) | 13.4 oz.<br>(0.38 kg)       |        |
| 20          | 2400N   | Nemo™ 2400  | Xenon           | 4 AA Alkaline<br>(Included)    | 45<br>LUMENS                      | 3h 45m                           | 125m                            | 3934cd                                  | IPX8   | N/A       | 6.49"<br>(16.5 cm) | 7.1 oz.<br>(0.2 kg)         |        |
|             | 2410N   | Nemo <sup>™</sup> 2410<br>Recoil <sup>™</sup> LED | Recoil™<br>LED  | 4 AA Alkaline<br>(Included)    | 72<br>LUMENS                      | 7h 15m                           | 102m                            | 2622cd                                  | IPX8   | N/A       | 7"<br>(17.8 cm)    | 7.3 oz.<br>(0.21 kg)        |        |
|             | 4300N   | Nemo™ 4300  | Xenon           | 8 C Alkaline<br>(Not included) | 276<br>LUMENS<br>(Non ANSI)       | 6h                               | 143m                            | 5222cd                                  | IPX8   | N/A       | 7.5"<br>(19 cm)    | 36.64 oz.<br>(1.04 kg)      |        |
| DUTY        | 4000    | KingLite <sup>™</sup> 4000                        | Xenon           | 8 D Alkaline<br>(Not included) | 251<br>LUMENS<br>(Non ANSI)       | 11h                              | 106m                            | 3168cd                                  | IPX4   | CI II D2  | 9.37"<br>(23.8 cm) | 74.08 oz.<br>(2.1 kg)       |        |
| HEAVY DUTY  | 9410    | 9410 LED Lantern                                  | LED             | 4 D Ni-MH<br>(Included)        | 710 (High)<br>300 (Low)<br>LUMENS | 1h 45m<br>(High)<br>4h 45m (Low) | 425m<br>(High)<br>249m<br>(Low) | 45,260cd<br>(High)<br>15,516cd<br>(Low) | IPX4   | N/A       | 8.75"<br>(22.2 cm) | 49.28 oz.<br>(1.4 kg)       |        |







PELICAN AND PELICAN STORM CASES



SPECIALTY PRODUCTS



### **PRIVATE LABEL**

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom

applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable epoxy inks and foils in our screening, hot tipping, embossing, and molding programs.



GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



**HOT STAMPING** DEPARTMENT Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.







MICRO CASES



**ROTO MOLDED PRODUCTS** 

**CASES AND SPECIALTY PRODUCTS** 

The same durability and ingenuity built into every Pelican light also sets our cases and specialty products apart. We are protecting equipment in the world's harshest environments.

- Watertight cases for wet conditions
- Long cases for military and law enforcement
- Specialized laptop and organization solutions for off site jobs
- Micro Case protection for small electronics
- Specialty products for portable workspace and organization solutions

SEE OUR COMPLETE LINE OF CASES AND SPECIALTY PRODUCTS AT

### WWW.PELICAN.COM

### FLASHLIGHTS

Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries (rechargeable or alkaline).

Pelican will either repair or replace any defective product, at our sole option. THE REMEDIES HEREBY PROVIDED SHALL BE THE EXCLUSIVE AND SOLE REMEDY OF THE PURCHASER.

## are claimed.

To make a warranty claim, the purchaser must contact Pelican Products, Inc. at 23215 Early Avenue, Torrance, CA 90505 or sales@pelican.com. Any warranty claims shall be made by the purchaser as soon as practicable. The purchaser must obtain a return authorization number from Pelican Customer Service prior to returning any product. In the event that Pelican determines that any returned product is not defective, within the terms of this warranty, the purchaser shall pay Pelican all costs of handling, transportation and repairs at Pelican's prevailing rates.

or accident.

Pelican Products, Inc. ("Pelican") warrants to the original purchaser its Remote Area Lighting Systems (RALS) and all other products manufactured by the Advanced Area Lighting Group (AALG) against defects in materials and workmanship under normal use, service, and maintenance for a period of twelve months from the date of purchase. This warranty applies only to the original purchaser and is not transferable.

are claimed.

With valid dated proof of purchase, Pelican will either repair or replace ay defective part, at our sole option. THE REMEDIES HEREBY PROVIDED SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF THE ORIGINAL PURCHASER. Any repaired or replacement part or unit is covered only for the unexpired portion of the warranty on the original product purchased.

To make a warranty claim, the purchaser must contact Pelican Products, Inc. at 23215 Early Avenue, Torrance, CA 90505 or sales@pelican.com. Any warranty claims shall be made by the original purchaser as soon as practicable following discovery of any defect and in no event more than twelve months from the date of purchase. The purchaser must provide valid dated proof of purchase and obtain a return authorization number from Pelican Customer Service prior to returning any product. In the event that Pelican determines that the returned product is not defective, within the terms of this warranty, the purchaser shall pay Pelican all costs of handling, transportation and repairs at Pelican's prevailing rates.

All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

### International Sales Offices

Barcelona, Spain

Dusseldorf, Germany Edmonton, Canada Tokyo, Japan Svdnev. Australia Shanghai, China Bourg en Bresse, France Dubai, UAE shford. UK Copenhagen, Denmark Poznań, Poland lstanbul, Turkey Johannesburg, South Africa Tel Aviv, Israel Sao Paolo. Brazil Miami. Florida (Latin America) Seoul, S. Korea lew Delhi. India

- N

1

### Manufacturing Facilities

rrance. Califor . Deerfield, Massachuse Freenfield, Indiana larket Deeping, UK Crottendorf, Germany Melbourne. Australia

### Advanced Case Centers

- Chino. California Northampton, Massachuse Austin, Texas
- Kennesaw, Georgia

**Corporate Office** 

orrance. Californi

- Front Royal, Virginia
- St-Jean-sur-Richelieu, Canad
- Saint Denis, France
- Ashford Kent.UK

### PELICAN LEGENDARY FULL LIFETIME GUARANTEE OF EXCELLENCE

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELICAN BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE. In no event shall Pelican's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages

All warranty claims of any nature are barred if the flashlight has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

### Lifetime Guarantee does not cover Roto Molded or AALG products.

### **REMOTE AREA LIGHTING SYSTEMS**

### PELICAN 1 YEAR LIMITED WARRANTY FOR AALG PRODUCTS

TO THE EXTENT PERMITTED BY LAW: (A) THIS WARRANTY IS IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; AND (B) ALL OTHER IMPLIED WARRANTIES AND ANY LIABILITY NOT BASED UPON CONTRACT ARE HEREBY DISCLAIMED AND EXCLUDED.

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELICAN BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE. In no event shall Pelican's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages

### **U.S.A**.

### CALIFORNIA

23215 Early Avenue Torrance, CA 90505 Tel: 310.326.4700 800.473.5422 Fax: 310.326.3311 www.pelican.com

### MASSACHUSETTS

147 North Main Street South Deerfield, MA 01373 Tel: 800.542.7344 Fax: 413.665.8330 www.pelican.com

### INDIANA

3802 N 600 W # B Greenfield, IN 46140-9642 Tel: 317.866.2040 www.pelican.com

### INTERNATIONAL

### EUROPE, MIDDLE EAST, & AFRICA Peli Products, S.L.U. c/ Provença, 388, Planta 7 08025 · Barcelona, Spain Tel: +34 934 674 999 Fax: +34 934 877 393

www.peli.com

### CANADA

Pelican Products. Inc. 10221-184th Street Edmonton, Alberta T5S 2J4 Canada Tel: 780.481.6076 Fax: 780.481.9586 www.pelican.ca

### CHINA

Pelican Products China Representative Office Pine City Building, Room 1026 777 Zhaojiabang Road Shanghai, China 200032 Tel +86.21.64189685 Fax +86.21.64189679 www.pelican.com/cn 

### AUSTRALIA

Pelican Products Pty Ltd Suite 2.33, Platinum West 4 Ilya Avenue, Erina NSW 2250 Australia Ph: +612 4367 7022 Fax: +612 4367 7066 www.pelicanaustralia.com

### JAPAN

Pelican Products K.K. Nisso 22 Bldg 9F 1-11-10 Azabu Dai Minato ward Tokyo 106-0041 Japan Tel +81 33 585 9100 Fax +81 33 585 9109 www.pelican.com/jp

### KOREA

Pelican Products Korea Ltd #909 Hyundai 41 Tower, 917-9, Mok-dong, Yangchon-gu, Seoul, Korea Tel: +82 2 6092 4700 Fax: +82 2 6792 4700 www.pelican.com/ko

### INDIA

Pelican Products and Services India Pvt. Ltd Level "4", Augusta Point, Sector-53, Golf Course Road, Gurgaon 122002 Haryana, India Tel: +91 124 4354148 Fax: +91 124 4354001 www.pelican.com

### **DISTRIBUTED BY:**



©2011 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

Part No. 0030-000-200 SEP.11

Cordura® is a registered trademark of INVISTA Lexan® is a registered trademark of SABIC



